UDP Header

Bit Number

1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1

Source Port	Destination Port
Length	Checksum

UDP Header Information

Common UDP Well-Known Server Ports

```
  7 echo                  138 netbios-dgm
 19 chargen               161 snmp
 37 time                  162 snmp-trap
 53 domain                500 isakmp
 67 bootps (DHCP)         514 syslog
 68 bootpc (DHCP)         520 rip
 69 tftp                33434 traceroute
137 netbios-ns
```

Length
(Number of bytes in entire datagram including header; minimum value = 8)

Checksum
(Covers pseudo-header and entire UDP datagram)

ARP

Bit Number

1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1

Hardware Address Type		Protocol Address Type
H/w Addr Len	Prot. Addr Len	Operation
Source Hardware Address		
Source Hardware Addr (cont.)		Source Protocol Address
Source Protocol Addr (cont.)		Target Hardware Address
Target Hardware Address (cont.)		
Target Protocol Address		

ARP Parameters (for Ethernet and IPv4)

Hardware Address Type
1 Ethernet
6 IEEE 802 LAN

Protocol Address Type
2048 IPv4 (0x0800)

Hardware Address Length
6 for Ethernet/IEEE 802

Protocol Address Length
4 for IPv4

Operation
1 Request
2 Reply

DNS

Bit Number

1 1 1 1 1 1
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5

ID.							
QR	Opcode	AA	TC	RD	RA	Z	RCODE
QDCOUNT							
ANCOUNT							
NSCOUNT							
ARCOUNT							
Question Section							
Answer Section							
Authority Section							
Additional Information Section							

DNS Parameters

Query/Response
0 Query
1 Response

Opcode
0 Standard query (QUERY)
1 Inverse query (IQUERY)
2 Server status request (STATUS)

AA
(1 = Authoritative Answer)

TC
(1 = TrunCation)

RD
(1 = Recursion Desired)

RA
(1 = Recursion Available)

Z
(Reserved; set to 0)

Response code
0 No error
1 Format error
2 Server failure
3 Non-existant domain (NXDOMAIN)
4 Query type not implemented
5 Query refused

QDCOUNT
(No. of entries in Question section)

ANCOUNT
(No. of resource records in Answer section)

NSCOUNT
(No. of name server resource records in Authority section)

ARCOUNT
(No. of resource records in Additional Information section.

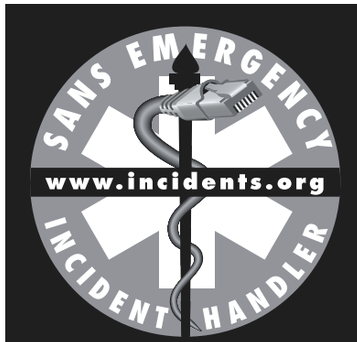

TCP/IP and tcpdump

Pocket Reference Guide

SANS Institute
incidents@sans.org
+1 317.580.9756
http://www.sans.org
http://www.incidents.org

tcpdump Usage

```
tcpdump  [-aenStvx]  [-F file]
[-i int]  [-r file]  [-s snaplen]
[-w file]  ['filter_expression']

-e  Display data link header.
-F  Filter expression in file.
-i  Listen on int interface.
-n  Don't resolve IP addresses.
-r  Read packets from file.
-s  Get snaplen bytes from each packet.
-S  Use absolute TCP sequence numbers.
-t  Don't print timestamp.
-v  Verbose mode.
-w  Write packets to file.
-x  Display in hex.
-X  Display in hex and ASCII.
```

Acronyms

AH	Authentication Header (RFC 2402)	ISAKMP	Internet Security Association & Key Management Protocol (RFC 2408)
ARP	Address Resolution Protocol (RFC 826)		
BGP	Border Gateway Protocol (RFC 1771)	L2TP	Layer 2 Tunneling Protocol (RFC 2661)
CWR	Congestion Window Reduced (RFC 2481)	NNTP	Network News Transfer Protocol (RFC 977)
DF	Don't Fragment bit (IP)	OSPF	Open Shortest Path First (RFC 1583)
DHCP	Dynamic Host Configuration Protocol (RFC 2131)	POP3	Post Office Protocol v3 (RFC 1460)
DNS	Domain Name System (RFC 1035)	RFC	Request for Comments
ECN	Explicit Congestion Notification (RFC 3168)	RIP	Routing Information Protocol (RFC 2453)
EIGRP	Extended IGRP (Cisco)	LDAP	Lightweight Directory Access Protocol (RFC 2251)
ESP	Encapsulating Security Payload (RFC 2406)	SKIP	Simple Key-Management for Internet Protocols
FTP	File Transfer Protocol (RFC 959)	SMTP	Simple Mail Transfer Protocol (RFC 821)
GRE	Generic Routing Encapsulation (RFC 2784)	SNMP	Simple Network Management Protocol (RFC 1157)
HTTP	Hypertext Transfer Protocol (RFC 1945)	SSH	Secure Shell
ICMP	Internet Control Message Protocol (RFC 792)	SSL	Secure Sockets Layer (Netscape)
IGMP	Internet Group Management Protocol (RFC 2236)	TCP	Transmission Control Protocol (RFC 793)
IGRP	Interior Gateway Routing Protocol (Cisco)	TFTP	Trivial File Transfer Protocol (RFC 1350)
IMAP	Internet Message Access Protocol (RFC 2060)	TOS	Type of Service field (IP)
IP	Internet Protocol (RFC 791)	UDP	User Datagram Protocol (RFC 768)

All RFCs can be found at http://www.rfc-editor.org

ICMP

Bit Number

1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1

Type	Code	Checksum
Other message-specific information...		

Type Name/Codes (Code=0 unless otherwise specified)

```
 0  Echo Reply
 3  Destination Unreachable
      0 Net Unreachable
      1 Host Unreachable
      2 Protocol Unreachable
      3 Port Unreachable
      4 Fragmentation Needed & DF Set
      5 Source Route Failed
      6 Destination Network Unknown
      7 Destination Host Unknown
      8 Source Host Isolated
      9 Network Administratively Prohibited
     10 Host Administratively Prohibited
     11 Network Unreachable for TOS
     12 Host Unreachable for TOS
     13 Communication Administratively Prohibited
 4  Source Quench
 5  Redirect
      0 Redirect Datagram for the Network
      1 Redirect Datagram for the Host
      2 Redirect Datagram for the TOS & Network
      3 Redirect Datagram for the TOS & Host
 8  Echo
 9  Router Advertisement
10  Router Selection
11  Time Exceeded
      0 Time to Live exceeded in Transit
      1 Fragment Reassembly Time Exceeded
12  Parameter Problem
      0 Pointer indicates the error
      1 Missing a Required Option
      2 Bad Length
13  Timestamp
14  Timestamp Reply
15  Information Request
16  Information Reply
17  Address Mask Request
18  Address Mask Reply
30  Traceroute
```

PING (Echo/Echo Reply)

Bit Number

1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1

Type (8 or 0)	Code (0)	Checksum
Identifier		Sequence Number
Data...		

IP Header

Bit Number

1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1

Version	IHL	Type of Service	Total Length
Identification		Flags	Fragment Offset
Time to Live	Protocol	Header Checksum	
Source Address			
Destination Address			
Options (optional)			

IP Header Contents

Version
4 IP version 4

Internet Header Length
Number of 32-bit words in IP header; minimum value = 5 (20 bytes) & maximum value = 15 (60 bytes)

Type of Service (PreDTRCx) --> Differentiated Services

Precedence (000-111)	000
D (1 = minimize delay)	0
T (1 = maximize throughout)	0
R (1 = maximize reliability)	0
C (1 = minimize cost)	1 = ECN capable
x (reserved and set to 0)	1 = congestion experienced

Total Length
Number of bytes in packet; maximum length = 65,535

Flags (xDM)
x (reserved and set to 0)
D (1 = Don't Fragment)
M (1 = More Fragments)

Fragment Offset
Position of this fragment in the original datagram, in units of 8 bytes

Protocol

1 ICMP	17 UDP	57 SKIP
2 IGMP	47 GRE	88 EIGRP
6 TCP	50 ESP	89 OSPF
9 IGRP	51 AH	115 L2TP

Header Checksum
Covers IP header only

Addressing

NET_ID	RFC 1918 PRIVATE ADDRESSES
0-127 Class A	10.0.0.0-10.255.255.255
128-191 Class B	172.16.0.0-172.31.255.255
192-223 Class C	192.168.0.0-192.168.255.255

224-239 Class D (multicast)
240-255 Class E (experimental)

HOST_ID
0 Network value; broadcast (old)
255 Broadcast

Options (0-40 bytes; padded to 4-byte boundary)

0 End of Options list	68 Timestamp
1 No operation (pad)	131 Loose source route
7 Record route	137 Strict source route

TCP Header

Bit Number

1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 3 3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1

Source Port			Destination Port
Sequence Number			
Acknowledgment Number			
Offset (Header Length)	Reserved	Flags	Window
Checksum			Urgent Pointer
Options (optional)			

TCP Header Contents

Common TCP Well-Known Server Ports

7 echo	110 pop3
19 chargen	111 sunrpc
20 ftp-data	119 nntp
21 ftp-control	139 netbios-ssn
22 ssh	143 imap
23 telnet	179 bgp
25 smtp	389 ldap
53 domain	443 https (ssl)
79 finger	445 microsoft-ds
80 http	1080 socks

Offset
Number of 32-bit words in TCP header; minimum value = 5

Reserved
4 bits; set to 0
ECN bits (used when ECN employed; else 00)
CWR (1 = sender has cut congestion window in half)
ECN-Echo (1 = receiver cuts congestion window in half)

Flags (UAPRSF)
U (1 = Urgent pointer valid)
A (1 = Acknowledgement field value valid)
P (1 = Push data)
R (1 = Reset connection)
S (1 = Synchronize sequence numbers)
F (1 = no more data; Finish connection)

Checksum
Covers pseudoheader and entire TCP segment

Urgent Pointer
Points to the sequence number of the byte following urgent data.

Options

0 End of Options list	3 Window scale
1 No operation (pad)	4 Selective ACK ok
2 Maximum segment size	8 Timestamp