

# PiRover

By Christopher Albarillo, Lawrence Puig, and Patrick Ng

March 12, 2018

Project Build Website: <https://chris0707.github.io/PiRover/>

## Declaration of Joint Authorship

We, the PiNivea group, here by declare that the project report entitled “PiRover” confirm that this work submitted for assessment is our own and is expressed in our own words. Any sources and material used are all cited and documented. A list of references that were used for this project is provided and can be found under Technical References section.

PiNivea: Christopher Albarillo, Lawrence Puig, and Patrick Ng.

Date: February 23, 2017



## Proposal

### Executive Summary

As students in the Computer Engineering Technology program, we will be integrating the knowledge and skills we have learned from our program. This proposal requests the approval to build the hardware portion, which is the PiRover, that will connect to a mobile device application using Bluetooth connection. The mobile device functionality will allow the user to register and login their information, gain access wirelessly to control the hardware(PiRover), voice commands to control the PiRover's features (lights and code execution).

### Background

We believe that the most difficult part of this project is building the script that will handle the voice command functionality that will control the PiRover's pre-implemented features such as; lights and other code executions.

This prototype project that our team has constructed has been inspired by other rovers such as NASA's own rover. By utilizing all of the abilities acquired in our previous Hardware course we have gained further knowledge and become accustomed to the further advancements we are applying into the prototype. The PiRover was designed to be controlled via Bluetooth with an android application from any android device. With this feature working, we plan to implement other features such as; lights, voice activations and maybe further perfect the controller from the android application.

## Methodology

This proposal is assigned in the first week of class and is due at the beginning of class in the second week of the winter semester. My coursework will focus on the first two of the 3 phases of this project:

Phase 1 Hardware build.

Phase 2 System integration.

Phase 3 Demonstration to future employers.

### *Phase 1 Hardware build*

The hardware build has been completed in the fall term and will finish it with an enclosed case for protection and stability this winter term. It will fit within the CENG Project maximum dimensions of 12 13/16" x 6" x 2 7/8" (32.5cm x 15.25cm x 7.25cm) which represents the space below the tray in the parts kit. The highest AC voltage that will be used is 16Vrms from a wall adaptor from which +/- 15V or as high as 45 VDC can be obtained. Maximum power consumption will be 20 Watts.

### *Phase 2 System integration*

The system integration will be completed in the winter term.

### *Phase 3 Demonstration to future employers*

This project will showcase the knowledge and skills that I have learned to potential employers.

The brief description below provides rough effort and non-labour estimates respectively for each phase. A Gantt chart will be added by week 3 to provide more project schedule details and a more complete budget will be added by week 4. It is important to start tasks as soon as possible to be able to meet deadlines.

Labour Estimate	Hrs	Notes
<b>Phase 1</b>		
Writing Proposal	9	Tech Identification Quiz
Creating Project Schedule	9	Proposal Due
Creating Budget (Mock group setup for CENG355/Phase 2)	9	Project Schedule Due
Acquiring Components / Begin to film unboxing	9	Project Budget Due
PCB Fabrication	9	Component received for the project
Mechanical Assembly / Status Meeting	9	Showing acquisition for the project
Finish off the PCB	9	Mechanical Assembly Due
Writing 30 second Video Script and creating Placard	9	PCB Due

Design		
Creating 30 second Video with the script created and Demonstration the hardware	9	Video Script and Placard Due
Writing Progress Report	9	30 second Video Due
Creating the Hardware Presentation	9	Progress Report Due
1 <sup>st</sup> round of presentation and Writing build report	9	Presentation Due
2 <sup>nd</sup> round of presentation	9	Build Report Due
<b>Phase 1 Total</b>	<b>117</b>	
<b>Phase 2</b>		
Recreate the Proposal	9	Form the group for the project
Meeting with collaborators (SRS)	9	Proposal Due
Status Meeting	9	SRS Due
Meeting with collaborators(Abstract, Introduction and Declaration of Authorship)	9	Family Day Holiday – No Class
Meeting with collaborators (Email Progres Report by Student A)	9	Abstract, Introduction and Declaratiob of Authorship Due
Meeting with collaborators	9	Group Status Progress Report

(Merged Build Instruction ported to Technical Report and App, Web and Database Independent Demonstration)		Due
Meeting with collaborators(Email Progress Report by Student B)	9	Merged Build Instruction ported to Technical Report and App, Web and Database Independent Demonstration Due
Meeting with collaborators(OACETT basic requirement report checklist)	9	Integration Progress Report Due
Meeting with collaborators(Email Progress Report by Student C)	9	OACETT basic requirement report checklist Due
Prepare for Demonstration	9	Troubleshooting Progress Report Due
Prepare for Presentation	9	Demonstration Due
Writing Technical Report	9	Presentation Due
Extra Day	N/A	Technical Report Due
<b>Phase 2 Total</b>	<b>108</b>	
<b>Phase 3</b>		
Interviews	TBD	
<b>Phase 3 Total</b>	<b>TBD</b>	



<b>Material Estimate</b>	<b>Cost with tax</b>	<b>Quantity</b>
Raspberry PI Starter Kit	\$112.99	1
Electronic Learning Kit for RaspPi	\$19.05	1
100000mAh Portable Power Bank	\$23.72	1
Micro Servo Motor FS90R	\$21.00	2
Ultrasonic Sensor HC-SR04	\$5.00	1
Laserut Chasis from Humber	N/A	1
3D Printed Wheels from Humber	N/A	1
Total	\$181.67	

### Concluding Remarks

This proposal presents a plan for providing an IoT solution for search and rescue situations or even for historical research. This is an opportunity to integrate the knowledge and skills developed in our program to create a collaborative IoT capstone project demonstrating our ability to learn how to support projects such as the initiative described by T. Kubota, Y. Kuroda, Y. Kunii and T. Yoshimitsu, "Path planning for newly developed microrover," Proceedings 2001 ICRA. IEEE International Conference on Robotics and Automation (Cat. No.01CH37164), 2001, pp. 3710-3715 vol.4.

doi: 10.1109/ROBOT.2001.933195

keywords: {computerised navigation;data structures;microrobots;mobile robots;path planning;planetary rovers;probability;data structure;elevation map;mobile robots;navigation;path

planning;planetary exploration;planetary microrover;probability;Data  
structures;Instruments;Mars;Mobile robots;Moon;NASA;Navigation;Path planning;Rain;Space  
exploration},

URL: <http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=933195&isnumber=20185>

We request approval of this project.

## Abstract

Technology is growing fast and is considered to be a powerful tool to help us in our daily lives. One of these technologies that lead us to our project is the rover, that can be controlled wirelessly and also can fit in small and tight spaces which no average person can fit into. In addition, it gives the researchers comfortability to not worry about the dangers of a certain place that they will explore. Having a rover can benefit a lot of situations such as: outdoor research, emergency situations, and for learning purposes. However, with such technology that has a lot to offer, also comes with an incredible amount of price. This is where our project will come to play. Our project, PiRover, is a portable rover that is powered by an open source computer called Raspberry Pi. In this project, we focused on the portability, low cost, and functionality of the PiRover. This gives the people opportunity to get themselves their own rover for a lower cost to explore and learn using the PiRover at the same time.

## Table of Contents

PiRover.....	1
Declaration of Joint Authorship.....	3
Proposal.....	5
Executive Summary.....	5
Background.....	5
Methodology.....	6
Concluding Remarks.....	11
Abstract.....	13
Table of Contents.....	15
Illustration List.....	17
1. Introduction.....	19
1.1 Purpose of Documentation.....	19
1.2 Scope.....	19
1.3 Definitions, Acronyms, and Abbreviations.....	20
2. Software Requirement Specifications (SRS).....	21
2.1 Purpose.....	21
2.2 Overall Description.....	21
2.2.1 System Interface.....	21
2.3 Hardware.....	21
2.3.1 Components.....	21
2.3.2 Chasis Specifications.....	22
2.3.3 Motor and PCB(Optional) Specifications.....	22
2.4 Mobile Application.....	23
2.4.1 Database.....	24
2.4.2 Connectivity.....	24
2.5 External Interface Requirements.....	24
2.6 System Features.....	24
3 Progress Report.....	27
4 Conclusion.....	29
5 Recommendations.....	31
6 Technical References.....	33

<a href="#">7</a> Appendices.....	35
-----------------------------------	----


## 1. Illustration List

### 1.1 Definitions, Acronyms, and Abbreviations

TERM	DEFINITION
<b>PIROVER</b>	Title of the project and name of both the prototype and android application
<b>PCB</b>	Printed Circuit Board – Used to compact the connections into a flat board
<b>BLUETOOTH</b>	Used to Connect wirelessly from device to device to exchange data
<b>DATABASE</b>	Holds information in a server, such as; security information
<b>GUI</b>	Graphical User Interface – an interface that allows users to access functions in a user friendly manner.
<b>DATABASE</b>	A structured set of data held in a computer or server
<b>ANDROID STUDIO</b>	The IDE that can be downloaded from Google, used to create mobile application
<b>IDE</b>	Integrated Development Environment

### 1.2 System Diagram

Overview of the system diagram:

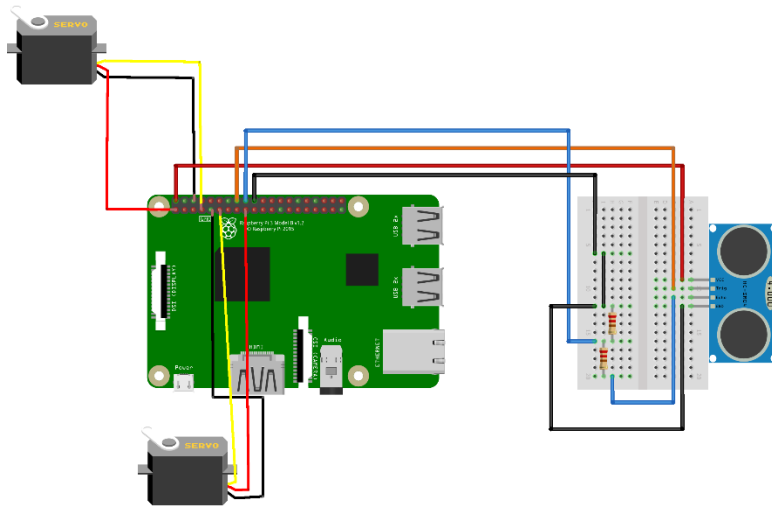

fritzing **Introduction**

2.

## 1. Purpose of Documentation

The purpose of this documentation is to give a detailed outlook of the prototype, “PiRover”, and the requirements, hardware, software and other features associated with the prototype. This documentation is primarily intended as a reference and for the development of the PiRover.

## 2. Scope

The PiRover is a micro rover prototype used to explore area such as small/tight spaces which the average person could not fit into or areas that are dangerous. For example, outer space, scientists can use this to explore areas that they deem not safe for humans. The hardware will contain two FS90R micro servo motor to rotate the wheels, HC-SR04 Ultrasonic Sensor to send out a pressure wave to detect foreign objects in its path. PiRover also has an Android application where the user can control the rover wireless via Bluetooth. Due to the application only being Android, this restricts any other users that don’t have Android device that is compatible to 5.0 (API 21)

Once the hardware is complete and the Android application is installed on your device, you will need to register in order to use the application with certain preferences that you would like to be saved. Afterward, when you have login with the newly created account, it will prompt what type of control that the user wants and they can start using it. The hardware will send data to the database if it is connected to the internet. An Internet connection is not required in order to use this application but is recommended.

The database information stored from the hardware will be visible to the user on their Android device. On the mobile application, the user has to be logged in to access this information as well as having internet connection to allow the application to pull the information from the database.

### 3. Software Requirement Specifications (SRS)

#### 1. Purpose

The purpose of our software is to provide full control of the PiRover(Hardware). Using the mobile application, it enables the user to control the PiRover manually and automatically and have his/her own account to simply store the PiRover's collected data in the database.

#### 2.2 Overall Description

##### 2.2.1 System Interface

The system interface for our project consists of the following: PiRover hardware, mobile application, and a database server. The user will have full control of the PiRover using the mobile application. When the user chooses the option to control the PiRover automatically, it will run



autonomously while recording data and having an option to review and store the information in the database.

## 2.3 Hardware

Our hardware is called PiRover. Once the PiRover has booted up, it will automatically open a Bluetooth server connection. It should be able to receive the connection from the mobile device that the hardware is currently paired with. Once the connection is established, the user can now control the PiRover manually and automatically. Patrick Ng will be leading this section.

### 2.3.1 Components

PiRover Components:

- Raspberry Pi 3
- UltraSonic Sensor HC-SR04
- 10000mAh Portable Power Bank
- Micro Servo Motor FS90R (x2)
- Laser cut Chassis from Humber College
- 3D Printed wheels from Humber College
- PCB Printed from Humber College
- USB Microphone

### 2.3.2 Chassis Specifications

Chassis Size:

Width – 8.99cm

Height – 5.99cm

### 2.3.3 Motor and PCB(Optional) Specifications

#### Motor Specifications:

Size:

23.2mm x 12.5mm x 22mm

General Specifications (at 6V):

Free-run current: 120 mA

Stall current: 800 mA

Speed: 130 rpm

Stall Torque: 21 oz-in


General Specifications (at 4.8V):

Speed: 100 rpm

Stall torque 18 oz-in

Lead Length: 10 in

#### PCB Specifications:

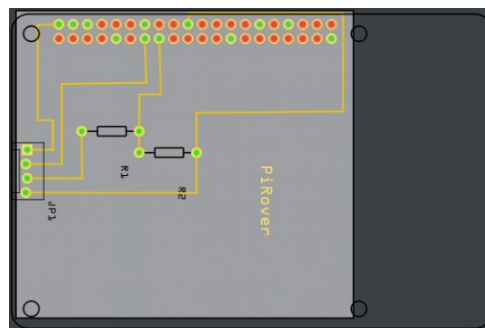

PCB Size:

Width – 55mm

Height – 60mm

## 2.4 Mobile Application

Our mobile application is called PiRover controller. The mobile application is only available for android users only. Once the app is opened, it will give the user options to – login, register, and proceed in offline mode. After the user has logged in, there will be two control options provided for the user: manual and automatic. If the user selected manual, he/she will have the ability to control the PiRover using the manual controls provided. And if the user selected automatic, he/she will only have one option to control the PiRover, and that is by selecting or clicking the button “start automap”. Lawrence Puig will be leading this section.

### 2.4.1 Database

The database server that is being used in this project is the Hostinger’s database. Using the database, it enables us to store user’s information, as well as the data that will be gathered by the PiRover. This will give the user comfortability to review their gathered data as long as the user has access to the internet and currently logged on to the mobile application. Christopher Albarillo will be leading this section.

### 2.4.2 Connectivity

The mobile application allows the user to graphically control the PiRover via Bluetooth integration to the Raspberry Pi 3. The Android device and Raspberry Pi 3 should be paired in order to control the PiRover. For further details refer to the Mobile application’s “Help” section.

## 2.5 External Interface Requirements

In order to run the android application, an Android device that is above API 21 (Android 5.0) is required. Any device under this API will not be able to run the application. For the voice

activation control, it will require an external microphone as the PI doesn't have an integrated microphone. This can be a USB webcam with a microphone, USB microphone or 3.5mm microphone. To use the 3.5mm microphone, a USB sound card is needed as the PI 3.5mm jack is an output and not an input. The USB ones are plug and play.

## 2.6 System Features

The PiRover has multiple features and still going through multiple updates for further implementations. Up to date features include;

- Full Manual Control of the PiRover
- Automatic Sensor Mode

System Features in the process of being implemented;

- Voice Activation Control System \*Patrick\*
- Lights (May be Voice controlled) \*Chris\*
- Movement (Possibly voice controlled) \*Lawrence\*





## 3 Progress Report

### 3.1 Build Instructions

#### 3.1.1 Mechanical Assembly

- Mount the laser cut chassis all together (use glue gun or tape for stability).
- Screw the micro servos into the side chassis.
- Place the Raspberry Pi on top of the chassis.
- Carefully mount the power bank on top of the Raspberry Pi or the bottom (depending on the size of the powerbank).
- Mount the sensor with its breadboard on the Raspberry Pi (preferably on the USB ports).

#### 3.1.2 Wiring

- Simply follow the System Diagram provided in the Illustration list.
- Follow correct GPIO pins in the diagram provided.
- Refer to the code provided in the Technical References, subheading servo2.py code, for GPIO inputs.

#### 3.1.3 Power Up

Powering up the Raspberry Pi.

- Plug in the powerbank to the Raspberry Pi and turn it on.
- Install/Updated the OS if have not already done so.
- Plug in the Raspberry Pi to any available monitor with an HDMI cable.
- Rasperry Pi Logo will appear and shortly redirect you to the desktop if ran correctly.
- Connect the Raspberry Pi to the internet using an Ethernet cable or WiFi. This allows the user to control/send commands to the Raspberry Pi remotely.





## 4 Conclusion



## 5 Recommendations



## 6 Technical References

### 6.1 servo2.py code

```

import
Rpi.GPIO
as gpio

import time
import sys
import Tkinter as tk
from sensorA import distance
import random
gpio.setmode(gpio.BOARD)
gpio.setup(7, gpio.OUT)
gpio.setup(11, gpio.OUT)
pwm=gpio.PWM(7,50)
pwm2=gpio.PWM(11,50)
pwm2.start(0)
pwm.start(0)
def forward(tf):
    DC=1./18.*(1)+2
    DC2=1./18.*(180)+2
    pwm.ChangeDutyCycle(DC2)
    pwm2.ChangeDutyCycle(DC)
    time.sleep(tf)
    pwm.start(0)
    pwm2.start(0)
def reverse(tf):
    DC=1./18.*(1)+2
    pwm.ChangeDutyCycle(DC)
    DC2=1./18.*(180)+2
    pwm2.ChangeDutyCycle(DC2)
    time.sleep(tf)
    pwm.start(0)
    pwm2.start(0)
def turnLeft(tf):
    #for i in range(0,180):
    DC=1./18.*(1)+2
    pwm.ChangeDutyCycle(DC)
    pwm2.ChangeDutyCycle(DC)
    time.sleep(tf)
    pwm2.start(0)
    pwm.start(0)

```

```

#gpio.cleanup()
def turnRight(tf):
    DC=1/18.*180+2
    pwm.ChangeDutyCycle(DC)
    pwm2.ChangeDutyCycle(DC)
    time.sleep(tf)
    pwm2.start(0)
    pwm.start(0)
#gpio.cleanup()
def key_input(event):
    print 'Key: ', event.char
    key_press = event.char
    s = 0.030
    if key_press.lower()=='w':
        forward(s)
    elif key_press.lower()=='s':
        reverse(s)
    elif key_press.lower()=='a':
        turnLeft(s)
    elif key_press.lower()=='d':
        turnRight(s)
    command = tk.Tk()
    command.bind('<KeyPress>', key_input)
    command.mainloop()

```



## 7 Appendices