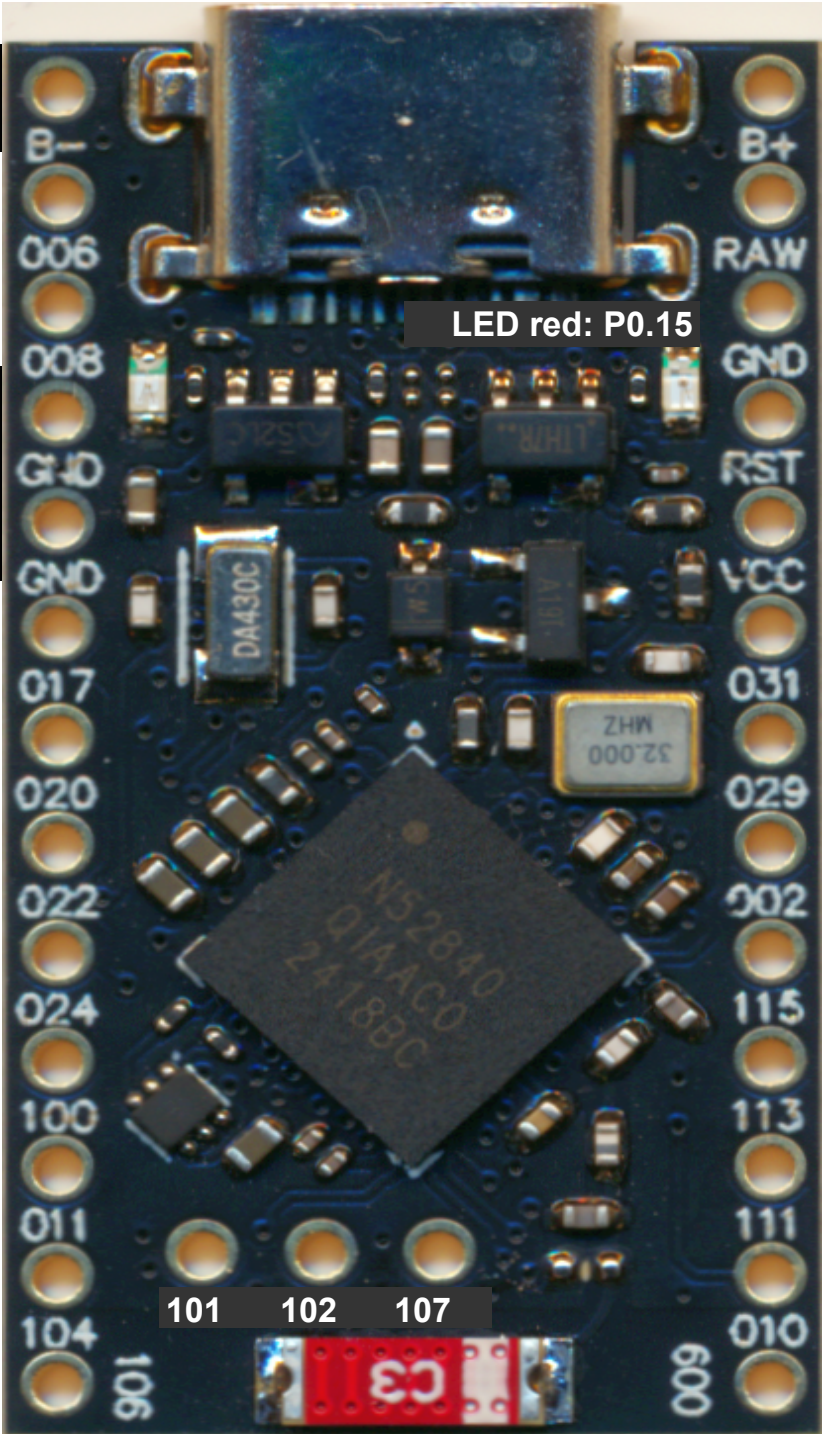


Pinout nRF52840 ProMicro (NiceNano) by Doc Cool (cool-web.de)

IO PM			IO nRF			IO NN			USB			IO NN			IO nRF			IO PM		
UART1 TX UART1 RX	GND	B-											B+	Batt+ (3.7V)	(Charge @100 mA)					
	D1	P0.06	RAW	Batt+ (3.7V)																
	D0	P0.08	GND	GND	RST	Reset (P0.18)														
	GND	GND	VCC	3.3V (OUT)																
D2	P0.17	P0.31	D21	ADC																
D3	P0.20	P0.29	D20	ADC																
D4	P0.22	P0.02	D19	ADC																
D5	P0.24	P1.15	D18	SPI MISO																
D6	P1.00	P1.13	D15	SPI MOSI																
D7	P0.11	P1.11	D14	SPI Clock																
I2C SDA	D8	P1.04	P0.10	D16	NFC															
I2C SCL	D9	P1.06	P0.09	D10	NFC															
			P1.01	P1.02	P1.07															