



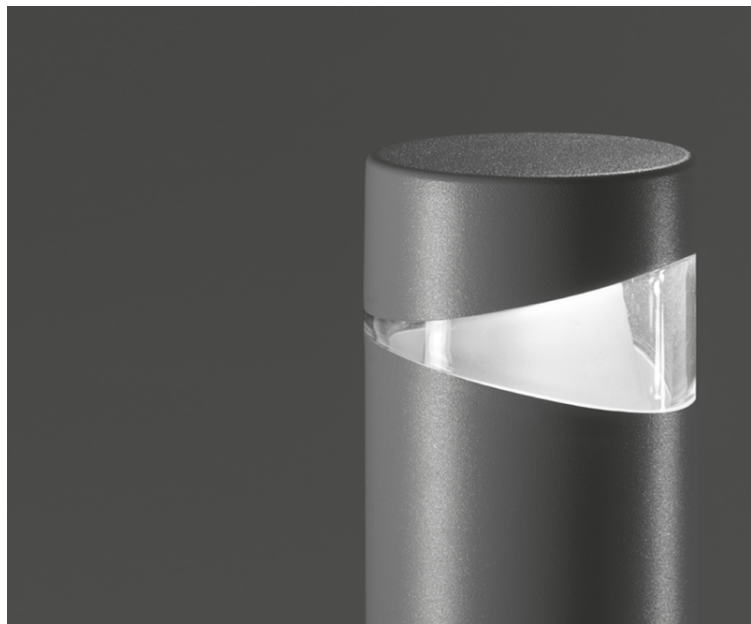

601801.30.HA.02.1

Boulevard Mini 180

600mm height bollard, round shape, for outdoor surface installation, 180° light emission, phosphochromatised and polyester powder coated extruded copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included. Built-in LED driver 220-240V 50-60Hz, with 8 CREE JK3030 mid-power LED. IP65 rating.



Light Source Technical Data

Wattage	6.5W
CCT	3000K
Beam Angle	180°
Lumens	400
Finish	RAL7016
Dimming	1-10V
IP Rating	IP65
IK Rating	IK10
Coating	Polyester powder coating with phosphocromating pre-finish
Light Source	NR. 8 x CREE JK3030 LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Polycarbonate diffuser
Gross Weight	4,00 Kg

Technical Feature



Integrated Accessories

Built-in accessories to be requested when ordering

example 601801.30.HA.02.1.HC

601801.30.HA.02.1. _ _



.00

NO ACCESSORY

No accessory

Gallery

