



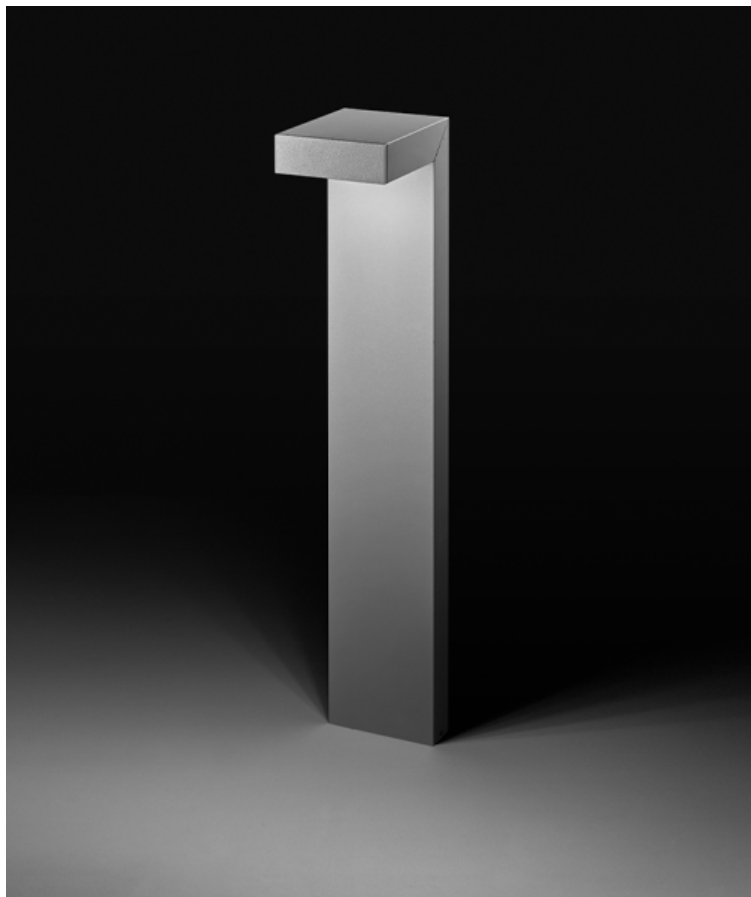

601606.30.AS.02.D

Periscope 03

750mm height "L-shape" bollard, for outdoor installation, one-side downward asymmetrical light distribution, phospho-chromatised and polyester powder coated extruded aluminum body. Tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with CREE "XP-G2" LED. IP65 rating.



Light Source Technical Data

Wattage	14W
CCT	3000K
Beam Angle	generic asymmetric
Lumens	1610
Finish	RAL7016
Dimming	DALI
IP Rating	IP65
IK Rating	IK10
Coating	Polyester powder coating with phosphocromating pre-finish
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable Gland	M16 rubber grommet
Power Cable	0,5 mt. neoprene power cable included
Gross Weight	5,50 Kg

Technical Feature



Integrated Accessories

Built-in accessories to be requested when ordering

example 601606.30.AS.02.D.HC

601606.30.AS.02.D. _ _



.00

NO ACCESSORY

No accessory

Gallery

