



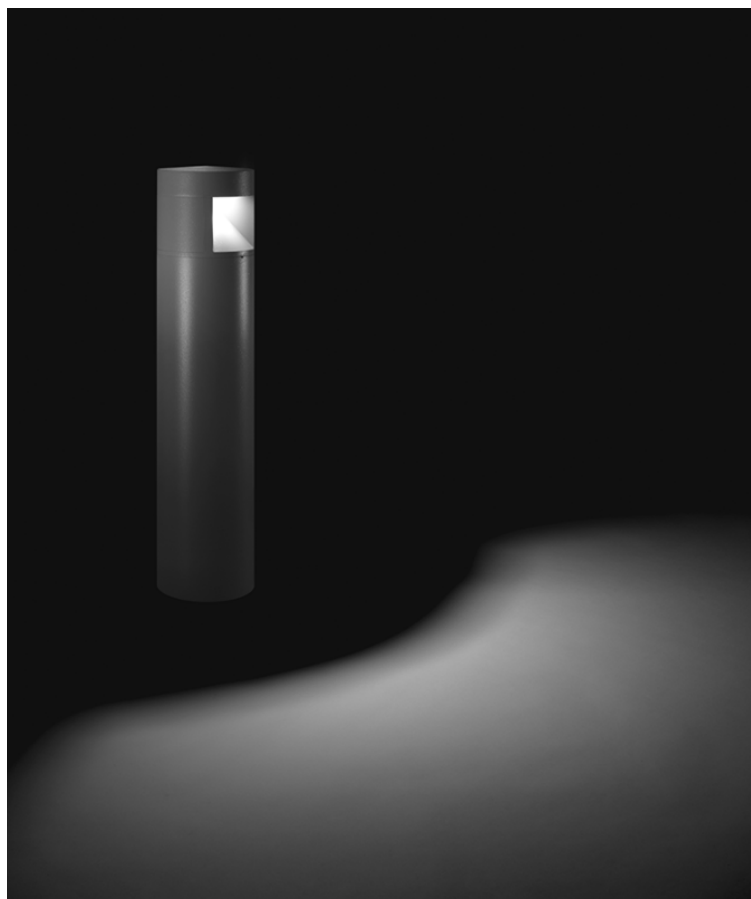

601705.40.90.03.D

## Sector 650 01

650mm height bollard, round shape, for outdoor surface installation, from 1 to 4 light window, phospho-chromatised and polyester powder coated extruded copper-free aluminium body, opaline tempered glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with NR. 1 x CREE LED. IP66 rating.



## Light Source Technical Data

|                     |                                                           |
|---------------------|-----------------------------------------------------------|
| <b>Wattage</b>      | 6W                                                        |
| <b>CCT</b>          | 4000K                                                     |
| <b>Beam Angle</b>   | 90°                                                       |
| <b>Lumens</b>       | 550                                                       |
| <b>Finish</b>       | Matt Black                                                |
| <b>Dimming</b>      | DALI                                                      |
| <b>IP Rating</b>    | IP66                                                      |
| <b>IK Rating</b>    | IK10                                                      |
| <b>Coating</b>      | Polyester powder coating with phosphocromating pre-finish |
| <b>Light Source</b> | NR. 1 x CREE LED                                          |
| <b>Screws</b>       | Stainless steel                                           |
| <b>Transformer</b>  | Electrical power supply 220/240V 50/60Hz built-in         |
| <b>Gasket</b>       | Silicone rubber                                           |
| <b>Glass</b>        | Tempered                                                  |
| <b>Power Cable</b>  | 1 meter included                                          |
| <b>Gross Weight</b> | 6,00 Kg                                                   |

## Technical Feature



## Integrated Accessories

Built-in accessories to be requested when ordering

example 601705.40.90.03.D.HC

601705.40.90.03.D. \_ \_



.00

NO ACCESSORY

No accessory

## Accessories not included

Accessories to be ordered separately



AC053

BASE PLATE

## Gallery

