


## DELTA 7W RECESSED FIX DEEP



Recessed Downlight  
5W-7W  
Lifetime up to 100.000h  
Ripple <1%  
2 MacAdam step

Input Voltage: AC 220-240V  
Power Factor: 0.95  
CCT:2700K-3000K-4000K, Tunable White, Dim to Warm  
CRI: 90 (F90 series) & 98 optionally  
Color tolerance: 2 MacAdam  
Material Aluminum-PC(dark cover)  
Electronic short-circuit protection  
Overload protection  
Overtemperature protection  
Protection against "no load" operation  
Operation temperature: -25° +45°  
Operation lifetime 100.000h  
7 years warranty  
L90B10 @ 50.000h

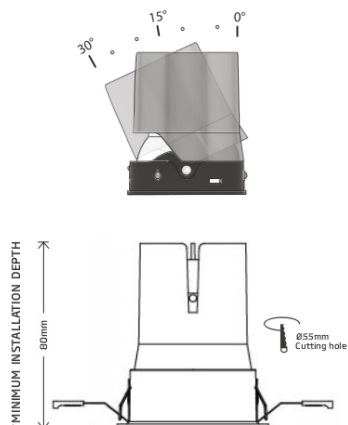

Your description code is

|      |    |   |    |   |   |   |
|------|----|---|----|---|---|---|
| DRFD | 07 | 9 | 11 | O | C | W |
|------|----|---|----|---|---|---|

Type of luminate

|                            |              |
|----------------------------|--------------|
| DELTA 7W RECESSED FIX DEEP | DRFD07911OCW |
|----------------------------|--------------|

Specifications

|                         |                            |
|-------------------------|----------------------------|
| WATTAGE                 | 7                          |
| CRI                     | 90                         |
| CCT                     | TUNNABLE WHITE 2700K-6500K |
| OPTIC/DIFFUSER          | 24°                        |
| DRIVER                  | PHASE CUT                  |
| COVER COLOUR            | WHITE                      |
| LED MODULE LUMEN OUTPUT | 1197                       |
| LUMINAIRE LUMEN OUTPUT  | 771                        |
| UGR VALUE 70/50/20      | 15                         |