




FL112/DX.48V G5 19W T950

White LED strips

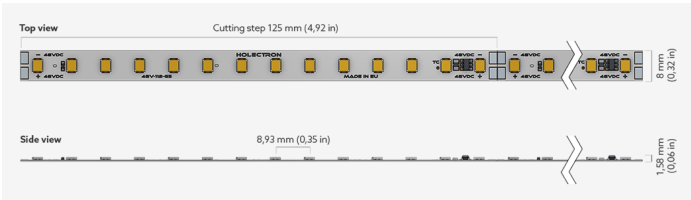

|                   |                                          |
|-------------------|------------------------------------------|
| LIGHT TYPE        | White                                    |
| LED Qty           | 112 LEDs/m                               |
| CCT               | 5000K                                    |
| CRI               | CRI90                                    |
| COLOR CONSISTENCY | 3-Step MacAdam                           |
| PHOTOMETRIC       | 120° beam angle                          |
| LUMINOUS FLUX     | 2699 Lm/m (823 Lm/ft)                    |
| EFFICACY          | 141 Lm/W                                 |
| LIFETIME          | L70B10 > 50.000h                         |
| CONTROL           | Dimmable                                 |
| VOLTAGE           | 48 VDC                                   |
| WATTAGE           | 19.2 W/m (5.85 W/ft)                     |
| CUTTING STEP      | 12,5 cm (4,92 in)                        |
| MAX RUN           | 11 m (36.1 ft)                           |
| PACKING           | 10 m, 50 m or customized length per reel |
| DIMENSIONS        | Width: 8mm; Height: 1.58mm               |
| TEMPERATURE       | Tc max 75°C ( 167°F )                    |
| OPERATING TEMP.   | -25°C...+50°C ( -13°F...122°F )          |
| STORAGE TEMP.     | -25°C...+80°C ( -13°F...176°F )          |

CE

ETL

MADE IN EUROPE

5 YEAR WARRANTY

3 STEP MACADAM

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.