





FL112S/NX G5 14W T927

White LED strips

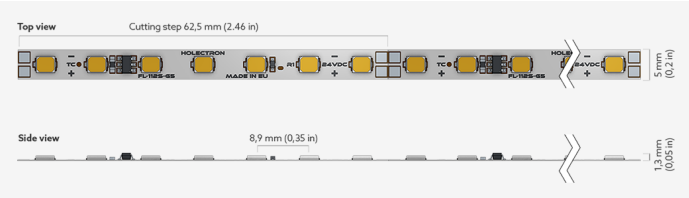

|                   |                       |
|-------------------|-----------------------|
| LIGHT TYPE        | White                 |
| LED Qty           | 112 LEDs/m            |
| CCT               | 2700K                 |
| CRI               | CRI90                 |
| COLOR CONSISTENCY | 3-Step MacAdam        |
| PHOTOMETRIC       | 120° beam angle       |
| LUMINOUS FLUX     | 2065 Lm/m (629 Lm/ft) |
| EFFICACY          | 143 Lm/W              |
| LIFETIME          | L90B10 > 60.000h      |

|         |          |
|---------|----------|
| CONTROL | Dimmable |
|---------|----------|

|         |                      |
|---------|----------------------|
| VOLTAGE | 24 VDC               |
| WATTAGE | 14.4 W/m (4.39 W/ft) |

|              |                                          |
|--------------|------------------------------------------|
| CUTTING STEP | 6,25 cm (2,46 in)                        |
| MAX RUN      | 7 m (23 ft)                              |
| PACKING      | 10 m, 50 m or customized length per reel |
| DIMENSIONS   | Width: 5mm; Height: 1.33mm               |

|                 |                                 |
|-----------------|---------------------------------|
| TEMPERATURE     | Tc max 75°C ( 167°F )           |
| OPERATING TEMP. | -25°C...+50°C ( -13°F...122°F ) |
| STORAGE TEMP.   | -25°C...+80°C ( -13°F...176°F ) |

MADE IN EUROPE5 YEAR WARRANTY3 STEP MACADAM

Possible allowed deviation of optical and electrical values are ±15%. Allowed measurement uncertainty ±7%.  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.