




Inground Radius - R1000

Outdoor

IngroundR S EOP H100 R1000 L0387 / PXL.RGBW96/Bx G5 26W RGBW\_RGBW\_ / OR.T1x

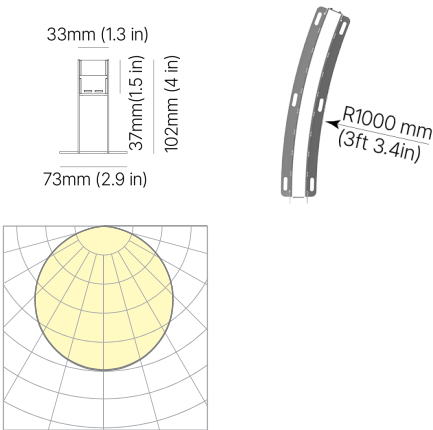

|                 |                                                                                                                                       |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------|
| LUMINOUS FLUX   | Luminaire: 386 Lm ( R: 45, G: 181, B: 20, W: 141 Lm )<br>Light Source: 840 Lm ( R: 97, G: 394, B: 43, W: 307 Lm )                     |
| EFFICACY        | Luminaire: 39 Lm/W<br>Light Source: 86 Lm/W                                                                                           |
| LIFETIME        | L70B10 > 50.000h                                                                                                                      |
| VOLTAGE         | 24VDC                                                                                                                                 |
| LUMINAIRE POWER | 9.7875 W                                                                                                                              |
| CONTROL         | SPI                                                                                                                                   |
| COVER           | Opal Encapsulation ( EOP )                                                                                                            |
| HOUSING         | Stainless Steel ( Marine Grande 316L )                                                                                                |
| IP CLASS        | IP67                                                                                                                                  |
| IK RATE         | IK10                                                                                                                                  |
| DIMENSIONS      | Height: 102 mm ( 4 in )<br>Radius: R1000 mm<br>Length: L0387 mm<br>Width: 33 mm ( 1,3 in ) Light Area<br>Width: 73 mm ( 2,9 in ) Base |
| SEGMENT         | Start<br>Endcaps at the start only<br>Input connector and output wire                                                                 |



## Product Code Explanation

---

IngroundR S EOP H100 R1000 L0387 / PXL.RGBW96/Bx G5 26W RGBW\_RGBW\_ / OR.T1x

|                      |                    |                      |
|----------------------|--------------------|----------------------|
| <b>S</b>             | Start              | Segment type         |
| <b>EOP</b>           | Opal Encapsulation | Cover type           |
| <b>H100</b>          | 102 mm             | Height, mm           |
| <b>R1000</b>         | R1000, mm          | Radius, mm           |
| <b>L0387</b>         | L0387, mm          | Length, mm           |
| <b>PXL.RGBW96/Bx</b> | PXL.RGBW96/Bx      | LED strip model      |
| <b>G5</b>            | G5                 | LED strip generation |
| <b>26W</b>           | 26W (rounded)      | Wattage, W/m         |

## Luminous Flux of White Light

White light across the 1800–6500 K CCT range is produced by mixing red, green, blue and white LEDs in varying proportions.

The luminous flux values (lm) shown in the table below refer to the LED light source, not the luminaire. To calculate the luminaire output, multiply the listed values by the light output ratio (LOR) of 0.46:

$$\text{Luminaire output (lm)} = \text{Light source output (lm)} \times 0.46$$



| CCT   | CRI90+  | CRI95+  |
|-------|---------|---------|
| 2200K | 1237 lm | 1218 lm |
| 2700K | 1354 lm | 1338 lm |
| 3000K | 1393 lm | 1374 lm |
| 3500K | 1460 lm | 1448 lm |
| 4000K | 1574 lm | 1554 lm |
| 5000K | 1808 lm | 1780 lm |
| 5700K | 1938 lm | 1896 lm |
| 6500K | 2033 lm | 1968 lm |

LED mixing ratios for achieving various white-light spectra.


| CRI 90+ |         |         |         |         | CRI 95+ |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| CCT     | W ratio | R ratio | G ratio | B ratio | CCT     | W ratio | R ratio | G ratio | B ratio |
| 1800    | 37.59%  | 57.14%  | 5.26%   | 0.00%   |         |         |         |         |         |
| 2200    | 46.62%  | 43.65%  | 9.25%   | 0.49%   | 2200    | 42.67%  | 46.50%  | 10.30%  | 0.53%   |
| 2700    | 51.13%  | 32.03%  | 13.87%  | 2.97%   | 2700    | 46.62%  | 35.41%  | 14.92%  | 3.05%   |
| 3000    | 51.32%  | 27.14%  | 16.69%  | 4.85%   | 3000    | 46.99%  | 30.38%  | 17.82%  | 4.81%   |
| 3500    | 50.56%  | 22.22%  | 19.89%  | 7.33%   | 3500    | 45.86%  | 25.90%  | 20.98%  | 7.26%   |
| 4000    | 48.31%  | 18.23%  | 23.35%  | 10.11%  | 4000    | 43.31%  | 22.18%  | 24.55%  | 9.96%   |
| 5000    | 43.05%  | 13.72%  | 27.97%  | 15.26%  | 5000    | 37.41%  | 18.42%  | 29.25%  | 14.92%  |
| 5700    | 41.54%  | 11.20%  | 29.21%  | 18.05%  | 5700    | 34.77%  | 16.73%  | 30.83%  | 17.67%  |
| 6500    | 38.98%  | 8.98%   | 30.86%  | 21.17%  | 6500    | 30.75%  | 15.98%  | 32.86%  | 20.41%  |

## CRI 95+ CCT 2200K

Spectra





TM-30: 92,5




## CRI 95+ CCT 2700K

Spectra





TM-30: 92,9




## CRI 95+ CCT 3000K

Spectra





TM-30: 92,5




## CRI 95+ CCT 3500K

Spectra





TM-30: 91,9




## CRI 95+ CCT 4000K

Spectra





TM-30: 91,2




## CRI 95+ CCT 5000K

Spectra



TM-30: 91,0



## CRI 95+ CCT 5700K

Spectra



TM-30: 90,6



## CRI 95+ CCT 6500K

Spectra



TM-30: 90,1



## Red

Spectra



TM-30: 0,0



## Green

Spectra






TM-30: 0,0





## Blue

Spectra



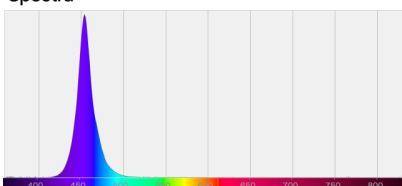


TM-30: 0,0

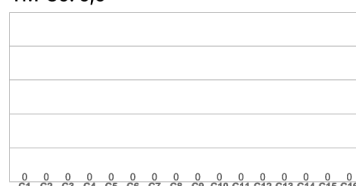

## White

Spectra

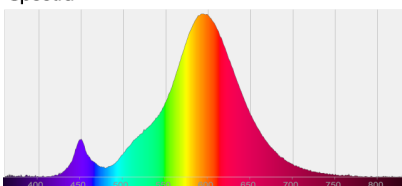

TM-30: 72,4

