




Inground Radius - R0272

Outdoor

IngroundR F EOP H100 R0272 L0404 / RGB48/Nx G5 07W RGB_RGB_ / OR.T1x

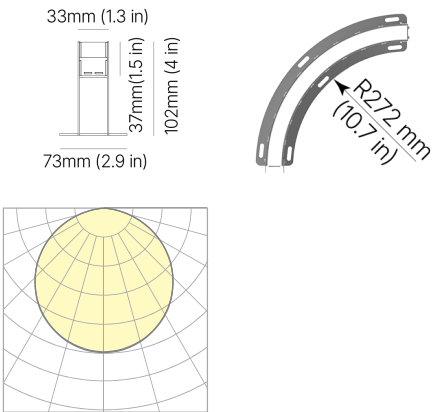


CCT	RGB
CRI	RGB
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	Luminaire: 55 Lm (R: 11, G: 36, B: 7 Lm) Light Source: 119 Lm (R: 24, G: 78, B: 16 Lm)
EFFICACY	Luminaire: 20 Lm/W Light Source: 44 Lm/W
LIFETIME	L90B10 > 60.000h

VOLTAGE	24VDC
LUMINAIRE POWER	2.7 W
CONTROL	Dimmable

COVER	Opal Encapsulation (EOP)
HOUSING	Stainless Steel (Marine Grande 316L)
IP CLASS	IP67
IK RATE	IK10

DIMENSIONS	Height: 102 mm (4 in) Radius: R0272 mm Length: L0404 mm Width: 33 mm (1,3 in) Light Area Width: 73 mm (2,9 in) Base
------------	---

SEGMENT	Full Endcaps on both ends Input connector and output wire
---------	---



Product Code Explanation

IngroundR F EOP H100 R0272 L0404 / RGB48/Nx G5 07W RGB_RGB_ / OR.T1x

F	Full	Segment type
EOP	Opal Encapsulation	Cover type
H100	102 mm	Height, mm
R0272	R0272, mm	Radius, mm
L0404	L0404, mm	Length, mm
RGB48/Nx	RGB48/Nx	LED strip model
G5	G5	LED strip generation
07W	07W (rounded)	Wattage, W/m
RGB_	RGB_	CRI
RGB_	RGB_	CCT

Possible allowed deviation of optical and electrical values are $\pm 15\%$. Allowed measurement uncertainty $\pm 7\%$.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.