


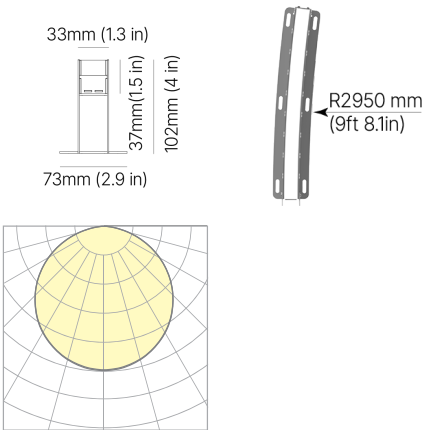

Inground Radius - R2950

Outdoor

IngroundR F EOP H100 R2950 L0384 / RGBW48/NN G5 09W RGB_RGB_T940 / OR.T1x

CCT	RGB + 4000K
CRI	RGB + CRI90 (White)
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	Luminaire: 111 Lm (R: 11, G: 36, B: 7, W: 57 Lm) Light Source: 242 Lm (R: 24, G: 78, B: 16, W: 123 Lm)
EFFICACY	Luminaire: 31 Lm/W Light Source: 67 Lm/W
LIFETIME	L90B10 > 60.000h
VOLTAGE	24VDC
LUMINAIRE POWER	3.6 W
CONTROL	Dimmable
COVER	Opal Encapsulation (EOP)
HOUSING	Stainless Steel (Marine Grande 316L)
IP CLASS	IP67
IK RATE	IK10
DIMENSIONS	Height: 102 mm (4 in) Radius: R2950 mm Length: L0384 mm Width: 33 mm (1,3 in) Light Area Width: 73 mm (2,9 in) Base
SEGMENT	Full Endcaps on both ends Input connector and output wire



Product Code Explanation

IngroundR F EOP H100 R2950 L0384 / RGBW48/NN G5 09W RGB_RGB_T940 / OR.T1x

F	Full	Segment type
EOP	Opal Encapsulation	Cover type
H100	102 mm	Height, mm
R2950	R2950, mm	Radius, mm
L0384	L0384, mm	Length, mm
RGBW48/NN	RGBW48/NN	LED strip model
G5	G5	LED strip generation
09W	09W (rounded)	Wattage, W/m
RGB_	RGB_	LED 1 CRI
RGB_	RGB_	LED 1 CCT
T9	CRI90	LED 2 CRI
40	4000K	LED 2 CCT

Possible allowed deviation of optical and electrical values are $\pm 15\%$. Allowed measurement uncertainty $\pm 7\%$.
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.