



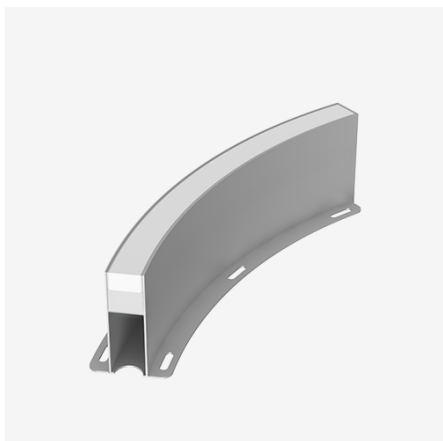

Inground Radius - R0515

Outdoor

IngroundR | EOP H100 R0515 L0393 / RGBW48/NN G5 09W RGB_RGB_T930 / OR.T1x

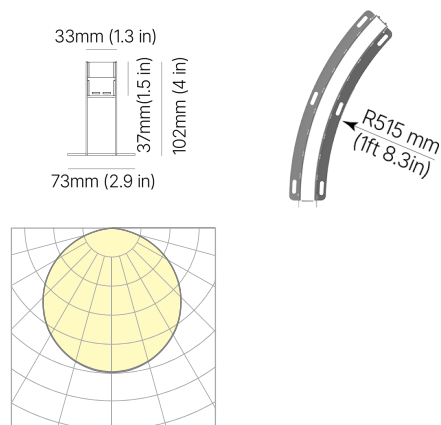


CCT	RGB + 3000K
CRI	RGB + CRI90 (White)
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	Luminaire: 109 Lm (R: 11, G: 36, B: 7, W: 54 Lm) Light Source: 237 Lm (R: 24, G: 78, B: 16, W: 118 Lm)
EFFICACY	Luminaire: 30 Lm/W Light Source: 66 Lm/W
LIFETIME	L90B10 > 60.000h

VOLTAGE	24VDC
LUMINAIRE POWER	3.6 W
CONTROL	Dimmable

COVER	Opal Encapsulation (EOP)
HOUSING	Stainless Steel (Marine Grande 316L)
IP CLASS	IP67
IK RATE	IK10

DIMENSIONS	Height: 102 mm (4 in) Radius: R0515 mm Length: L0393 mm Width: 33 mm (1,3 in) Light Area Width: 73 mm (2,9 in) Base
-------------------	---

SEGMENT	Individual Endcaps on both ends Input connector only, no output wire
----------------	---



Product Code Explanation

IngroundR I EOP H100 R0515 L0393 / RGBW48/NN G5 09W RGB_RGB_T930 / OR.T1x

I	Individual	Segment type
EOP	Opal Encapsulation	Cover type
H100	102 mm	Height, mm
R0515	R0515, mm	Radius, mm
L0393	L0393, mm	Length, mm
RGBW48/NN	RGBW48/NN	LED strip model
G5	G5	LED strip generation
09W	09W (rounded)	Wattage, W/m
RGB_	RGB_	LED 1 CRI
RGB_	RGB_	LED 1 CCT
T9	CRI90	LED 2 CRI
30	3000K	LED 2 CCT