


Inground Radius - R0000

Outdoor

IngroundR | EOP H100 R0000 L0505 / PXL.RGBW96/Bx G5 26W RGBW_RGBW_ / OR.T1x

LUMINOUS FLUX	Luminaire: 515 Lm (R: 59, G: 242, B: 26, W: 188 Lm) Light Source: 1120 Lm (R: 129, G: 525, B: 57, W: 409 Lm)
EFFICACY	Luminaire: 39 Lm/W Light Source: 86 Lm/W
LIFETIME	L70B10 > 50.000h
VOLTAGE	24VDC
LUMINAIRE POWER	13.05 W
CONTROL	SPI
COVER	Opal Encapsulation (EOP)
HOUSING	Stainless Steel (Marine Grande 316L)
IP CLASS	IP67
IK RATE	IK10
DIMENSIONS	Height: 102 mm (4 in) Radius: R0000 mm Length: L0505 mm Width: 33 mm (1,3 in) Light Area Width: 73 mm (2,9 in) Base
SEGMENT	Individual Endcaps on both ends Input connector only, no output wire



Product Code Explanation

IngroundR | EOP H100 R0000 L0505 / PXL.RGBW96/Bx G5 26W RGBW_RGBW_ / OR.T1x

I	Individual	Segment type
EOP	Opal Encapsulation	Cover type
H100	102 mm	Height, mm
R0000	R0000, mm	Radius, mm
L0505	L0505, mm	Length, mm
PXL.RGBW96/Bx	PXL.RGBW96/Bx	LED strip model
G5	G5	LED strip generation
26W	26W (rounded)	Wattage, W/m

Luminous Flux of White Light

White light across the 1800–6500 K CCT range is produced by mixing red, green, blue and white LEDs in varying proportions.

The luminous flux values (lm) shown in the table below refer to the LED light source, not the luminaire. To calculate the luminaire output, multiply the listed values by the light output ratio (LOR) of 0.46:

$$\text{Luminaire output (lm)} = \text{Light source output (lm)} \times 0.46$$




CCT	CRI90+	CRI95+
2200K	1237 lm	1218 lm
2700K	1354 lm	1338 lm
3000K	1393 lm	1374 lm
3500K	1460 lm	1448 lm
4000K	1574 lm	1554 lm
5000K	1808 lm	1780 lm
5700K	1938 lm	1896 lm
6500K	2033 lm	1968 lm

LED mixing ratios for achieving various white-light spectra.



CRI 90+					CRI 95+				
CCT	W ratio	R ratio	G ratio	B ratio	CCT	W ratio	R ratio	G ratio	B ratio
1800	37.59%	57.14%	5.26%	0.00%					
2200	46.62%	43.65%	9.25%	0.49%	2200	42.67%	46.50%	10.30%	0.53%
2700	51.13%	32.03%	13.87%	2.97%	2700	46.62%	35.41%	14.92%	3.05%
3000	51.32%	27.14%	16.69%	4.85%	3000	46.99%	30.38%	17.82%	4.81%
3500	50.56%	22.22%	19.89%	7.33%	3500	45.86%	25.90%	20.98%	7.26%
4000	48.31%	18.23%	23.35%	10.11%	4000	43.31%	22.18%	24.55%	9.96%
5000	43.05%	13.72%	27.97%	15.26%	5000	37.41%	18.42%	29.25%	14.92%
5700	41.54%	11.20%	29.21%	18.05%	5700	34.77%	16.73%	30.83%	17.67%
6500	38.98%	8.98%	30.86%	21.17%	6500	30.75%	15.98%	32.86%	20.41%

CRI 95+ CCT 2200K

Spectra

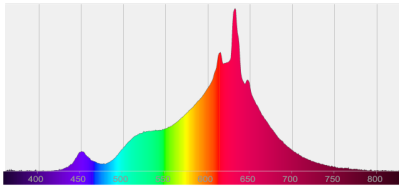

TM-30: 92,5



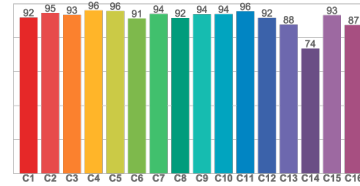


Rf 92.5
Fidelity index Rf



Rg 101.7
Gamut index Rg

CRI 95+ CCT 2700K

Spectra

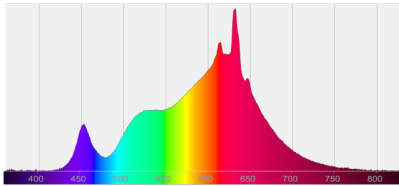

TM-30: 92,9



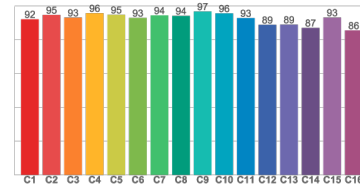


Rf 92.9
Fidelity index Rf



Rg 101.0
Gamut index Rg

CRI 95+ CCT 3000K

Spectra

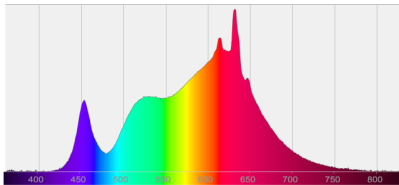

TM-30: 92,5



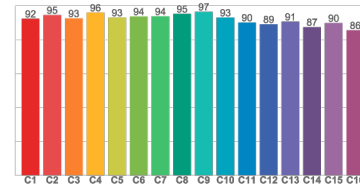


Rf 92.5
Fidelity index Rf



Rg 100.9
Gamut index Rg

CRI 95+ CCT 3500K

Spectra

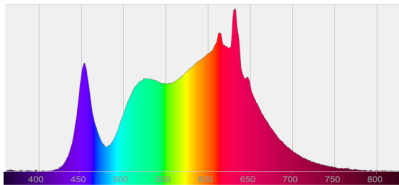

TM-30: 91,9



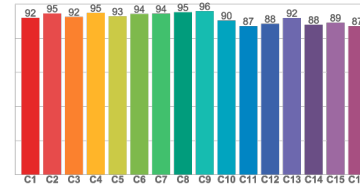


Rf 91.9
Fidelity index Rf



Rg 100.4
Gamut index Rg

CRI 95+ CCT 4000K

Spectra

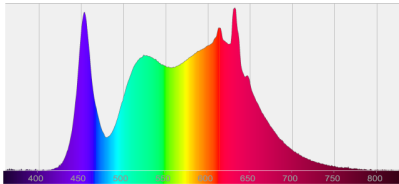

TM-30: 91,2



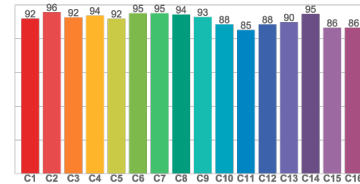


Rf 91.2
Fidelity index Rf



Rg 99.9
Gamut index Rg

CRI 95+ CCT 5000K

Spectra

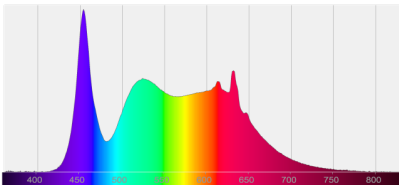

TM-30: 91,0



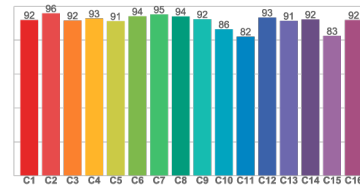


Rf 91.0
Fidelity index Rf



Rg 101.0
Gamut index Rg

CRI 95+ CCT 5700K

Spectra



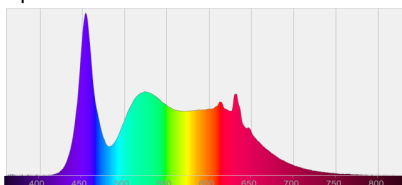


TM-30: 90,6


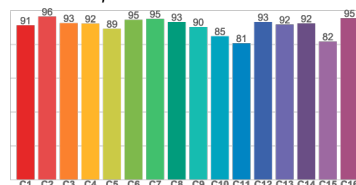


CRI 95+ CCT 6500K

Spectra


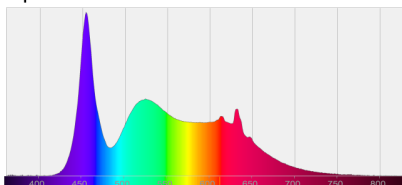


TM-30: 90,1

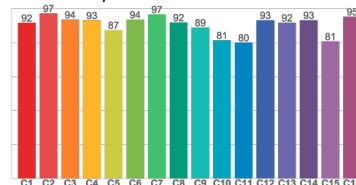


Red

Spectra



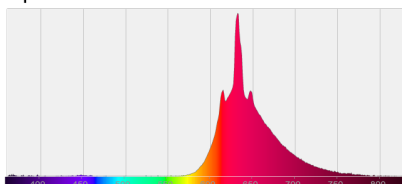


TM-30: 0,0

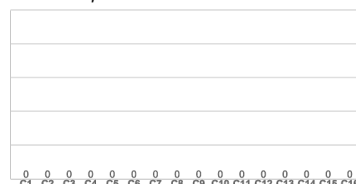


Green

Spectra



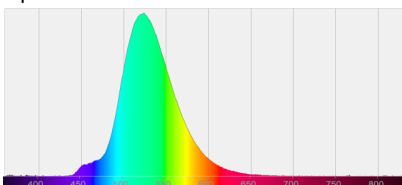


TM-30: 0,0


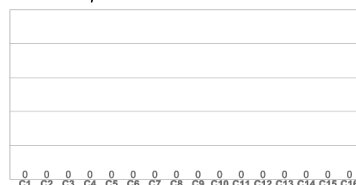


Blue

Spectra



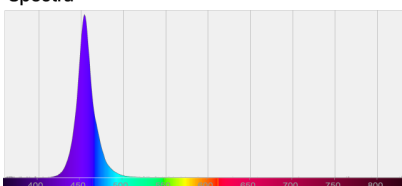


TM-30: 0,0

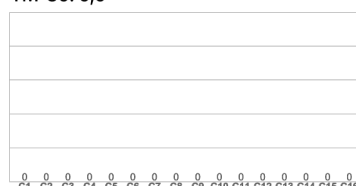

White

Spectra

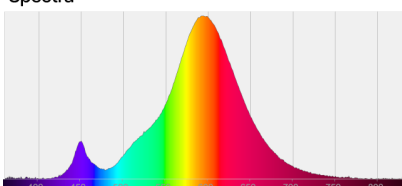

TM-30: 72,4

