



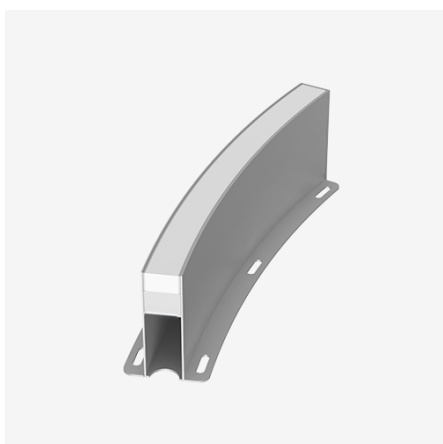

## Inground Radius - R1000

### Outdoor

IngroundR F EOP H100 R1000 L0387 / RGB48/Nx G5 07W RGB\_RGB\_ / OR.T1x

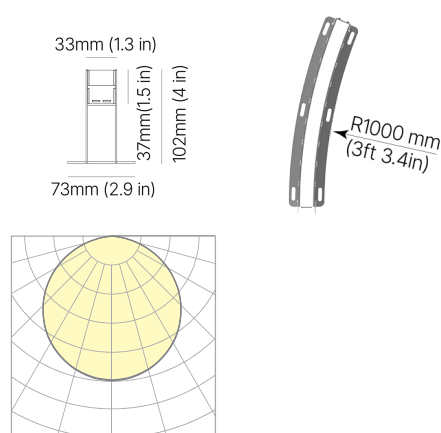

|                          |                                                                                               |
|--------------------------|-----------------------------------------------------------------------------------------------|
| <b>CCT</b>               | RGB                                                                                           |
| <b>CRI</b>               | RGB                                                                                           |
| <b>COLOR CONSISTENCY</b> | 3-Step MacAdam                                                                                |
| <b>LUMINOUS FLUX</b>     | Luminaire: 55 Lm ( R: 11, G: 36, B: 7 Lm )<br>Light Source: 119 Lm ( R: 24, G: 78, B: 16 Lm ) |
| <b>EFFICACY</b>          | Luminaire: 20 Lm/W<br>Light Source: 44 Lm/W                                                   |
| <b>LIFETIME</b>          | L90B10 > 60.000h                                                                              |

|                        |          |
|------------------------|----------|
| <b>VOLTAGE</b>         | 24VDC    |
| <b>LUMINAIRE POWER</b> | 2.7 W    |
| <b>CONTROL</b>         | Dimmable |

|                 |                                       |
|-----------------|---------------------------------------|
| <b>COVER</b>    | Opal Encapsulation ( EOP )            |
| <b>HOUSING</b>  | Stainless Steel ( Marine Grade 316L ) |
| <b>IP CLASS</b> | IP67                                  |
| <b>IK RATE</b>  | IK10                                  |

|                   |                                                                                                                                       |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>DIMENSIONS</b> | Height: 102 mm ( 4 in )<br>Radius: R1000 mm<br>Length: L0387 mm<br>Width: 33 mm ( 1,3 in ) Light Area<br>Width: 73 mm ( 2,9 in ) Base |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------|

|                |                                                                        |
|----------------|------------------------------------------------------------------------|
| <b>SEGMENT</b> | <b>Full</b><br>Endcaps on both ends<br>Input connector and output wire |
|----------------|------------------------------------------------------------------------|



# Product Code Explanation

---

IngroundR F EOP H100 R1000 L0387 / RGB48/Nx G5 07W RGB\_RGB\_ / OR.T1x

|          |                    |                      |
|----------|--------------------|----------------------|
| F        | Full               | Segment type         |
| EOP      | Opal Encapsulation | Cover type           |
| H100     | 102 mm             | Height, mm           |
| R1000    | R1000, mm          | Radius, mm           |
| L0387    | L0387, mm          | Length, mm           |
| RGB48/Nx | RGB48/Nx           | LED strip model      |
| G5       | G5                 | LED strip generation |
| 07W      | 07W (rounded)      | Wattage, W/m         |
| RGB_     | RGB_               | CRI                  |
| RGB_     | RGB_               | CCT                  |

Possible allowed deviation of optical and electrical values are  $\pm 15\%$ . Allowed measurement uncertainty  $\pm 7\%$ .  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.