


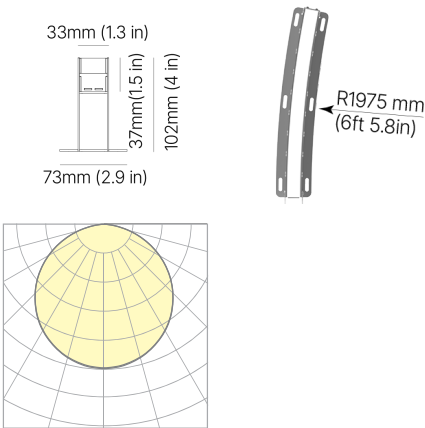

Inground Radius - R1975

Outdoor

IngroundR E EOP H100 R1975 L0385 / RGBW48/NN G5 09W RGB\_RGB\_T927 / OR.T1x

|                   |                                                                                                                                       |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| CCT               | RGB + 2700K                                                                                                                           |
| CRI               | RGB + CRI90 (White)                                                                                                                   |
| COLOR CONSISTENCY | 3-Step MacAdam                                                                                                                        |
| LUMINOUS FLUX     | Luminaire: 106 Lm ( R: 11, G: 36, B: 7, W: 52 Lm )<br>Light Source: 231 Lm ( R: 24, G: 78, B: 16, W: 113 Lm )                         |
| EFFICACY          | Luminaire: 29 Lm/W<br>Light Source: 64 Lm/W                                                                                           |
| LIFETIME          | L90B10 > 60.000h                                                                                                                      |
| VOLTAGE           | 24VDC                                                                                                                                 |
| LUMINAIRE POWER   | 3.6 W                                                                                                                                 |
| CONTROL           | Dimmable                                                                                                                              |
| COVER             | Opal Encapsulation ( EOP )                                                                                                            |
| HOUSING           | Stainless Steel ( Marine Grande 316L )                                                                                                |
| IP CLASS          | IP67                                                                                                                                  |
| IK RATE           | IK10                                                                                                                                  |
| DIMENSIONS        | Height: 102 mm ( 4 in )<br>Radius: R1975 mm<br>Length: L0385 mm<br>Width: 33 mm ( 1,3 in ) Light Area<br>Width: 73 mm ( 2,9 in ) Base |
| SEGMENT           | End<br>Endcap at the end only<br>Input connector only, no output wire                                                                 |



# Product Code Explanation

---

IngroundR E EOP H100 R1975 L0385 / RGBW48/NN G5 09W RGB\_RGB\_T927 / OR.T1x

|           |                    |                      |
|-----------|--------------------|----------------------|
| E         | End                | Segment type         |
| EOP       | Opal Encapsulation | Cover type           |
| H100      | 102 mm             | Height, mm           |
| R1975     | R1975, mm          | Radius, mm           |
| L0385     | L0385, mm          | Length, mm           |
| RGBW48/NN | RGBW48/NN          | LED strip model      |
| G5        | G5                 | LED strip generation |
| 09W       | 09W (rounded)      | Wattage, W/m         |
| RGB_      | RGB_               | LED 1 CRI            |
| RGB_      | RGB_               | LED 1 CCT            |
| T9        | CRI90              | LED 2 CRI            |
| 27        | 2700K              | LED 2 CCT            |

Possible allowed deviation of optical and electrical values are  $\pm 15\%$ . Allowed measurement uncertainty  $\pm 7\%$ .  
All values in datasheet are for reference only and customers should take these values on their own risk. HOLECTRON reserves the right for changes without prior notice.