



- Linibox W is a outdoor luminaire suitable for wall fixed installation.
- It is available in 3 different dimensions.
- Power supply cable required: $3 \times 0,75 \text{ mm}^2$ with maximum external diameter 7mm.
- It is available in black, white and brown colour as standard but RAL colours are also available upon request.
- Dimming options for 8.4W & 12.7W: Without Driver, Phase Cut Dimmable, Non-Dimmable, 24VDC or 48VDC PWM Dimmable.
- Dimming options for 16.8W: Without Driver, Phase Cut Dimmable, Non-Dimmable or 48VDC PWM Dimmable.
- Glare Rating: UGR <13.7 (17°), <13.1 (21°), <12.5 (25°), <20.6 (35°), <23.6 (62°), <15.7 (16°x30°)
- Ingress Protection: IP65
- IK06

L90/B10 >50.000h

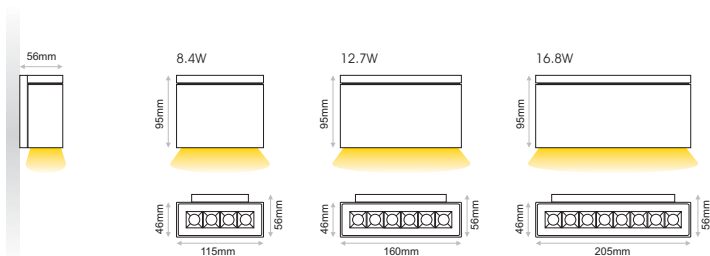

Fixed



Model	LED Power	CCT	CRI80, CRI90 LED Source	Type	Beam Angle	Colour	Dimming Option
LINIBOX W (LINIBOX W)	8.4W (08)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	80 (80)	Fixed (FX)	17° 21° 25° 35° 62° 16°x30°	Black (BL) White (WH) Brown (BR)	Without Driver (00)
			90 (90)				230VAC Non-Dimmable (230ND)
			1060lm				230VAC Phase Cut Dimmable* (230D)
			1120lm				24VDC PWM Dimmable (24D)
			1180lm				48VDC PWM Dimmable (48D)
	12.7W (13)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	1590lm				
			1290lm				
			1680lm				
			1470lm				
			1770lm				
	16.8W (17)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	2120lm				Without Driver (00)
			1720lm				230VAC Non-Dimmable (230ND)
			2240lm				230VAC Phase Cut Dimmable* (230D)
			1960lm				24VDC PWM Dimmable (24D)
			2360lm				48VDC PWM Dimmable (48D)

* By trailing edge dimmers.

Ordering Code Example: LINIBOX W-13-30C-80-FX-MD-WH-ND



8.4W



12.7W



16.8W

