




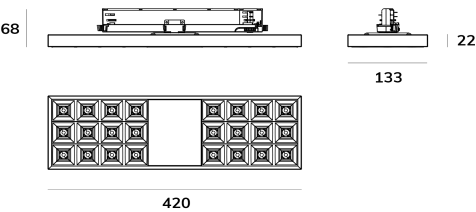

General Dimensions



Photometrics

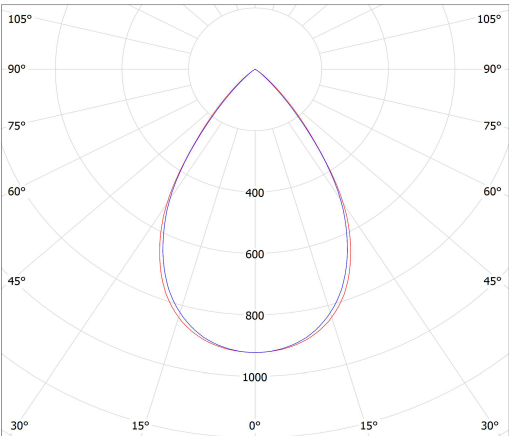

Light Colour	3000K	Mounting	Three-phase rail
Power (W)	24W	Optic	60°
CRI	80	Dimming	DALI
Insulation Class	Class II	IK Rating	IK03
IP Rating	IP20	Lumen (Lm)	3004LM
Size (mm)	420x133x68	Power Input	230V AC 50Hz
Diffuser/ Reflector	PMMA lens	UGR	<19
Weight (kg)	1,180kg		

GENERAL DESCRIPTION

FUSION is equipment for three-phase track designed for work areas. It guarantees flexibility in installation, both in the number of stations and their location in space, which can be changed at any time. The use of DARKLIGHT optics, where the light source is practically invisible from any angle, reduces glare, creating a comfortable environment for the user.

TECHNICAL DESCRIPTION

Three-phase rail luminaire with the dimensions 420x133x68mm. Body in electrostatically colored thermo-lacquered aluminum, the light output is constituted by PMMA lens with anti-glare reflector. The high quality, highly durable light source has an estimated lifetime of 100,000 hours at L80B10 for a Ta=25°C (according to IESNA LM 80-08 and TM 21-11) and a color stability of 3 SCDM for a color temperature of 3000K and an IRC greater than 80%, with an optic of 60° degrees. It thus allows a flow of 3004lm, associated with a consumption of 24W, with the luminaire having an overall efficiency of 125lm/W. In terms of safety, this is an insulation class II, IP20 and IK03 luminaire. The luminaire has a total weight of 1,180kg. This device allows dimming via DALI.

Mounting

Three-phase rail mounting luminaire.

INSTALLATION

Three-phase rail mounting luminaire. The dimensions of the device are 420x133x68mm. You should consult the equipment installation manual. The light source contained in this luminaire must only be replaced by the manufacturer, or its service agent, or a similarly qualified person.

COLOR

STANDARD: 01 : cotton - ral 9003; 04: black crown - ral 9011

INTENDED USE

Luminaire for indoor use.