


FIT FORWARD GEAR ATTACHMENTS



FWD

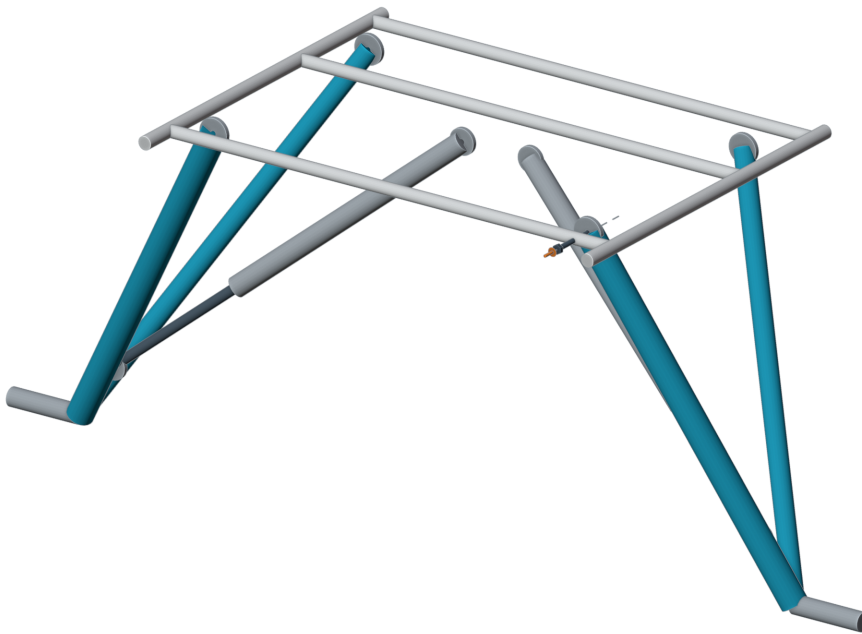


SUPPORTED ASSEMBLY · ALIGNMENT NOT SET

FASTENER AXES SHOWN · INVENTORY IS NOT STACK ORDER

HARDWARE


	2×	AN6-26
	4×	AN960-616
	2×	AN310-6
	2×	MS24665-283

CONNECTION DETAIL

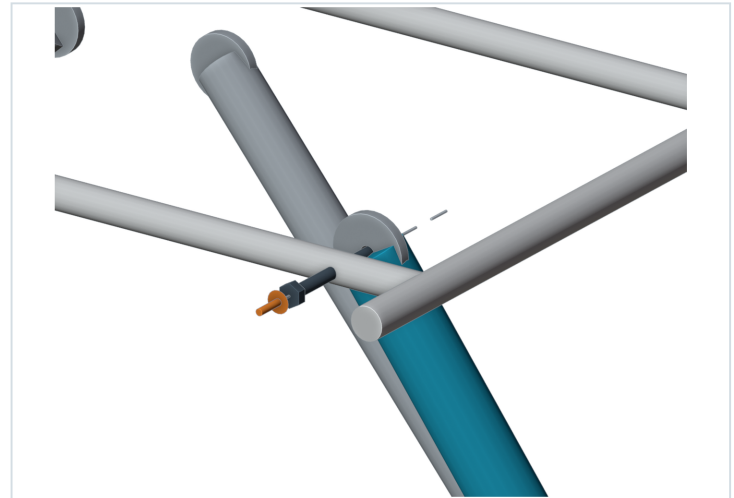

AIRFRAME SUPPORTED · BOTH LEGS

FIT REAR GEAR ATTACHMENTS

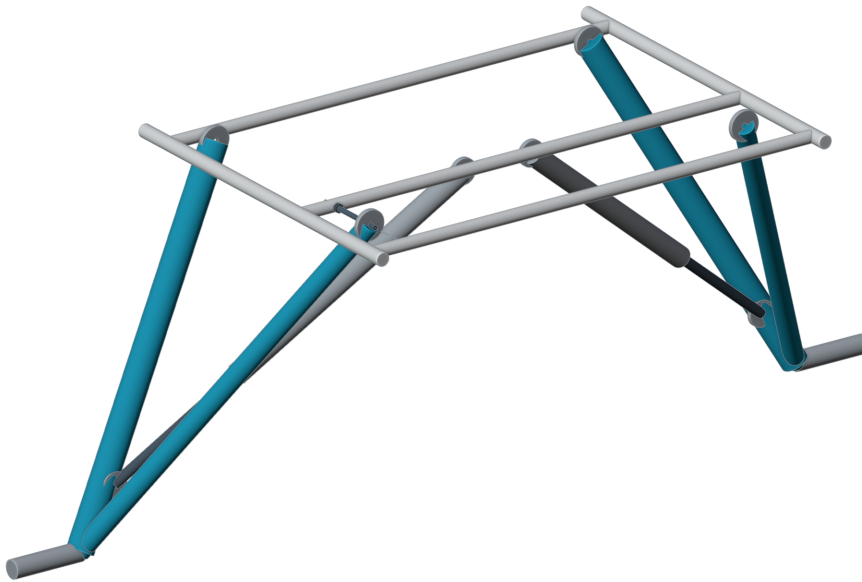

FWD




SUPPORTED ASSEMBLY · ALIGNMENT NOT SET

FASTENER AXES SHOWN · INVENTORY IS NOT STACK ORDER

HARDWARE

	2×	AN6-25
	4×	AN960-616
	2×	AN310-6
	2×	MS24665-283


CONNECTION DETAIL

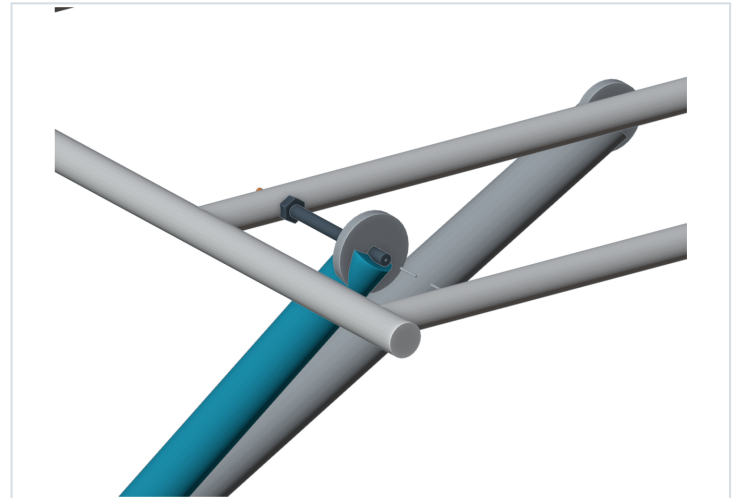

KEEP AIRFRAME SUPPORTED

? VERIFY WASHER POSITION

CHECK LOADED GEAR SPREAD

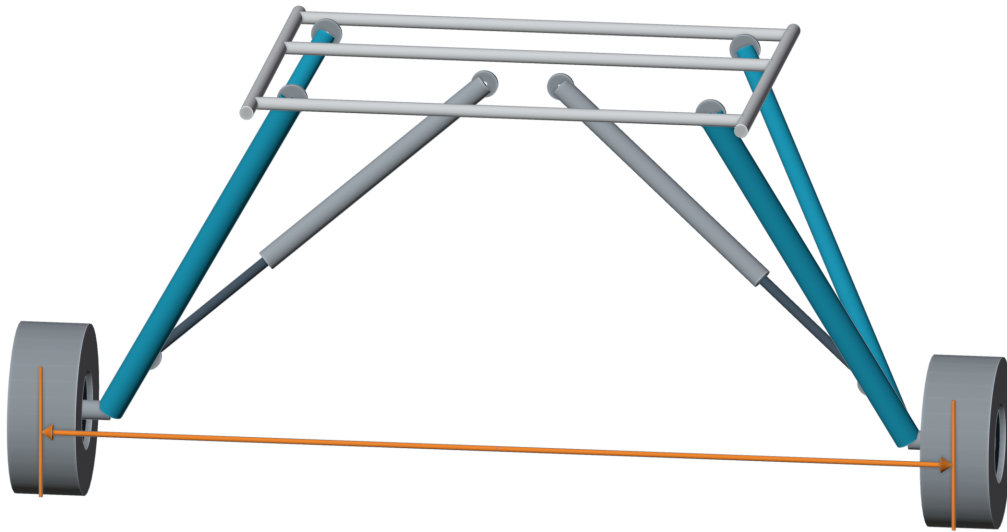

FWD



TIRE CENTER TO TIRE CENTER · AT THEIR FRONTS


ASSEMBLY CHECK

ROLL STRAIGHT AT LEAST 25 ft

72 in AT FLYING WEIGHT

74 in MAXIMUM STATIC SPREAD

TIRE CENTERLINE / FRONT MEASUREMENT

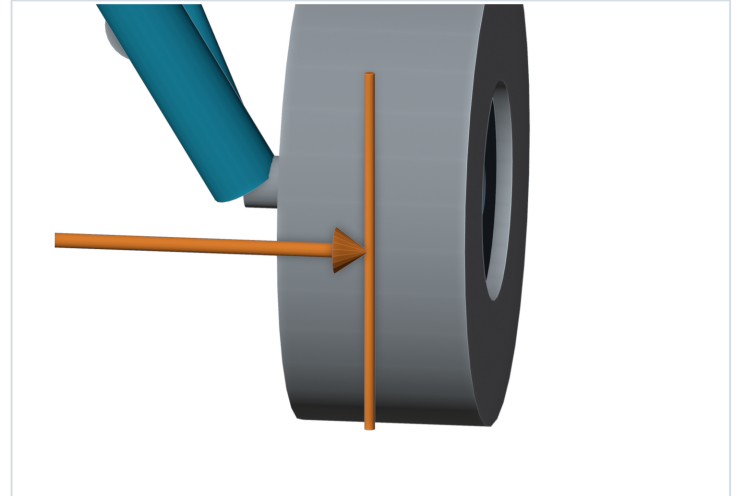

OA-001 · MEASURE AT FRONT OF TIRES

RECORD LOAD AND MEASUREMENT