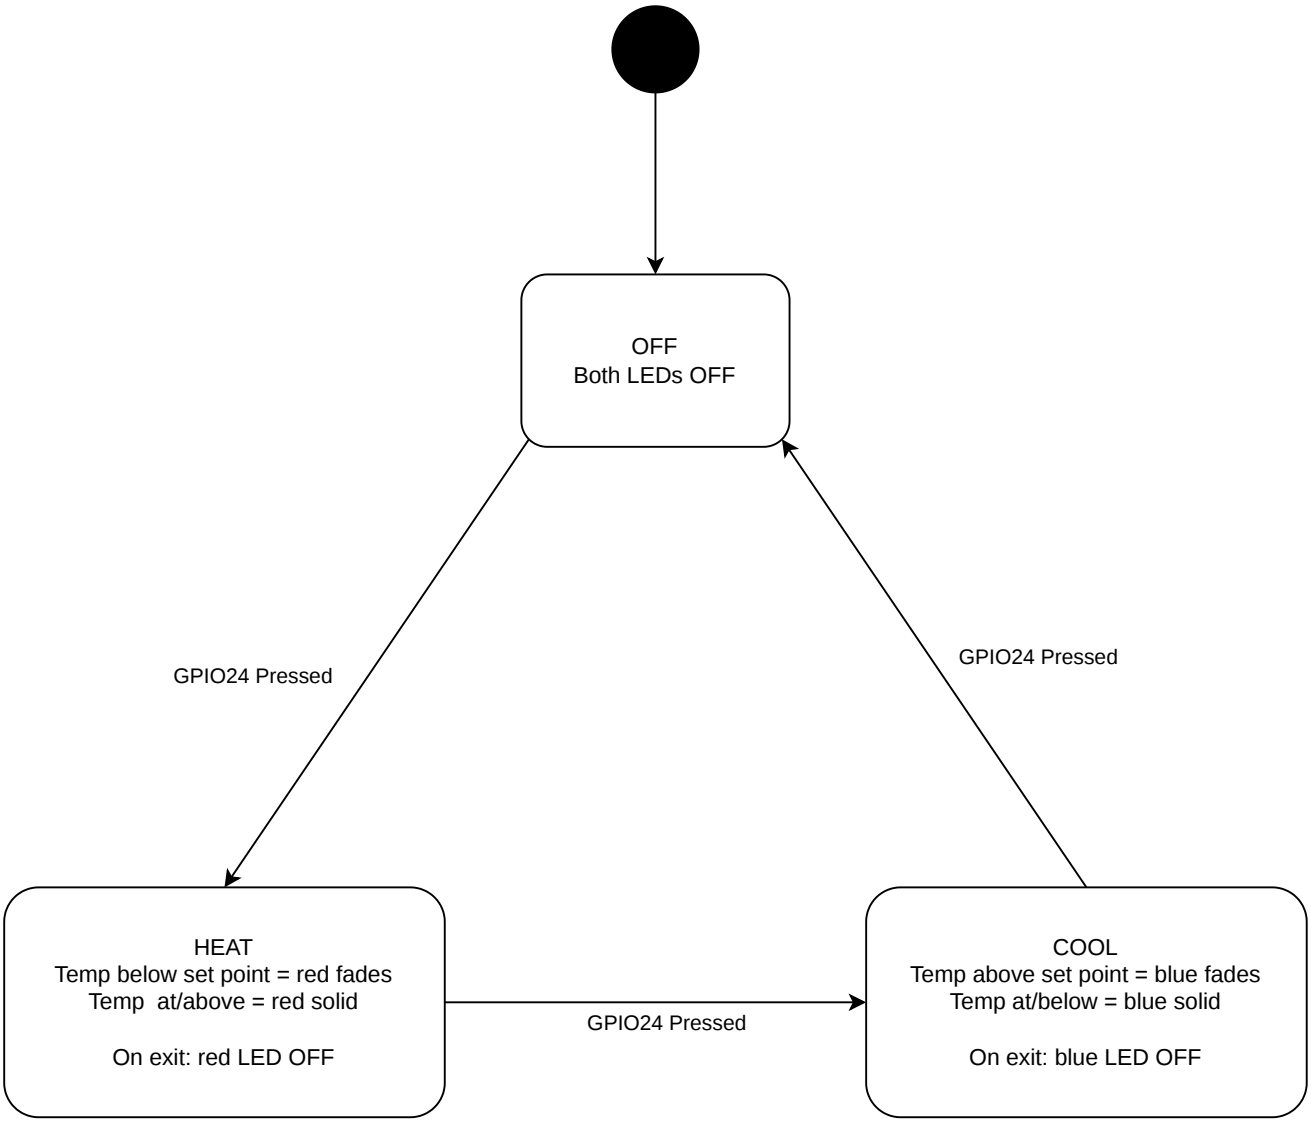

Buttons / Set Point
Red (GPIO25): increase by 1°F
Blue (GPIO12): decrease by 1°F
Default set point: 72°F
LED logic updates after each change

Running in every state
AHT20 reads room temperature over I2C
LCD: date/time; alternates temp and mode/set point
UART: state, temp, set point every 30 seconds
LED logic also refreshes every 10 seconds