

Setup Sheet for Program 1001

▼ Summary

Program comment: Number of operations: 2

Design document: 2

arm v4

Number of tools: 2

Product version:

Tools: T4 T8

Fusion CAM 2601.0.90

Maximum Z: 15 mm

Created:

Minimum Z: -3 mm

15/4/2025 11:31:37 am

Number of setups: 1


Maximum feedrate: 1000 mm/min

Maximum spindle speed: 5000 rpm

Cutting distance: 68896.051 mm

Rapid distance: 46459.262 mm

Estimated cycle time: 1h 14m 45s

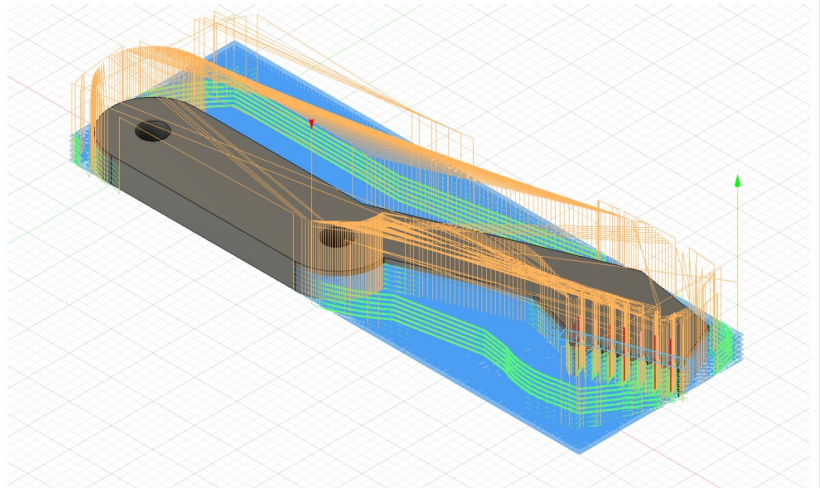

▼ Tools

Number: 4

Diameter offset: 4

Length offset: 4

Tool type: flat end mill

Diameter: 0.2 mm

Length: 24 mm

Number of flutes: 4

Tool product:

Minimum Z: -3 mm

Maximum feedrate:

1000 mm/min

Maximum spindle speed:

5000 rpm

Cutting distance:

68431.238 mm

Rapid distance:

46431.263 mm

Estimated cycle time:

1h 14m 17s

Holder description:

CT40 - 0.125 x 1.38 End Mill


Holder

Holder vendor:

Lyndex-Nikken

Holder product:

C40S6-0125



Number: 8

Diameter offset: 8

Length offset: 8

Tool type: flat end mill

Diameter: 0.01 mm

Length: 24 mm

Number of flutes: 4

Tool product:

Minimum Z: -3 mm

Maximum feedrate:

1000 mm/min

Maximum spindle speed:

5000 rpm

Cutting distance:

464.813 mm

Rapid distance: 27.999 mm

Estimated cycle time: 29s

Holder description:


CT40 - 0.1875 x 4.00 End

Mill Holder

Holder vendor: Lyndex

Holder product:

C4016-0187



▼ Setup

Description: Setup5

WCS: 0

Stock:

x: 60.999 mm

y: 19.766 mm

z: 3 mm

Part:

x: 60.999 mm

y: 19.766 mm

z: 3 mm

Stock lower:

x: 0 mm

y: 0 mm

z: -3 mm

Stock upper:

x: 60.999 mm

y: 19.766 mm

z: 0 mm

▼ Operations

WCS #0

Operation 1/2

Description: 2D Contour1

Strategy: Contour 2D

WCS: 0

Tolerance: 0.01 mm

Stock to leave: 0 mm

Maximum stepdown:

12 mm

Maximum stepover: 0.1 mm

Maximum Z: 15 mm

Minimum Z: -3 mm

Maximum spindle speed:

5000 rpm

Maximum feedrate:

1000 mm/min

Cutting distance:

464.813 mm

Rapid distance: 27.999 mm

Estimated cycle time: 29s

Coolant: Flood

Number: 8

Diameter offset: 8

Length offset: 8

Diameter: 0.01 mm

Length: 24 mm

Number of flutes: 4

Tool type: flat end mill

Tool product:

Holder description:


CT40 - 0.1875 x 4.00 End

Mill Holder

Holder vendor: Lyndex

Holder product:

C4016-0187



Operation 2/2

Description: 2D Adaptive2

Strategy: Adaptive 2D

WCS: 0

Tolerance: 0.01 mm

Stock to leave: 0 mm

Maximum stepdown:

0.5 mm

Optimal load: 0.08 mm

Load deviation: 0.008 mm

Maximum Z: 15 mm

Minimum Z: -3 mm

Maximum spindle speed:

5000 rpm

Maximum feedrate:

1000 mm/min

Cutting distance:

68431.238 mm

Rapid distance:

46431.263 mm

Estimated cycle time:

1h 14m 17s

Coolant: Flood

Number: 4

Diameter offset: 4

Length offset: 4

Diameter: 0.2 mm

Length: 24 mm

Number of flutes: 4

Tool type: flat end mill

Tool product:

Holder description:

CT40 - 0.125 x 1.38 End Mill

Holder

Holder vendor:

Lyndex-Nikken

Holder product:

C40S6-0125

