


Setup Sheet for Program 1001

▼ Summary

Program comment:
Design document: basee plate v2
Product version: Fusion CAM 2601.0.90
Created: 15/4/2025 11:32:33 am
Number of setups: 1

Number of operations: 2
Number of tools: 2
Tools: T1 T2
Maximum Z: 15 mm
Minimum Z: -3 mm

Maximum feedrate: 1000 mm/min
Maximum spindle speed: 5000 rpm
Cutting distance: 5307.338 mm
Rapid distance: 1516.136 mm
Estimated cycle time: 7m 5s

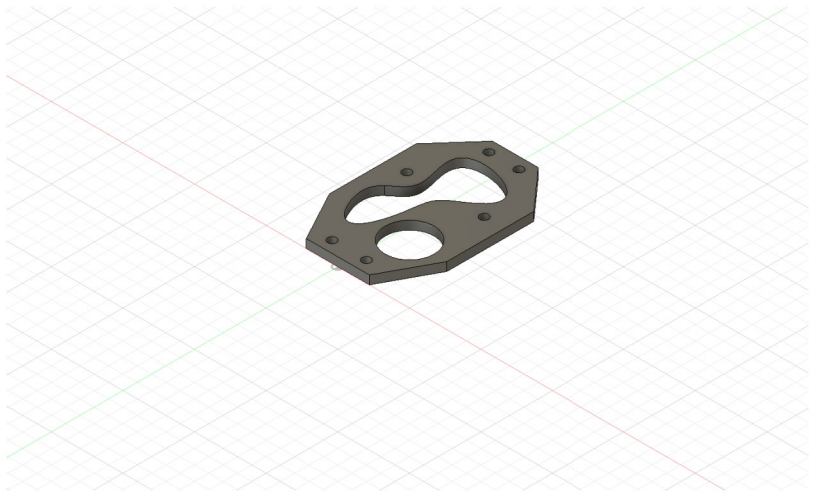


▼ Tools

Number: 1
Diameter offset: 1
Length offset: 1
Tool type: flat end mill
Diameter: 8 mm
Length: 24 mm

Number of flutes: 3
Tool product:
Minimum Z: -3 mm
Maximum feedrate: 1000 mm/min
Maximum spindle speed: 5000 rpm
Cutting distance: 5259.338 mm


Rapid distance: 1342.221 mm
Estimated cycle time: 6m 57s
Holder description: CT40 - 0.250 x 4.00 End Mill Holder
Holder vendor: Lyndex
Holder product: C4016-0250



Number: 2
Diameter offset: 2
Length offset: 2
Tool type: flat end mill
Diameter: 3 mm
Length: 24 mm

Number of flutes: 3
Tool product:
Minimum Z: -3 mm
Maximum feedrate: 333.3 mm/min
Maximum spindle speed: 5000 rpm
Cutting distance: 48 mm

Rapid distance: 173.915 mm
Estimated cycle time: 9s
Holder description: CT40 - 0.125 x 1.38 End Mill Holder
Holder vendor: Lyndex-Nikken
Holder product: C40S6-0125



▼ Setup

Description: Setup1
WCS: 0

Stock:
x: 70 mm
y: 70 mm
z: 3 mm
Part:
x: 62 mm
y: 41 mm
z: 3 mm

Stock lower:
x: 0 mm
y: -35 mm
z: -3 mm
Stock upper:
x: 70 mm
y: 35 mm
z: 0 mm

▼ Operations

Operation 1/2

Description: 2D Pocket2**Strategy:** Pocket 2D**WCS:** 0**Tolerance:** 0.1 mm**Stock to leave:** 0 mm**Maximum stepdown:**

0.8 mm

Maximum stepover: 4.8 mm**Maximum Z:** 15 mm**Minimum Z:** -3 mm**Maximum spindle speed:**

5000 rpm

Maximum feedrate:

1000 mm/min

Cutting distance:

5259.338 mm


Rapid distance: 1342.221 mm**Estimated cycle time:**

6m 57s

Coolant: Flood**Number:** 1**Diameter offset:** 1**Length offset:** 1**Diameter:** 8 mm**Length:** 24 mm**Number of flutes:** 3**Tool type:** flat end mill**Tool product:****Holder description:**

CT40 - 0.250 x 4.00 End Mill

Holder

Holder vendor: Lyndex**Holder product:** C4016-0250

Operation 2/2

Description: Drill1**Strategy:** Drilling**WCS:** 0**Tolerance:** 0.01 mm**Maximum Z:** 15 mm**Minimum Z:** -3 mm**Maximum spindle speed:**

5000 rpm

Maximum feedrate:

333.3 mm/min

Cutting distance: 48 mm**Rapid distance:** 173.915 mm**Estimated cycle time:** 9s**Coolant:** Flood**Number:** 2**Diameter offset:** 2**Length offset:** 2**Diameter:** 3 mm**Length:** 24 mm**Number of flutes:** 3**Tool type:** flat end mill**Tool product:****Holder description:**

CT40 - 0.125 x 1.38 End Mill

Holder

Holder vendor:

Lyndex-Nikken

Holder product: C40S6-0125