


Setup Sheet for Program 1001

▼ Summary

Program comment:
Design document: gear with handle v2
Product version: Fusion CAM 2601.0.90
Created: 15/4/2025 11:35:06 am
Number of setups: 1


Number of operations: 2
Number of tools: 2
Tools: T1 T2
Maximum Z: 15 mm
Minimum Z: -3 mm

Maximum feedrate: 1000 mm/min
Maximum spindle speed: 5000 rpm
Cutting distance: 12478.055 mm
Rapid distance: 11896.627 mm
Estimated cycle time: 13m 6s

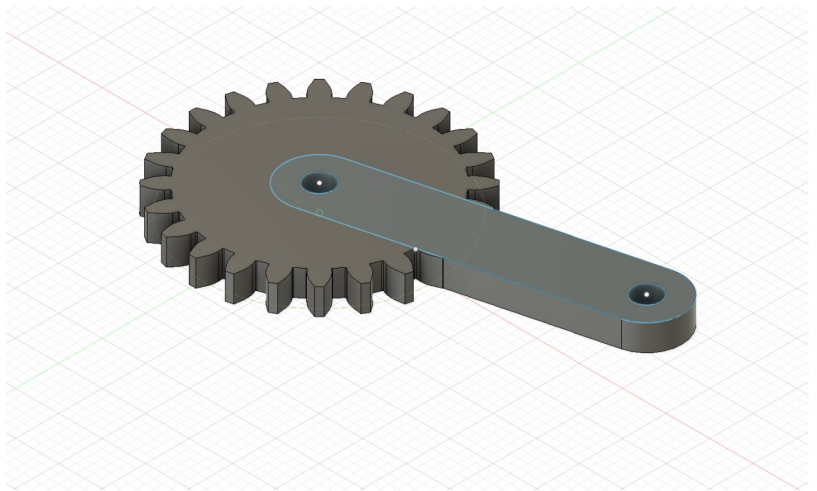

▼ Tools

Number: 1	Number of flutes: 3	Rapid distance: 11829.627 mm
Diameter offset: 1	Tool product:	Estimated cycle time: 13m 4s
Length offset: 1	Minimum Z: -3 mm	Holder description: CT40 - 0.1875 x 4.00 End Mill Holder
Tool type: flat end mill	Maximum feedrate: 1000 mm/min	Holder vendor: Lyndex
Diameter: 0.5 mm	Maximum spindle speed: 5000 rpm	Holder product: C4016-0187
Length: 24 mm	Cutting distance: 12462.055 mm	



Number: 2	Length: 24 mm	Maximum spindle speed: 5000 rpm
Diameter offset: 2	Number of flutes: 4	Cutting distance: 16 mm
Length offset: 2	Tool product:	Rapid distance: 67 mm
Tool type: flat end mill	Minimum Z: -3 mm	Estimated cycle time: 3s
Diameter: 3 mm	Maximum feedrate: 333.3 mm/min	Holder product:



▼ Setup

Description: Setup1	Stock:	Stock lower:
WCS: 0	x: 48.64 mm	x: -24.32 mm
	y: 29.25 mm	y: -14.625 mm
	z: 3 mm	z: -3 mm
	Part:	Stock upper:
	x: 48.64 mm	x: 24.32 mm
	y: 29.25 mm	y: 14.625 mm
	z: 3 mm	z: 0 mm

▼ Operations

Operation 1/2

Description: 2D Adaptive1**Strategy:** Adaptive 2D**WCS:** 0**Tolerance:** 0.1 mm**Stock to leave:** 0 mm**Maximum stepdown:**

1.25 mm

Optimal load: 0.2 mm**Load deviation:** 0.02 mm**Maximum Z:** 15 mm**Minimum Z:** -3 mm**Maximum spindle speed:**

5000 rpm

Maximum feedrate:

1000 mm/min

Cutting distance:

12462.055 mm

Rapid distance:

11829.627 mm


Estimated cycle time:

13m 4s

Coolant: Flood**Number:** 1**Diameter offset:** 1**Length offset:** 1**Diameter:** 0.5 mm**Length:** 24 mm**Number of flutes:** 3**Tool type:** flat end mill**Tool product:****Holder description:**

CT40 - 0.1875 x 4.00 End Mill

Holder

Holder vendor: Lyndex**Holder product:** C4016-0187

Operation 2/2

Description: Drill1**Strategy:** Drilling**WCS:** 0**Tolerance:** 0.01 mm**Maximum Z:** 15 mm**Minimum Z:** -3 mm**Maximum spindle speed:**

5000 rpm

Maximum feedrate:

333.3 mm/min

Cutting distance: 16 mm**Rapid distance:** 67 mm**Estimated cycle time:** 3s**Coolant:** Flood**Number:** 2**Diameter offset:** 2**Length offset:** 2**Diameter:** 3 mm**Length:** 24 mm**Number of flutes:** 4**Tool type:** flat end mill**Tool product:****Holder product:**