


Setup Sheet for Program 1001

▼ Summary

Program comment:
Design document: gear servo v2
Product version: Fusion CAM 2601.0.90
Created: 15/4/2025 11:33:58 am
Number of setups: 1

Number of operations: 2
Number of tools: 2
Tools: T1 T2
Maximum Z: 23 mm
Minimum Z: -15 mm

Maximum feedrate: 1000 mm/min
Maximum spindle speed: 5000 rpm
Cutting distance: 6369.266 mm
Rapid distance: 9954.515 mm
Estimated cycle time: 6m 24s

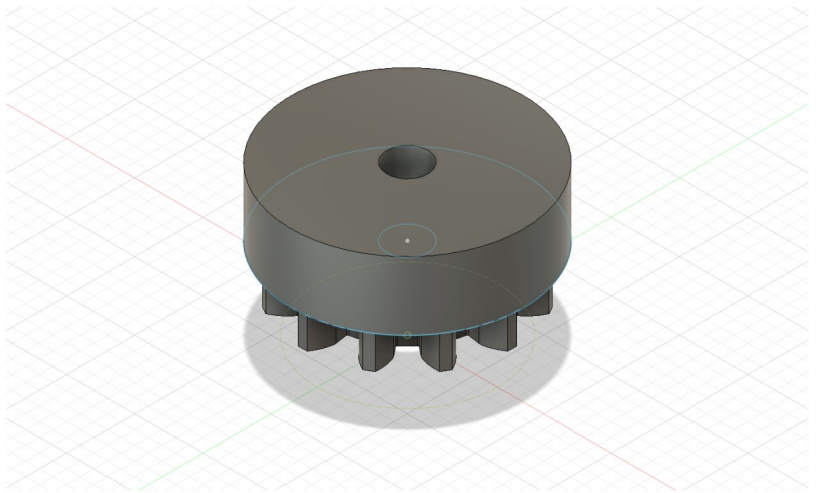


▼ Tools

Number: 1
Diameter offset: 1
Length offset: 1
Tool type: flat end mill
Diameter: 0.5 mm
Length: 24 mm

Number of flutes: 3
Tool product:
Minimum Z: 0 mm
Maximum feedrate: 1000 mm/min
Maximum spindle speed: 5000 rpm
Cutting distance: 6356.266 mm

Rapid distance: 9921.515 mm
Estimated cycle time: 6m 21s
Holder description: CT40 - 0.1875 x 4.00 End Mill Holder
Holder vendor: Lyndex
Holder product: C4016-0187



Number: 2
Diameter offset: 2
Length offset: 2
Tool type: flat end mill
Diameter: 3 mm

Length: 24 mm
Number of flutes: 4
Tool product:
Minimum Z: 0 mm
Maximum feedrate: 333.3 mm/min

Maximum spindle speed: 5000 rpm
Cutting distance: 13 mm
Rapid distance: 33 mm
Estimated cycle time: 2s
Holder product:



▼ Setup

Description: Setup1
WCS: 0

Stock:
x: 17 mm
y: 17 mm
z: 8 mm
Part:
x: 17 mm
y: 17 mm
z: 8 mm

Stock lower:
x: 0 mm
y: 0 mm
z: 0 mm
Stock upper:
x: 17 mm
y: 17 mm
z: 8 mm

▼ Operations

Operation 1/2

Description: 2D Adaptive2**Strategy:** Adaptive 2D**WCS:** 0**Tolerance:** 0.1 mm**Stock to leave:** 0 mm**Maximum stepdown:**

1.25 mm

Optimal load: 0.2 mm**Load deviation:** 0.02 mm**Maximum spindle speed:**

5000 rpm

Maximum feedrate:

1000 mm/min

Cutting distance:

6356.266 mm


Rapid distance: 9921.515 mm**Estimated cycle time:**

6m 21s

Coolant: Flood**Number:** 1**Diameter offset:** 1**Length offset:** 1**Diameter:** 0.5 mm**Length:** 24 mm**Number of flutes:** 3**Tool type:** flat end mill**Tool product:****Holder description:**

CT40 - 0.1875 x 4.00 End Mill

Holder

Holder vendor: Lyndex**Holder product:** C4016-0187

Operation 2/2

Description: Drill1**Strategy:** Drilling**WCS:** 0**Tolerance:** 0.01 mm**Maximum spindle speed:**

5000 rpm

Maximum feedrate:

333.3 mm/min

Cutting distance: 13 mm**Rapid distance:** 33 mm**Estimated cycle time:** 2s**Coolant:** Flood**Number:** 2**Diameter offset:** 2**Length offset:** 2**Diameter:** 3 mm**Length:** 24 mm**Number of flutes:** 4**Tool type:** flat end mill**Tool product:****Holder product:**