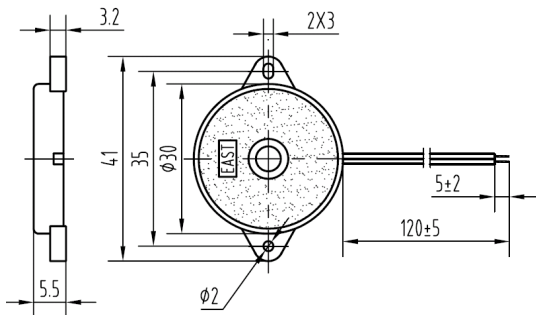
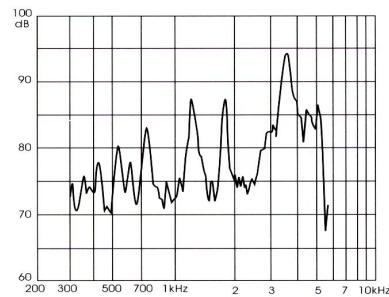


**External-driven Piezo Transducer****TFM-01****DIMENSIONS: (Unit: mm)****FEATURES:**

- Low Frequency
- Low Current Drain
- Light and compact

**APPLICATIONS:**

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

**CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at

1.3kHz/12V<sub>p-p</sub> Square Wave/30cm.....75dB(A)

Capacitance at 120Hz.....45nF±30%

Allowable Input Voltage.....40V<sub>p-p</sub>

Max. Consumption

at 1.3kHz/12V<sub>p-p</sub> Square Wave..... 3.5mA

Resonant Frequency..... 1.3±0.5kHz

Operating Temperature..... -20~+70°C

Case Material/Color.....ABS/Black

Weight..... 3.5g

Wire Standard.....UL1095-28AWG

**PACKING INFORMATION:**

Packing: 3200 pcs per export carton

Carton Size: 47×30.5×19 cm

G. Weight: 13.0 kgs N. Weight: 11.2 kgs

Address: No. 12. Lane 722. Sangtian Road Jiangdong, Ningbo, 315040 P. R. China

Sales Tel: +86-574-87809820(International)/87805605(Domestic)

Fax: +86-574-87803761

