1. Description

1.1. Project

Project Name	SPI Sound Test
Board Name	custom
Generated with:	STM32CubeMX 4.27.0
Date	07/18/2019

1.2. MCU

MCU Series	STM32F0
MCU Line	STM32F0x0 Value Line
MCU name	STM32F030F4Px
MCU Package	TSSOP20
MCU Pin number	20

2. Pinout Configuration
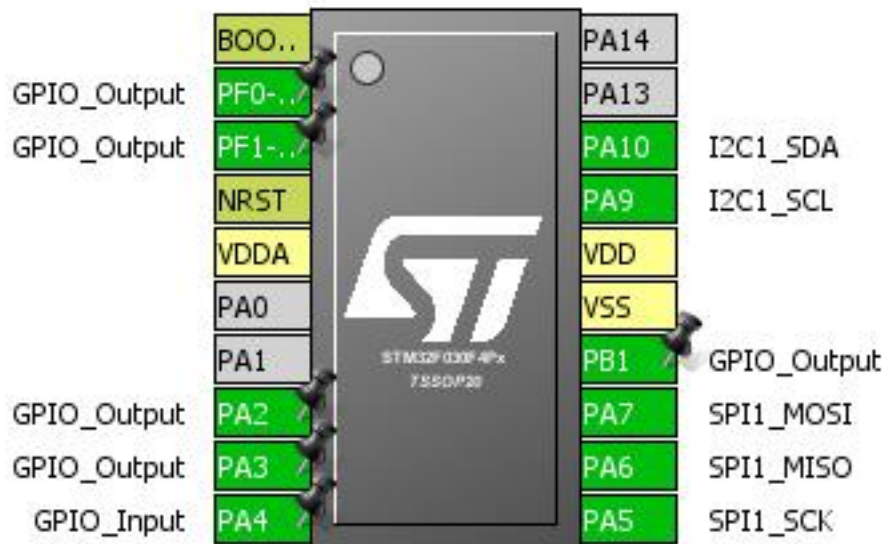
3. Pins Configuration

Pin Number TSSOP20	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	BOOT0	Boot		
2	PF0-OSC_IN *	I/O	GPIO_Output	
3	PF1-OSC_OUT *	I/O	GPIO_Output	
4	NRST	Reset		
5	VDDA	Power		
8	PA2 *	I/O	GPIO_Output	
9	PA3 *	I/O	GPIO_Output	
10	PA4 *	I/O	GPIO_Input	
11	PA5	I/O	SPI1_SCK	
12	PA6	I/O	SPI1_MISO	
13	PA7	I/O	SPI1_MOSI	
14	PB1 *	I/O	GPIO_Output	
15	VSS	Power		
16	VDD	Power		
17	PA9	I/O	I2C1_SCL	
18	PA10	I/O	I2C1_SDA	

* The pin is affected with an I/O function

4. Clock Tree Configuration

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	**Fast Mode Plus ***
I2C Speed Frequency (KHz)	1000
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	**0x00100413 ***

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

5.2. SPI1

Mode: Full-Duplex Master

5.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	**8 Bits ***
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**16 ***
Baud Rate	**2.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

Page 6

5.3. SYS

Timebase Source: SysTick

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PA9	I2C1_SCL	Alternate Function Open Drain	Pull-up	**High ***	
	PA10	I2C1_SDA	Alternate Function Open Drain	Pull-up	**High ***	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	**High ***	
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	**High ***	
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	**High ***	
GPIO	PF0-OSC_IN	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PF1-OSC_OUT	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA4	GPIO_Input	Input mode	**Pull-up ***	n/a	
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 global interrupt	unused		
SPI1 global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F0
Line	STM32F0x0 Value Line
MCU	STM32F030F4Px
Datasheet	024849_Rev2

7.2. Parameter Selection

Temperature	25
Vdd	3.6

8. Software Project

8.1. Project Settings

Name	Value
Project Name	SPI Sound Test
Project Folder	L:\Documents\GitHub\Overwatch-Reaper-Guns\Electrical\Source\SPI Sound Test
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F0 V1.9.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report