

NOTES:




1. WIRE PER TABLE 1 BELOW. WORKMANSHIP TO BE IAW IPC/WHMA-A-620.
2. ITEM 2, CABLE, MUST HAVE AN OD BETWEEN 3.5-5.0 mm (0.138-0.197") TO BE COMPATIBLE WITH ITEM 1.
3. ITEM 4 TO BE LOCATED NO MORE THAN 0.5m FROM ITEM 1 CONNECTOR AND COVERED WITH ITEM 5.

ITEM 4 TO CONTAIN THE FOLLOWING INFORMATION:

1. PART NUMBER (HA-CBL-IM-ETH-02)

2. DATE CODE YYWW FORMAT (EX: 1535)
4. CUT ITEM 3, M12 CABLE, IN HALF AND USE ONE END PER ASSEMBLY.
5. ASSEMBLE ALL SOCKETS PER MANUFACTURERS RECOMMENDATIONS.
6. TEST ALL PINS FOR CONTINUITY AND SHORT TO OTHER PINS.
7. CABLE LENGTH IS MEASURED FROM FACE OF ITEM 1 TO FACE OF ITEM 3, AS SHOWN.
8. COVER SOLDER CONNECTION BETWEEN ITEMS 2 AND 3 WITH ITEM 6, HEAT SHRINK.

TABLE 1: CABLE WIRING			
CONNECT FROM	CONNECT USING	CONNECT TO	SIGNAL
ITEM 1, PIN 1	ITEM 2 (TWISTED PAIR 1)	ITEM 3, PIN 1	Tx+
ITEM 1, PIN 2	ITEM 2 (TWISTED PAIR 1)	ITEM 3, PIN 2	Tx-
ITEM 1, PIN 3	ITEM 2 (TWISTED PAIR 2)	ITEM 3, PIN 3	Rx+
ITEM 1, PIN4	ITEM 2 (TWISTED PAIR 2)	ITEM 3, PIN 4	Rx-

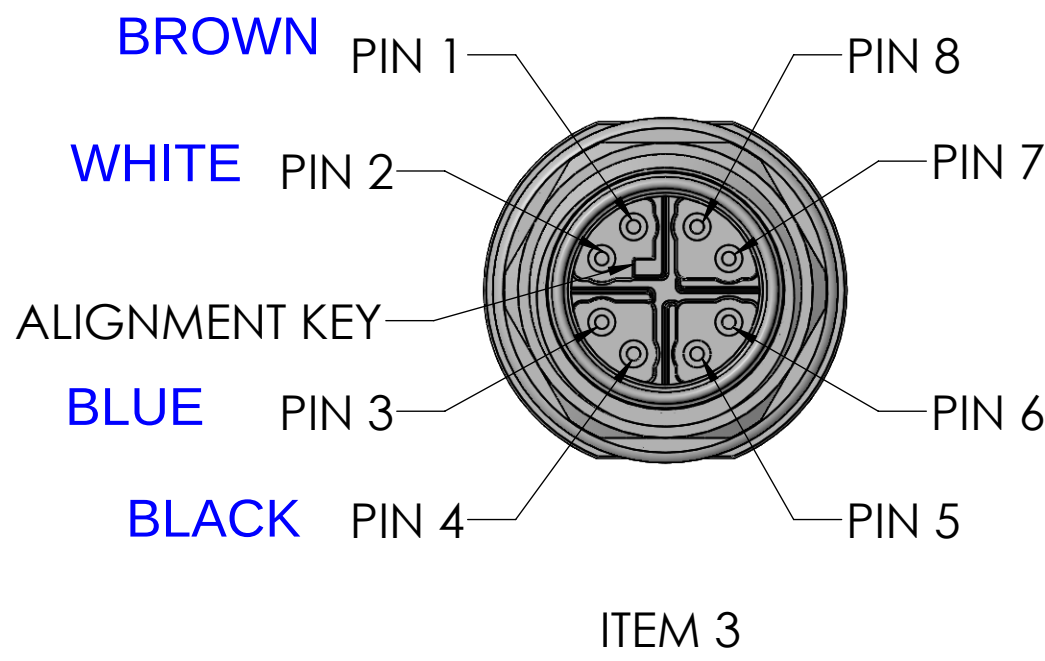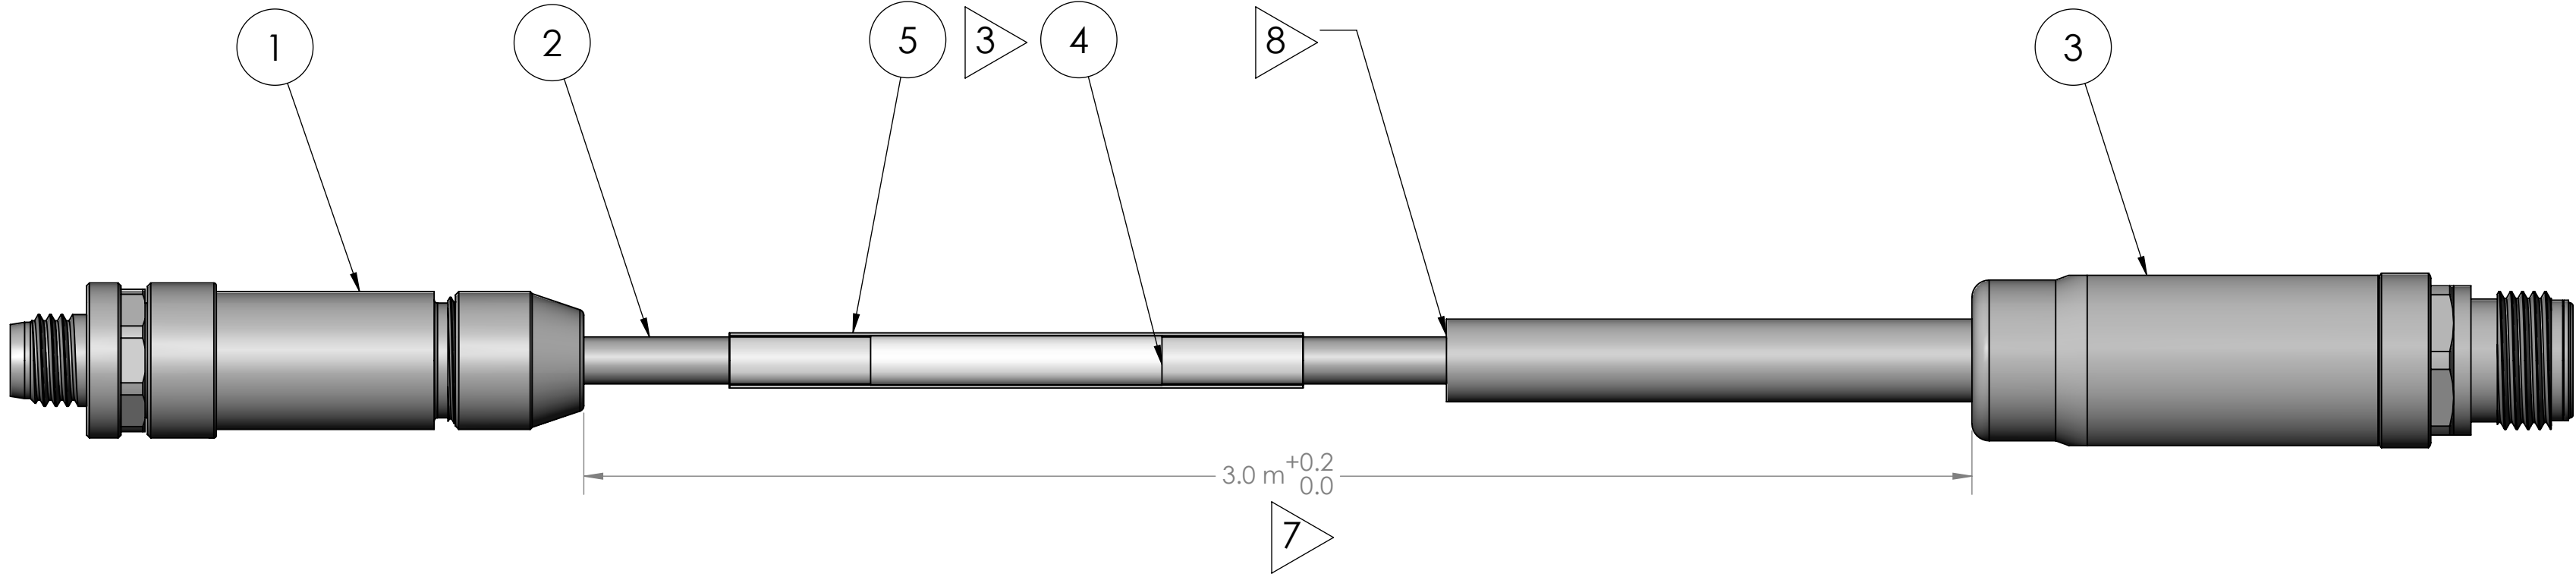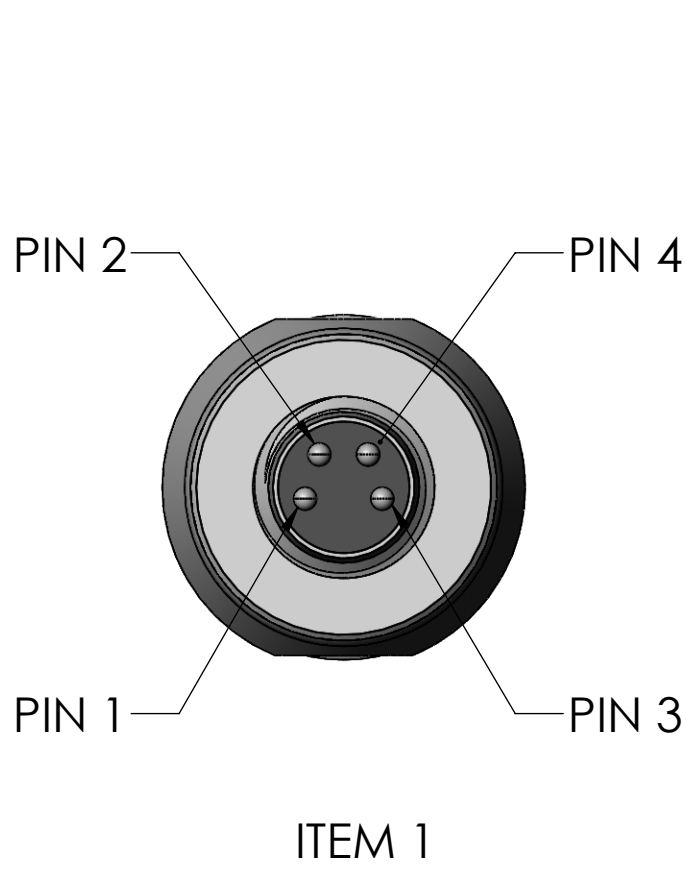

ITEM NO.	PART NUMBER	QTY.	DESCRIPTION	SOURCE	MFG	MFG P/N	MFG 2	MFG P/N 2
1	2003521	1	CONNECTOR, PLUG, MALE PINS, 4 POS., M8	AS SPECIFIED	TE CONNECTIVITY	T4011019041-000		
2	2003573	3 m	CABLE, 4 CONDUCTOR (2 TWISTED PAIRS), 22 AWG, 100' LONG, 0.161" (4.09mm) OD	OPEN	ALPHA WIRE	2466L SL005	DIGIKEY	2466LSL005-ND
3	2003575	0.5	CABLE, PLUG, MALE PINS, 8 POS., M12, X-CODED, 1.5m LONG	AS SPECIFIED	TE CONNECTIVITY	10-03986	DIGIKEY	839-10-03986-ND
4	2002094	1	LABEL, 1.0" X 0.5" METALLIZED POLYESTER	OPEN	BRADY	THT-5-428-10		
5	2003528	A/R	HEAT SHRINK TUBING, CLEAR, .25" ID BEFORE, .13" ID AFTER	OPEN	McMASTER	7496K46		
6	2003070	A/R	MOISTURE SEAL HEAT SHRINK TUBING, 0.31" ID, 3:1 RATIO	OPEN	McMASTER	7861K611		

PROPRIETARY AND TRADE SECRET INFORMATION

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRATA SAFETY PRODUCTS, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
ANGULAR: MACH ± .01
NO PLACE DECIMAL ± 1
ONE PLACE DECIMAL ± .2
TWO PLACE DECIMAL ± .1

MATERIAL

FINISH

PATENTS:
USA (8,232,888; 8,552,882;
8,444,277; 8,169,333; 7,400,471;
6,810,353; 8,710,979; 8,810,390;
8,947,785)
RSA (2007/2919; 2008/2673;
2010/0816; 2010/0908; 2011/07178)
AU (2005289704; 2008316786)
MX (312439)
PATENTS PENDING:
USA; ZA; AU; CA; EP; MX

	NAME	DATE
DRAWN	JL	2/15/24
CHECKED		
ENG APPR.		
MFG APPR.		
G.A.		

STANDARD NOTES:

A. INTERPET THIS DRAWING IAW ASME Y14.100

B. DIMENSION AND TOLERANCE PER ASME Y14.5

C. THIS DRAWING IS CAD GENERATED NO MANUAL CHANGES AUTHORIZED

STRATA SAFETY PRODUCTS, LLC
130 TECHNOLOGY DRIVE
CANONSBURG, PENNSYLVANIA 15317

TITLE:
**IM ETHERNET CABLE, M8 TO M12,
3m LG.**

SIZE D	DWG. NO. HA-CBL-IM-ETH-02	REV A
------------------	-------------------------------------	-----------------

SCALE: 2:1 WEIGHT: SHEET 1 OF 1