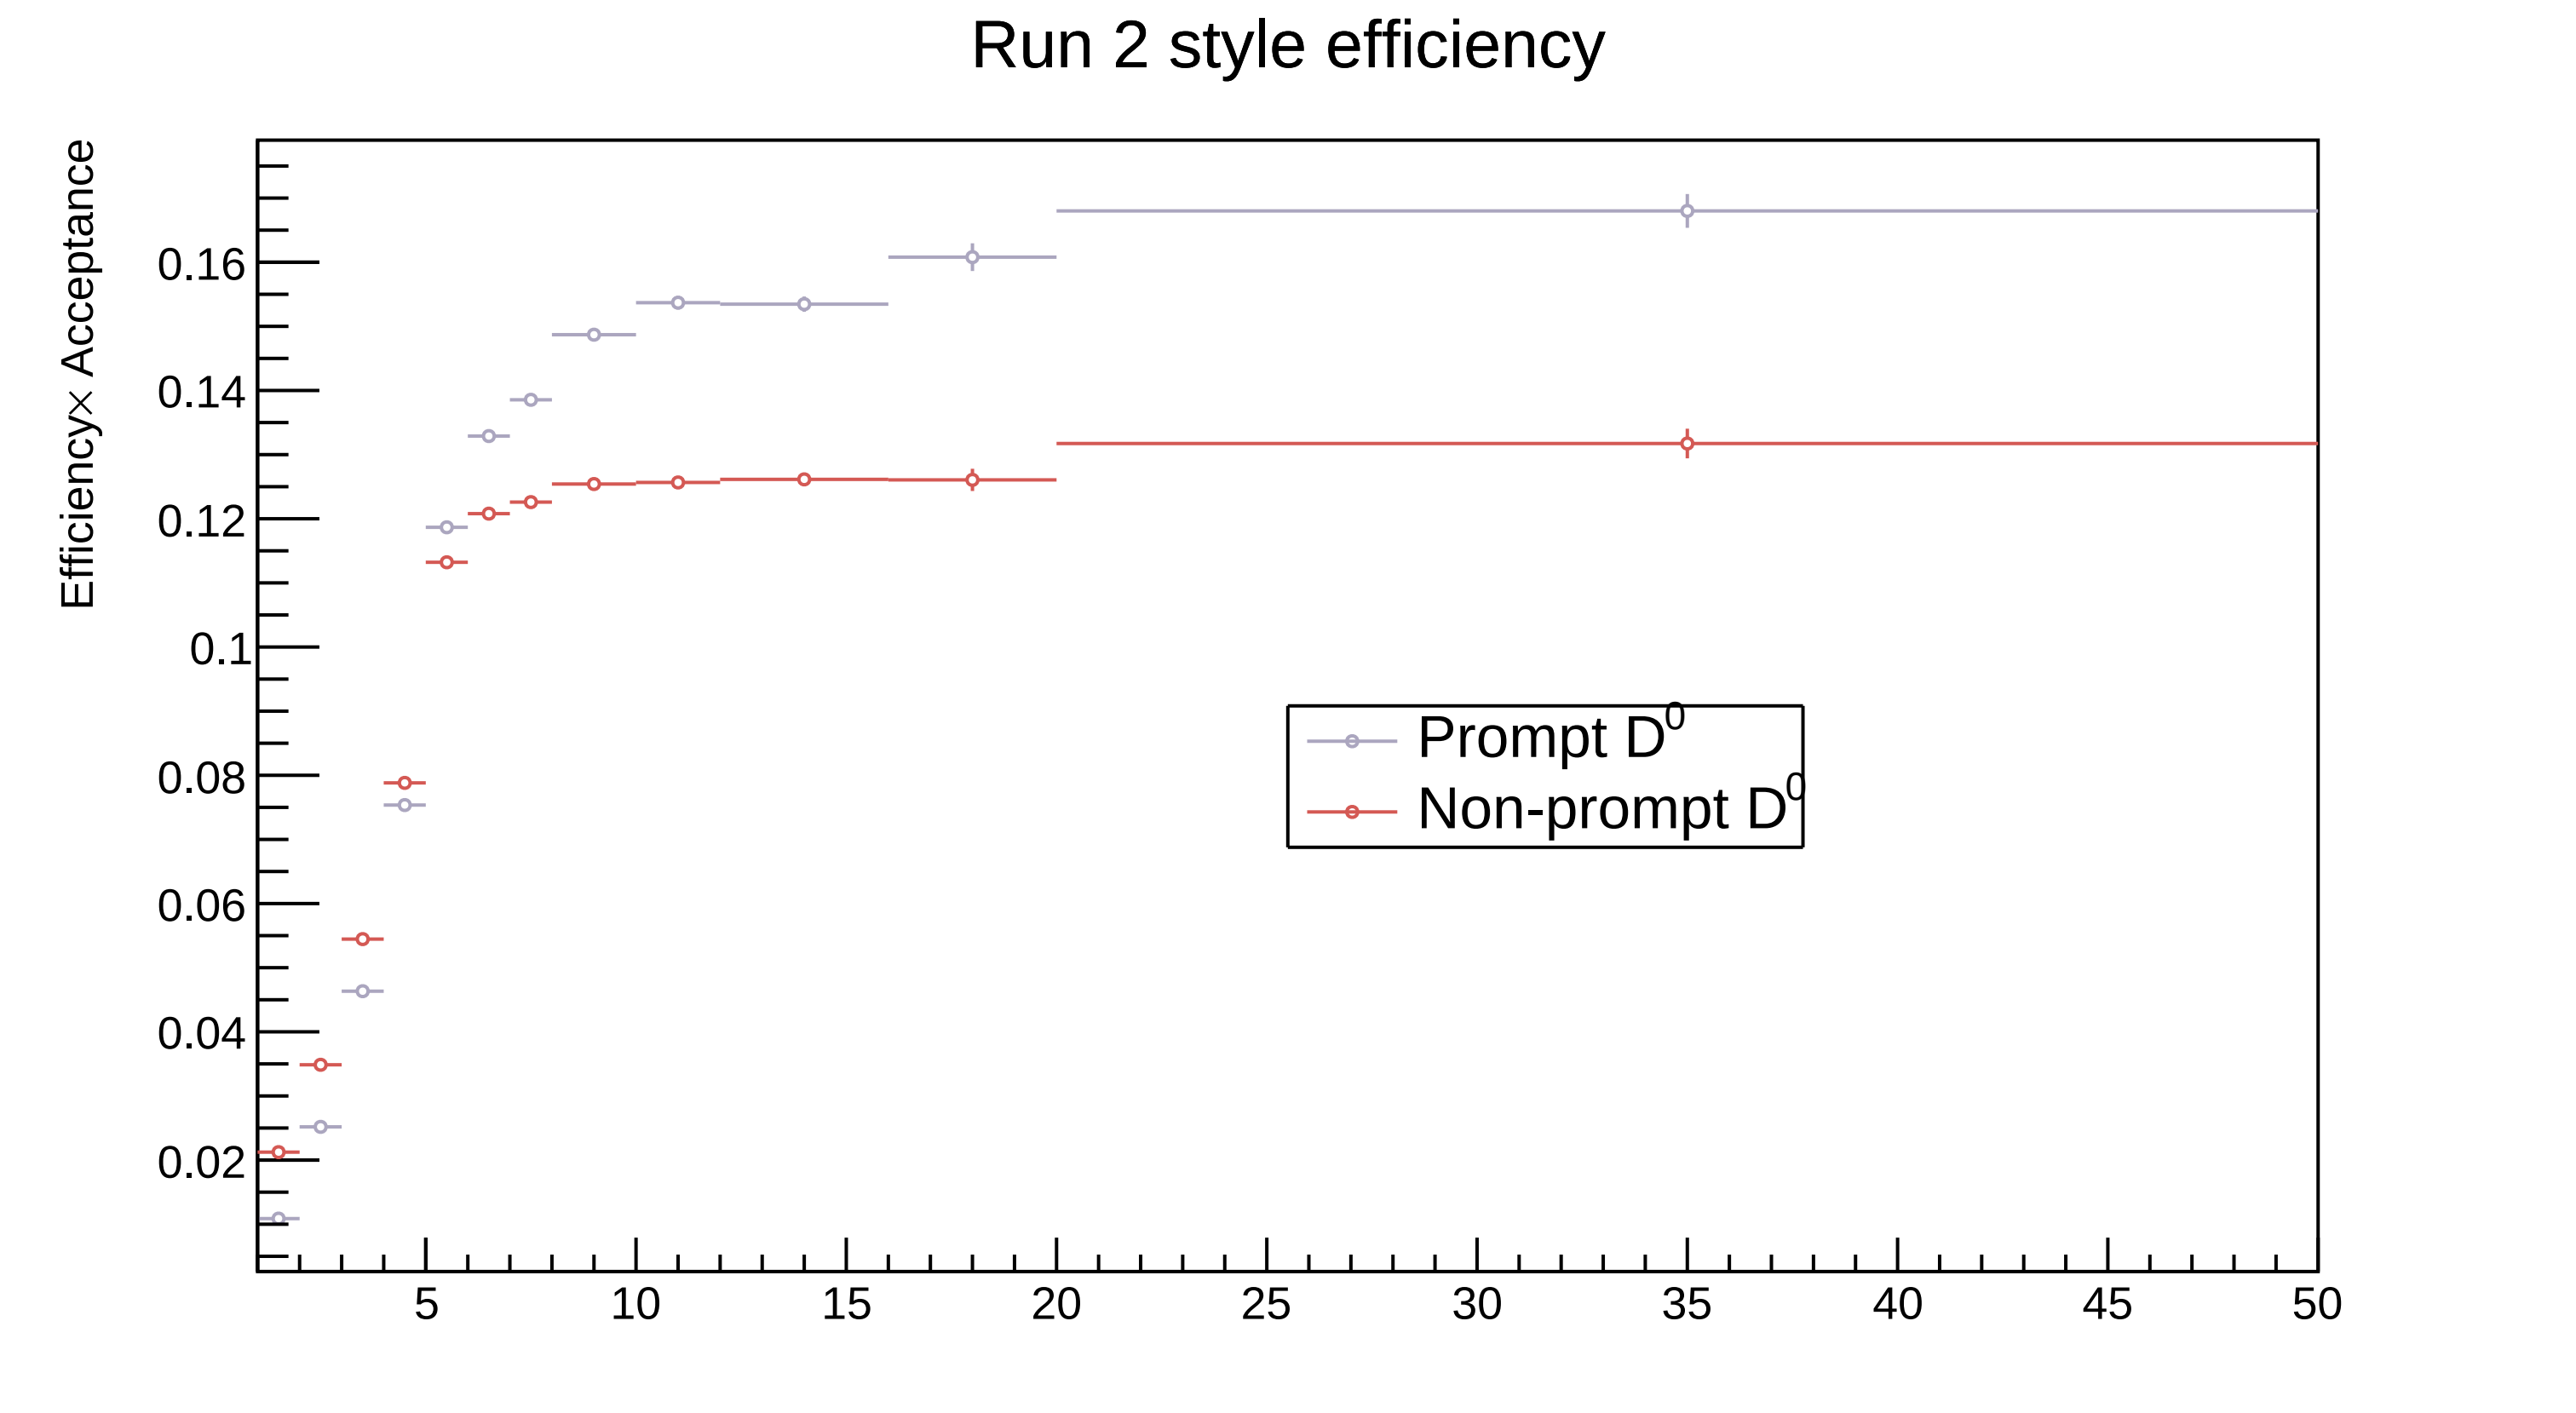

Run 2 style efficiency
Efficiency× Acceptance
0.02
0.04
0.06
0.08
0.1
0.12
0.14
0.16
5
10
15
20
25
30
35
40
45
50
Prompt D0
Non-prompt D0

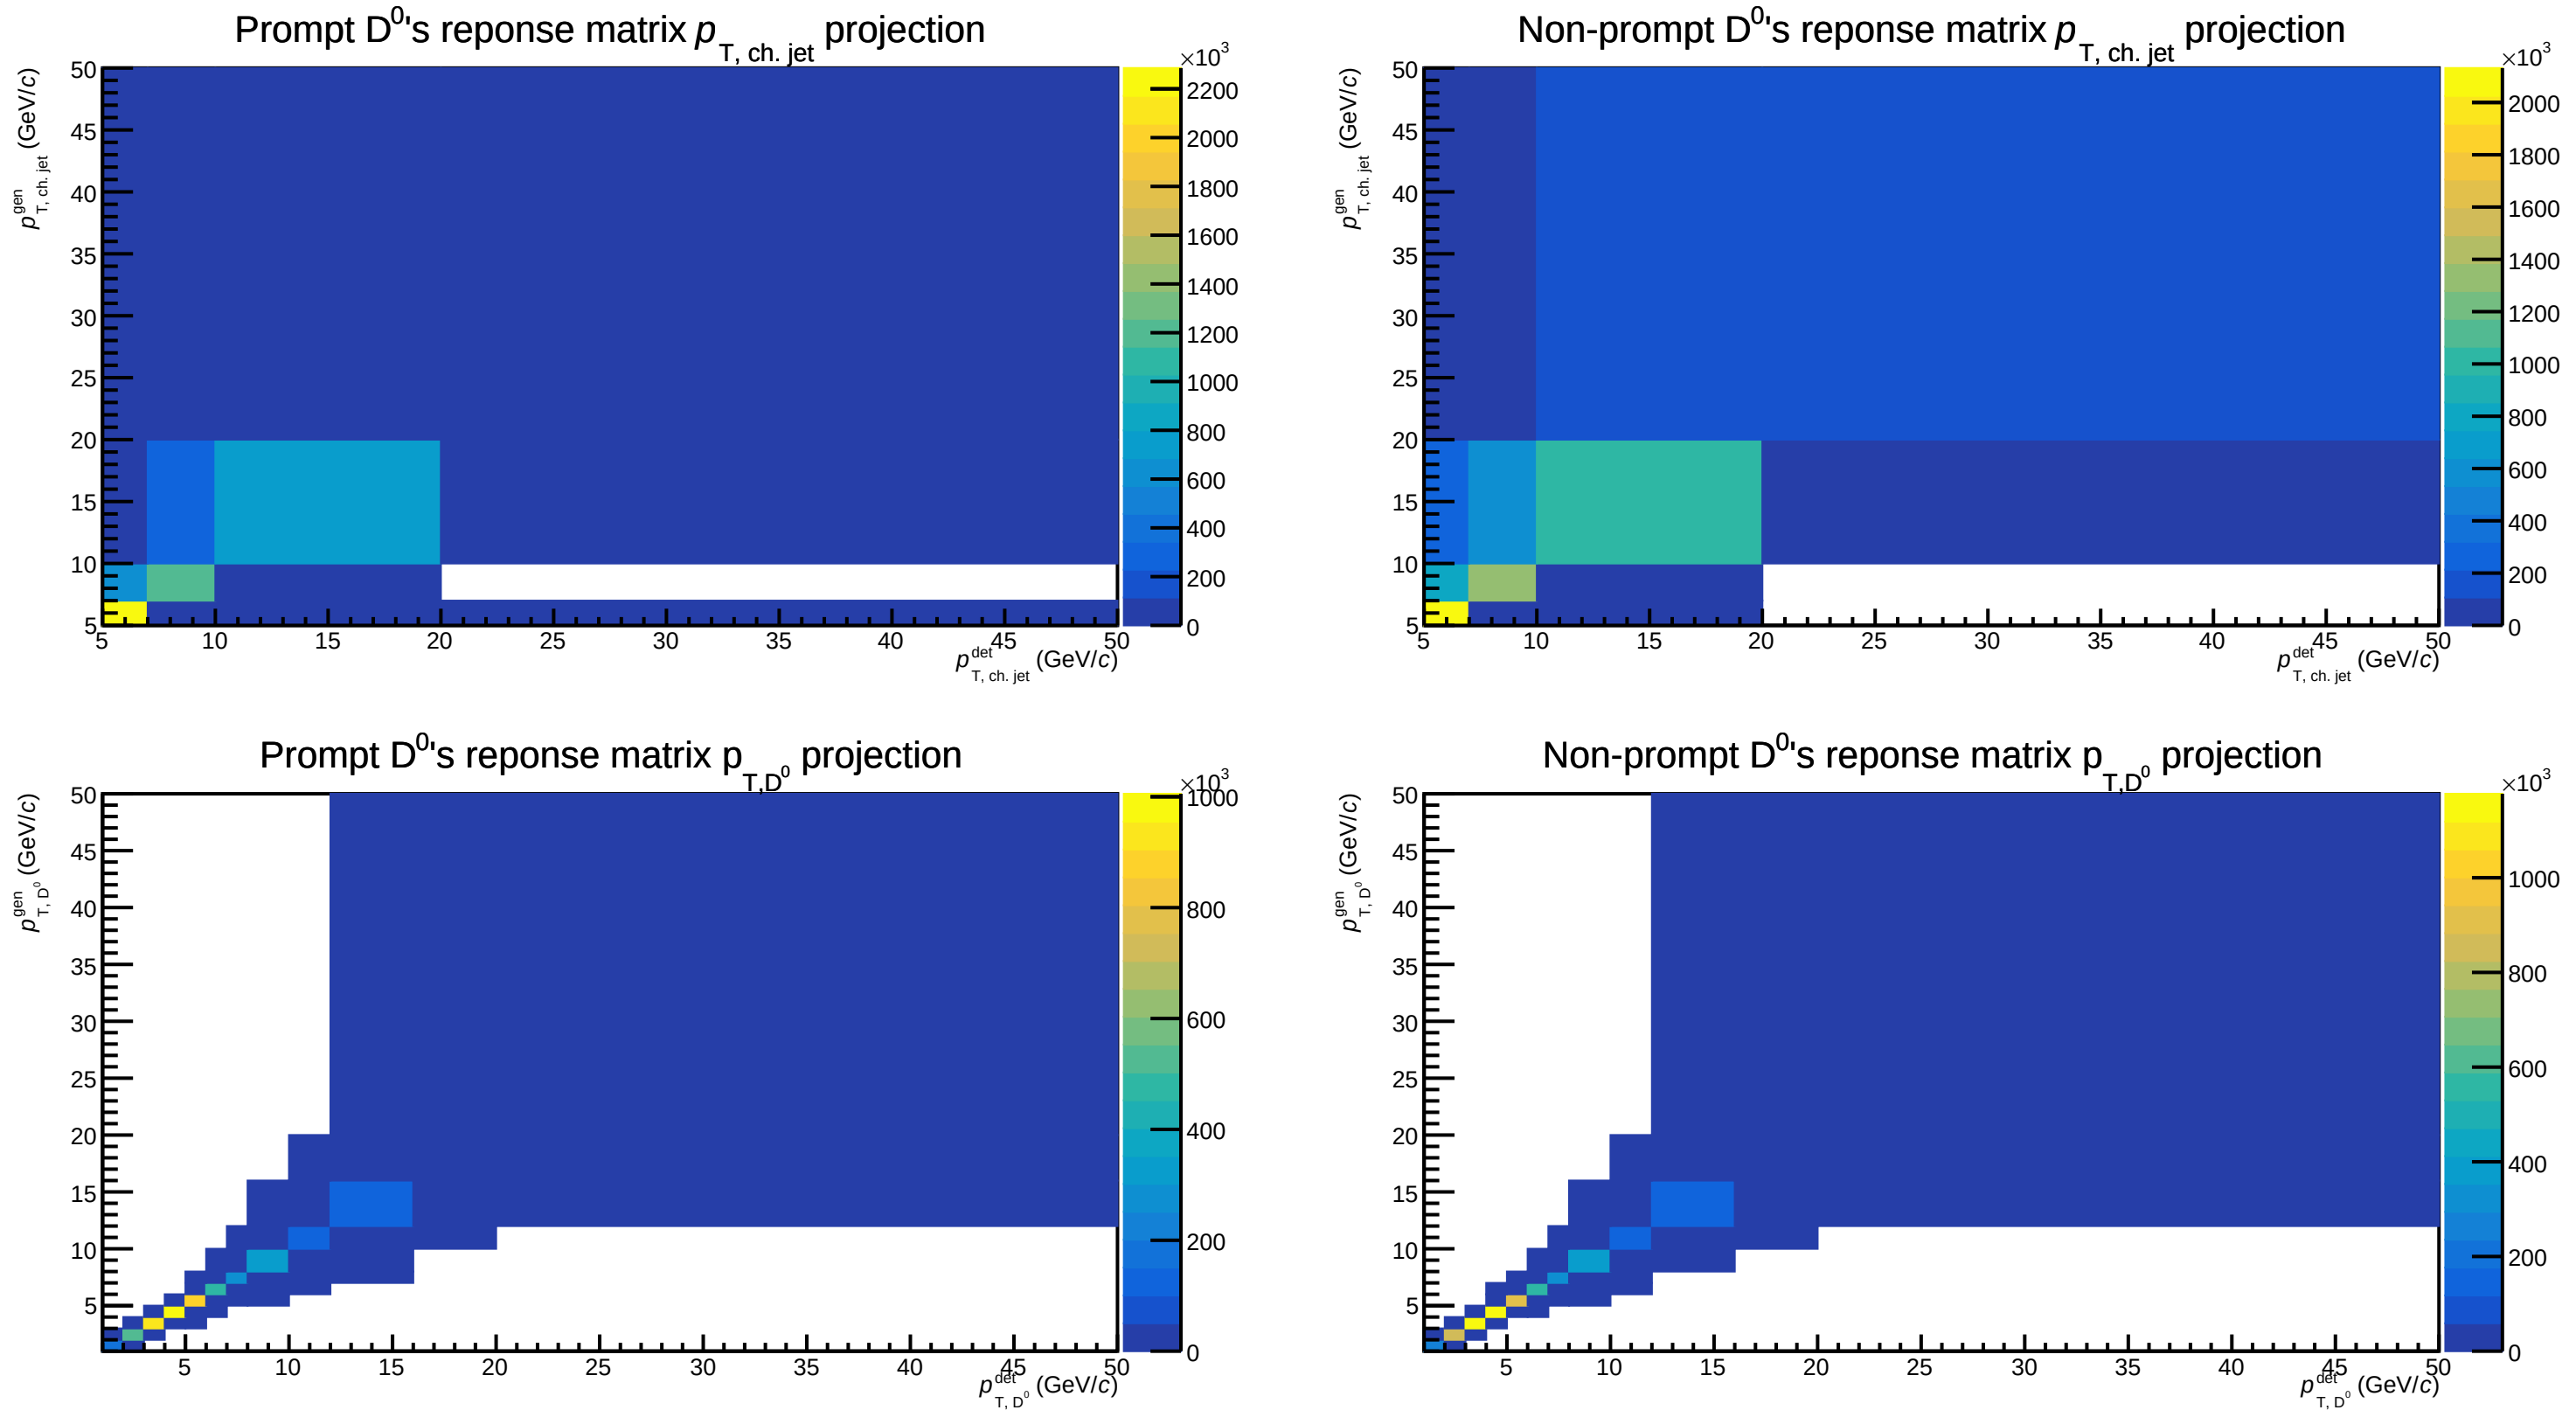
Prompt D^0's reponse matrix $p_{T, ch. jet}$ projection
$p^{gen}_{T, ch. jet}$ (GeV/c)
$p^{det}_{T, ch. jet}$ (GeV/c)
$\times10^3$
Non-prompt D^0's reponse matrix $p_{T, ch. jet}$ projection
$p^{gen}_{T, ch. jet}$ (GeV/c)
$p^{det}_{T, ch. jet}$ (GeV/c)
$\times10^3$
Prompt D^0's reponse matrix p_{T,D^0} projection
p^{gen}_{T, D^0} (GeV/c)
p^{det}_{T, D^0} (GeV/c)
$\times10^3$
Non-prompt D^0's reponse matrix p_{T,D^0} projection
p^{gen}_{T, D^0} (GeV/c)
p^{det}_{T, D^0} (GeV/c)
$\times10^3$

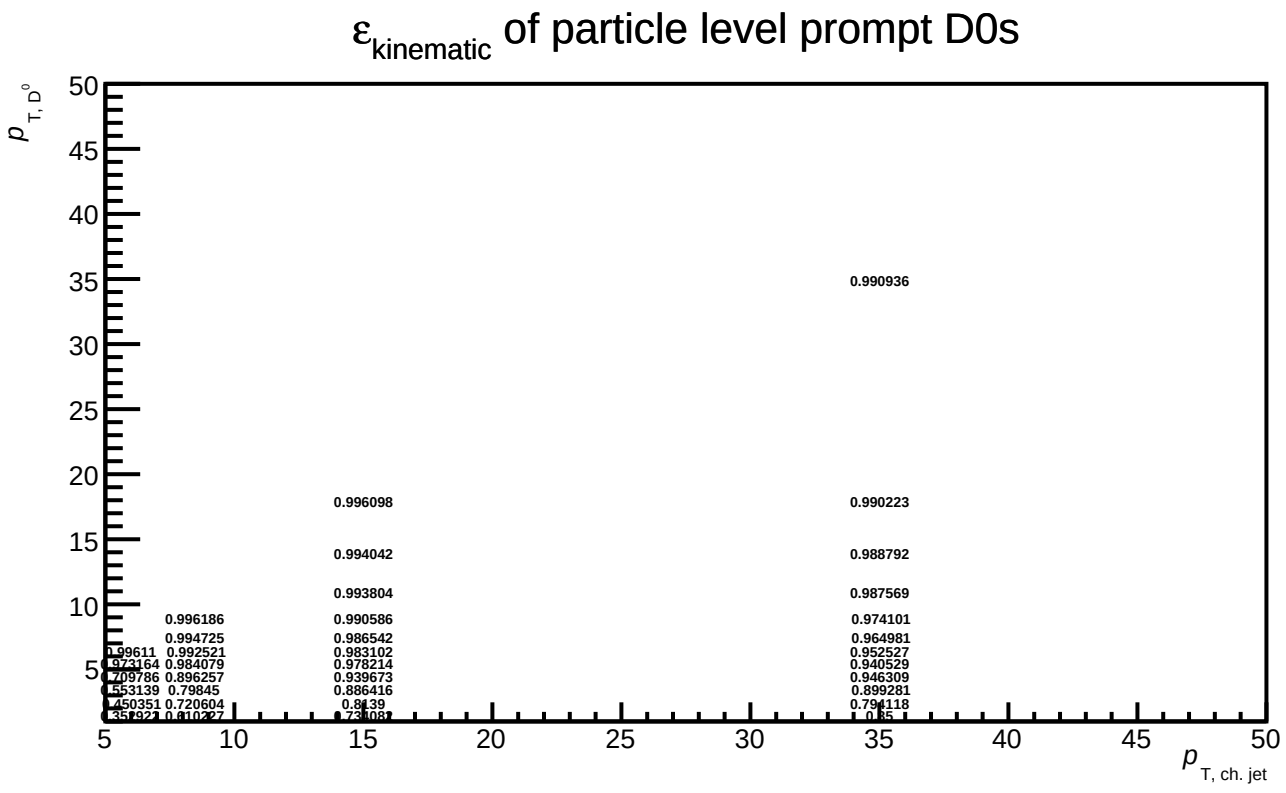
ε_kinematic of particle level prompt D0s
p_T, D0
p_T, ch. jet

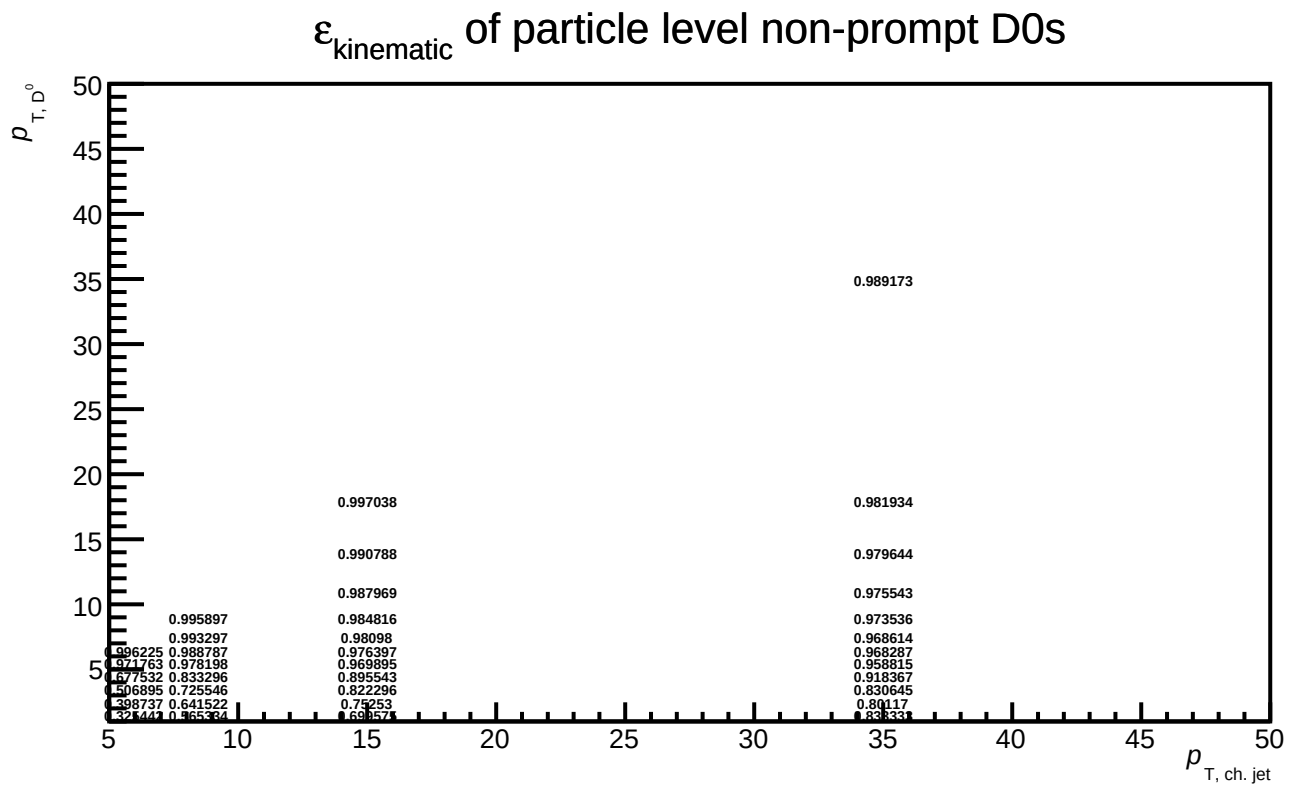
ε_kinematic of particle level non-prompt D0s
p_T, D0
p_T, ch. jet

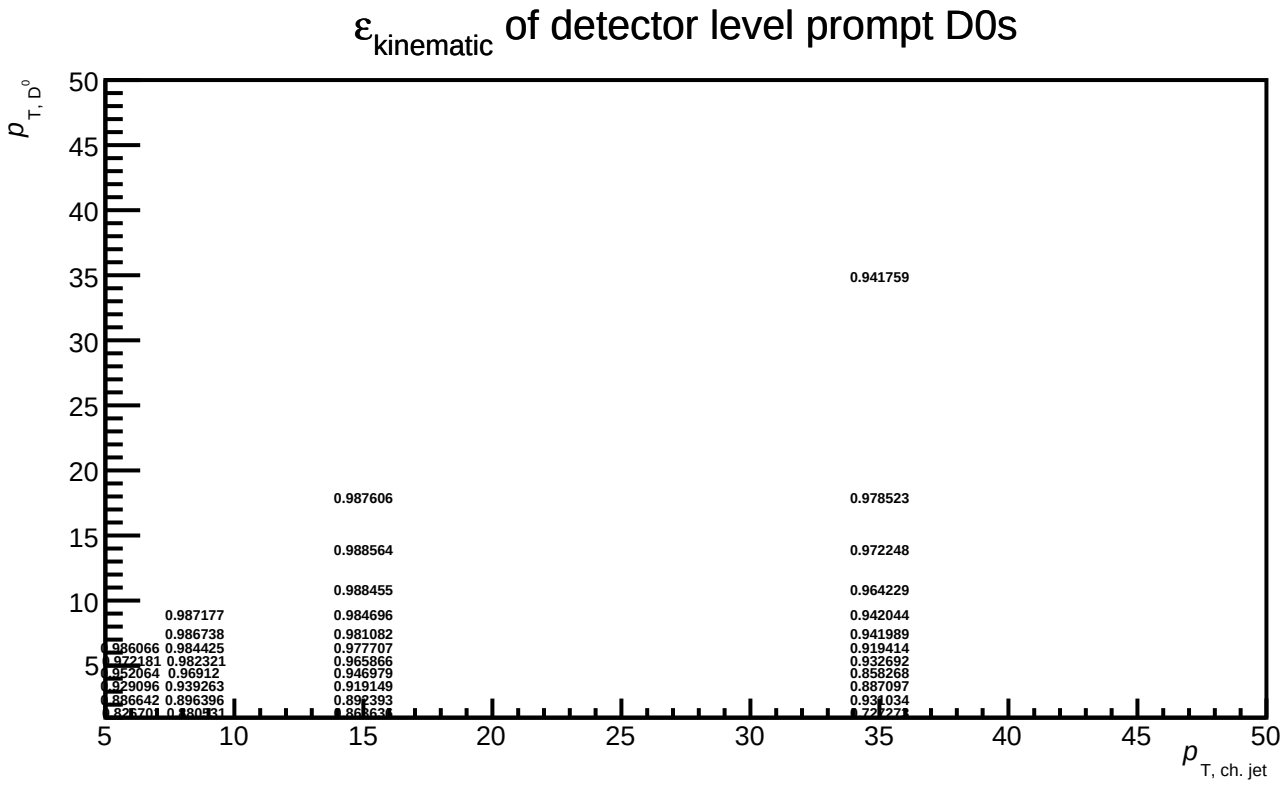
ε_kinematic of detector level prompt D0s
p_T, D0
p_T, ch. jet

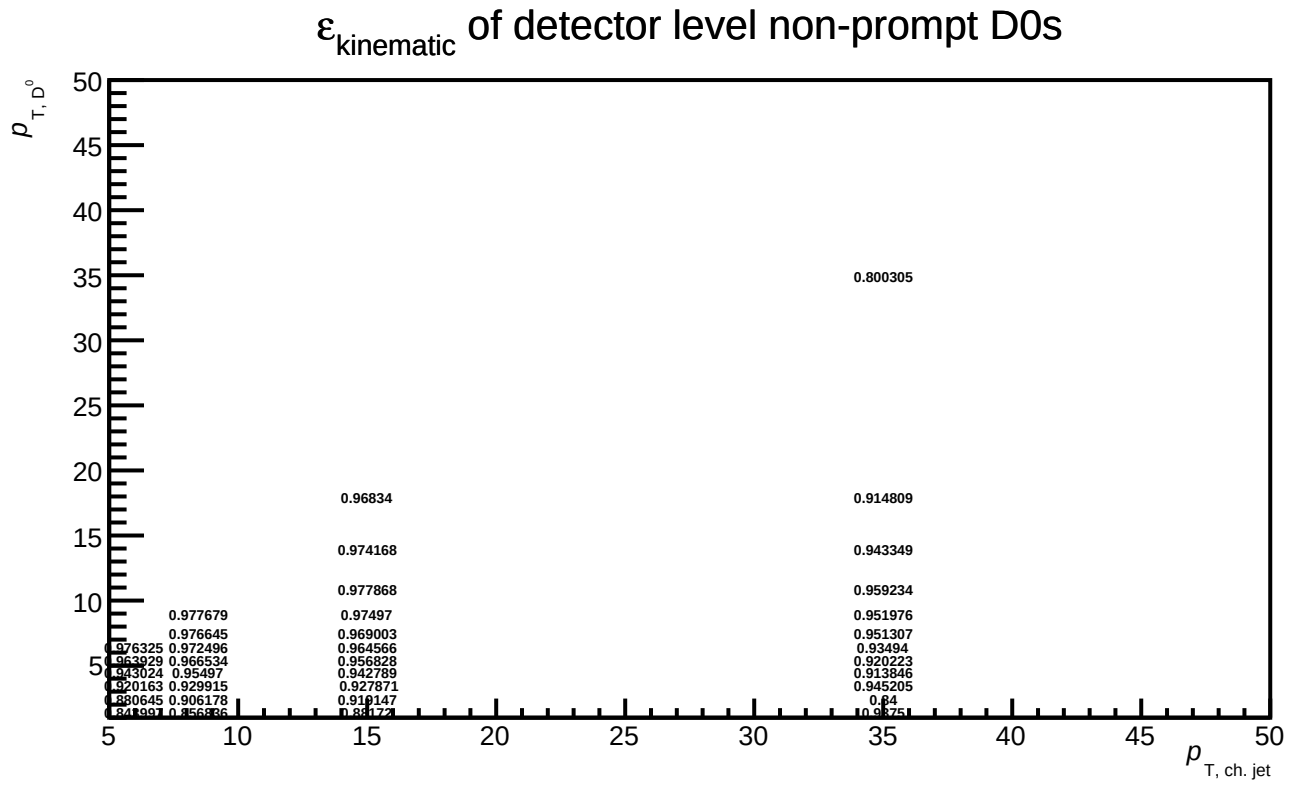
ε_kinematic of detector level non-prompt D0s
p_T, D0
p_T, ch. jet

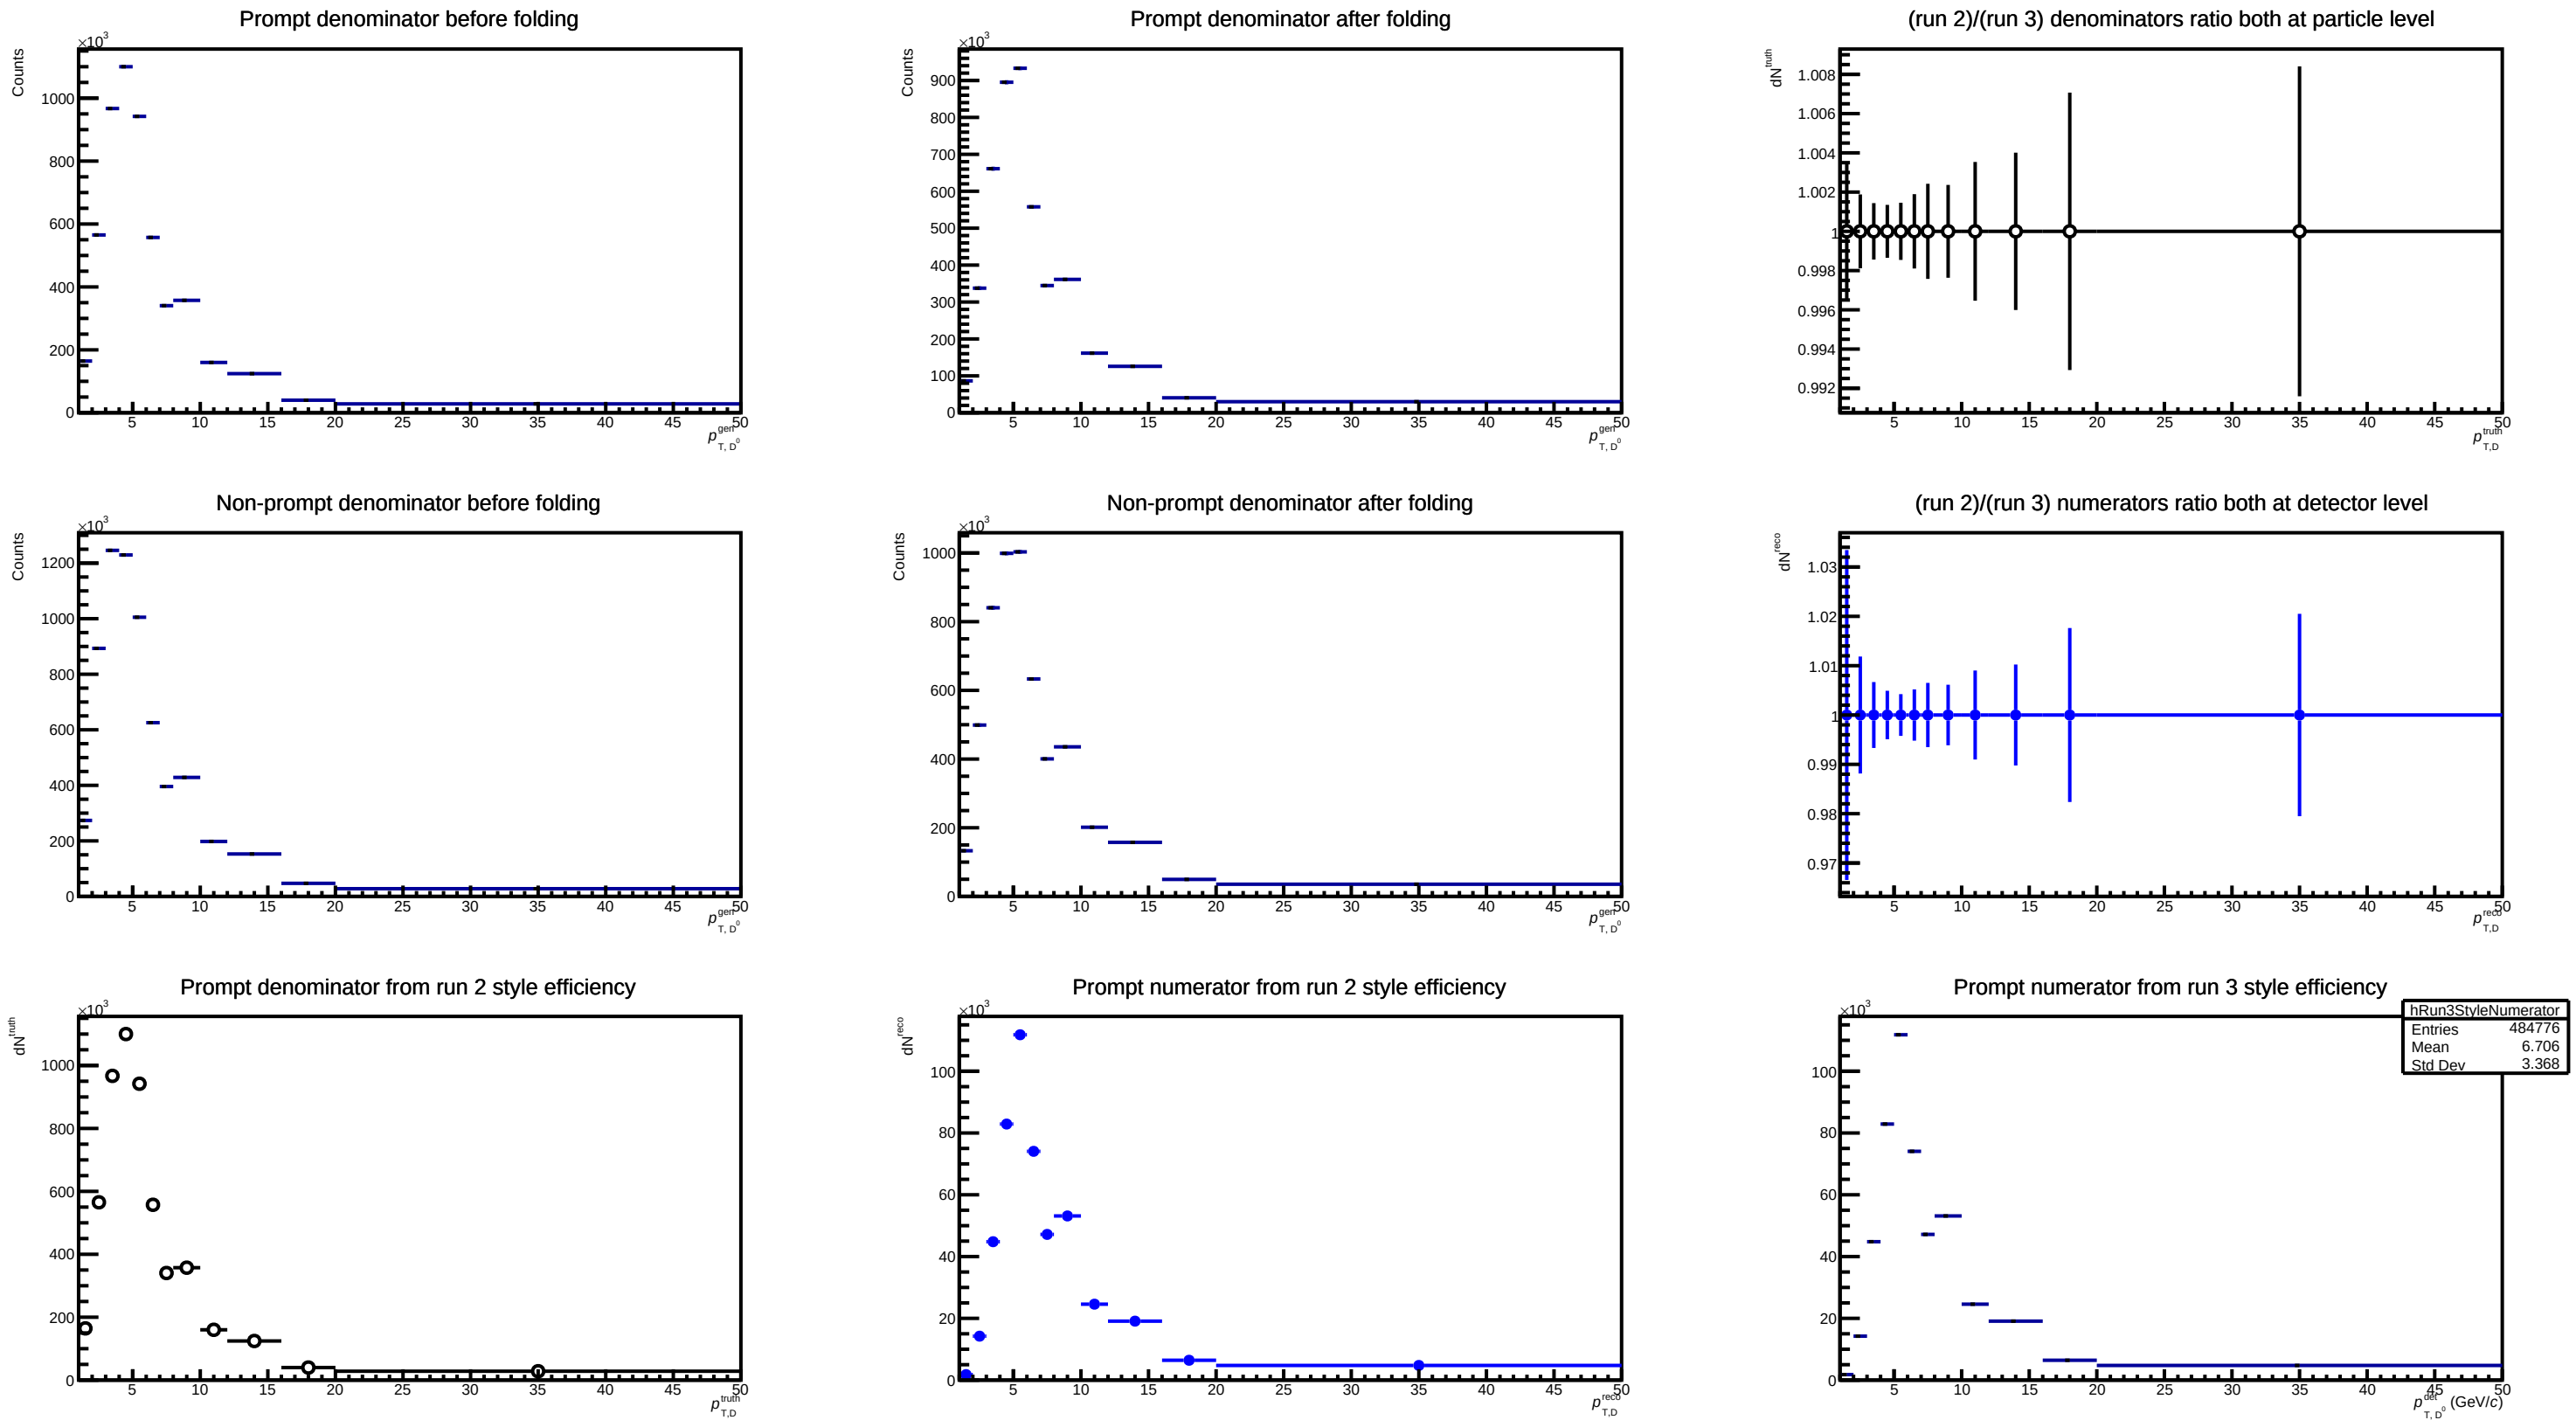

Prompt denominator before folding
Counts
×10³
p^{gen}_{T, D^0}
Prompt denominator after folding
Counts
×10³
p^{gen}_{T, D^0}
(run 2)/(run 3) denominators ratio both at particle level
dN^{truth}
$p^{truth}_{T,D}$
Non-prompt denominator before folding
Counts
×10³
p^{gen}_{T, D^0}
Non-prompt denominator after folding
Counts
×10³
p^{gen}_{T, D^0}
(run 2)/(run 3) numerators ratio both at detector level
dN^{reco}
$p^{reco}_{T,D}$
Prompt denominator from run 2 style efficiency
dN^{truth}
×10³
$p^{truth}_{T,D}$
Prompt numerator from run 2 style efficiency
dN^{reco}
×10³
$p^{reco}_{T,D}$
Prompt numerator from run 3 style efficiency
×10³
hRun3StyleNumerator
Entries 484776
Mean 6.706
Std Dev 3.368
p^{det}_{T, D^0} (GeV/c)

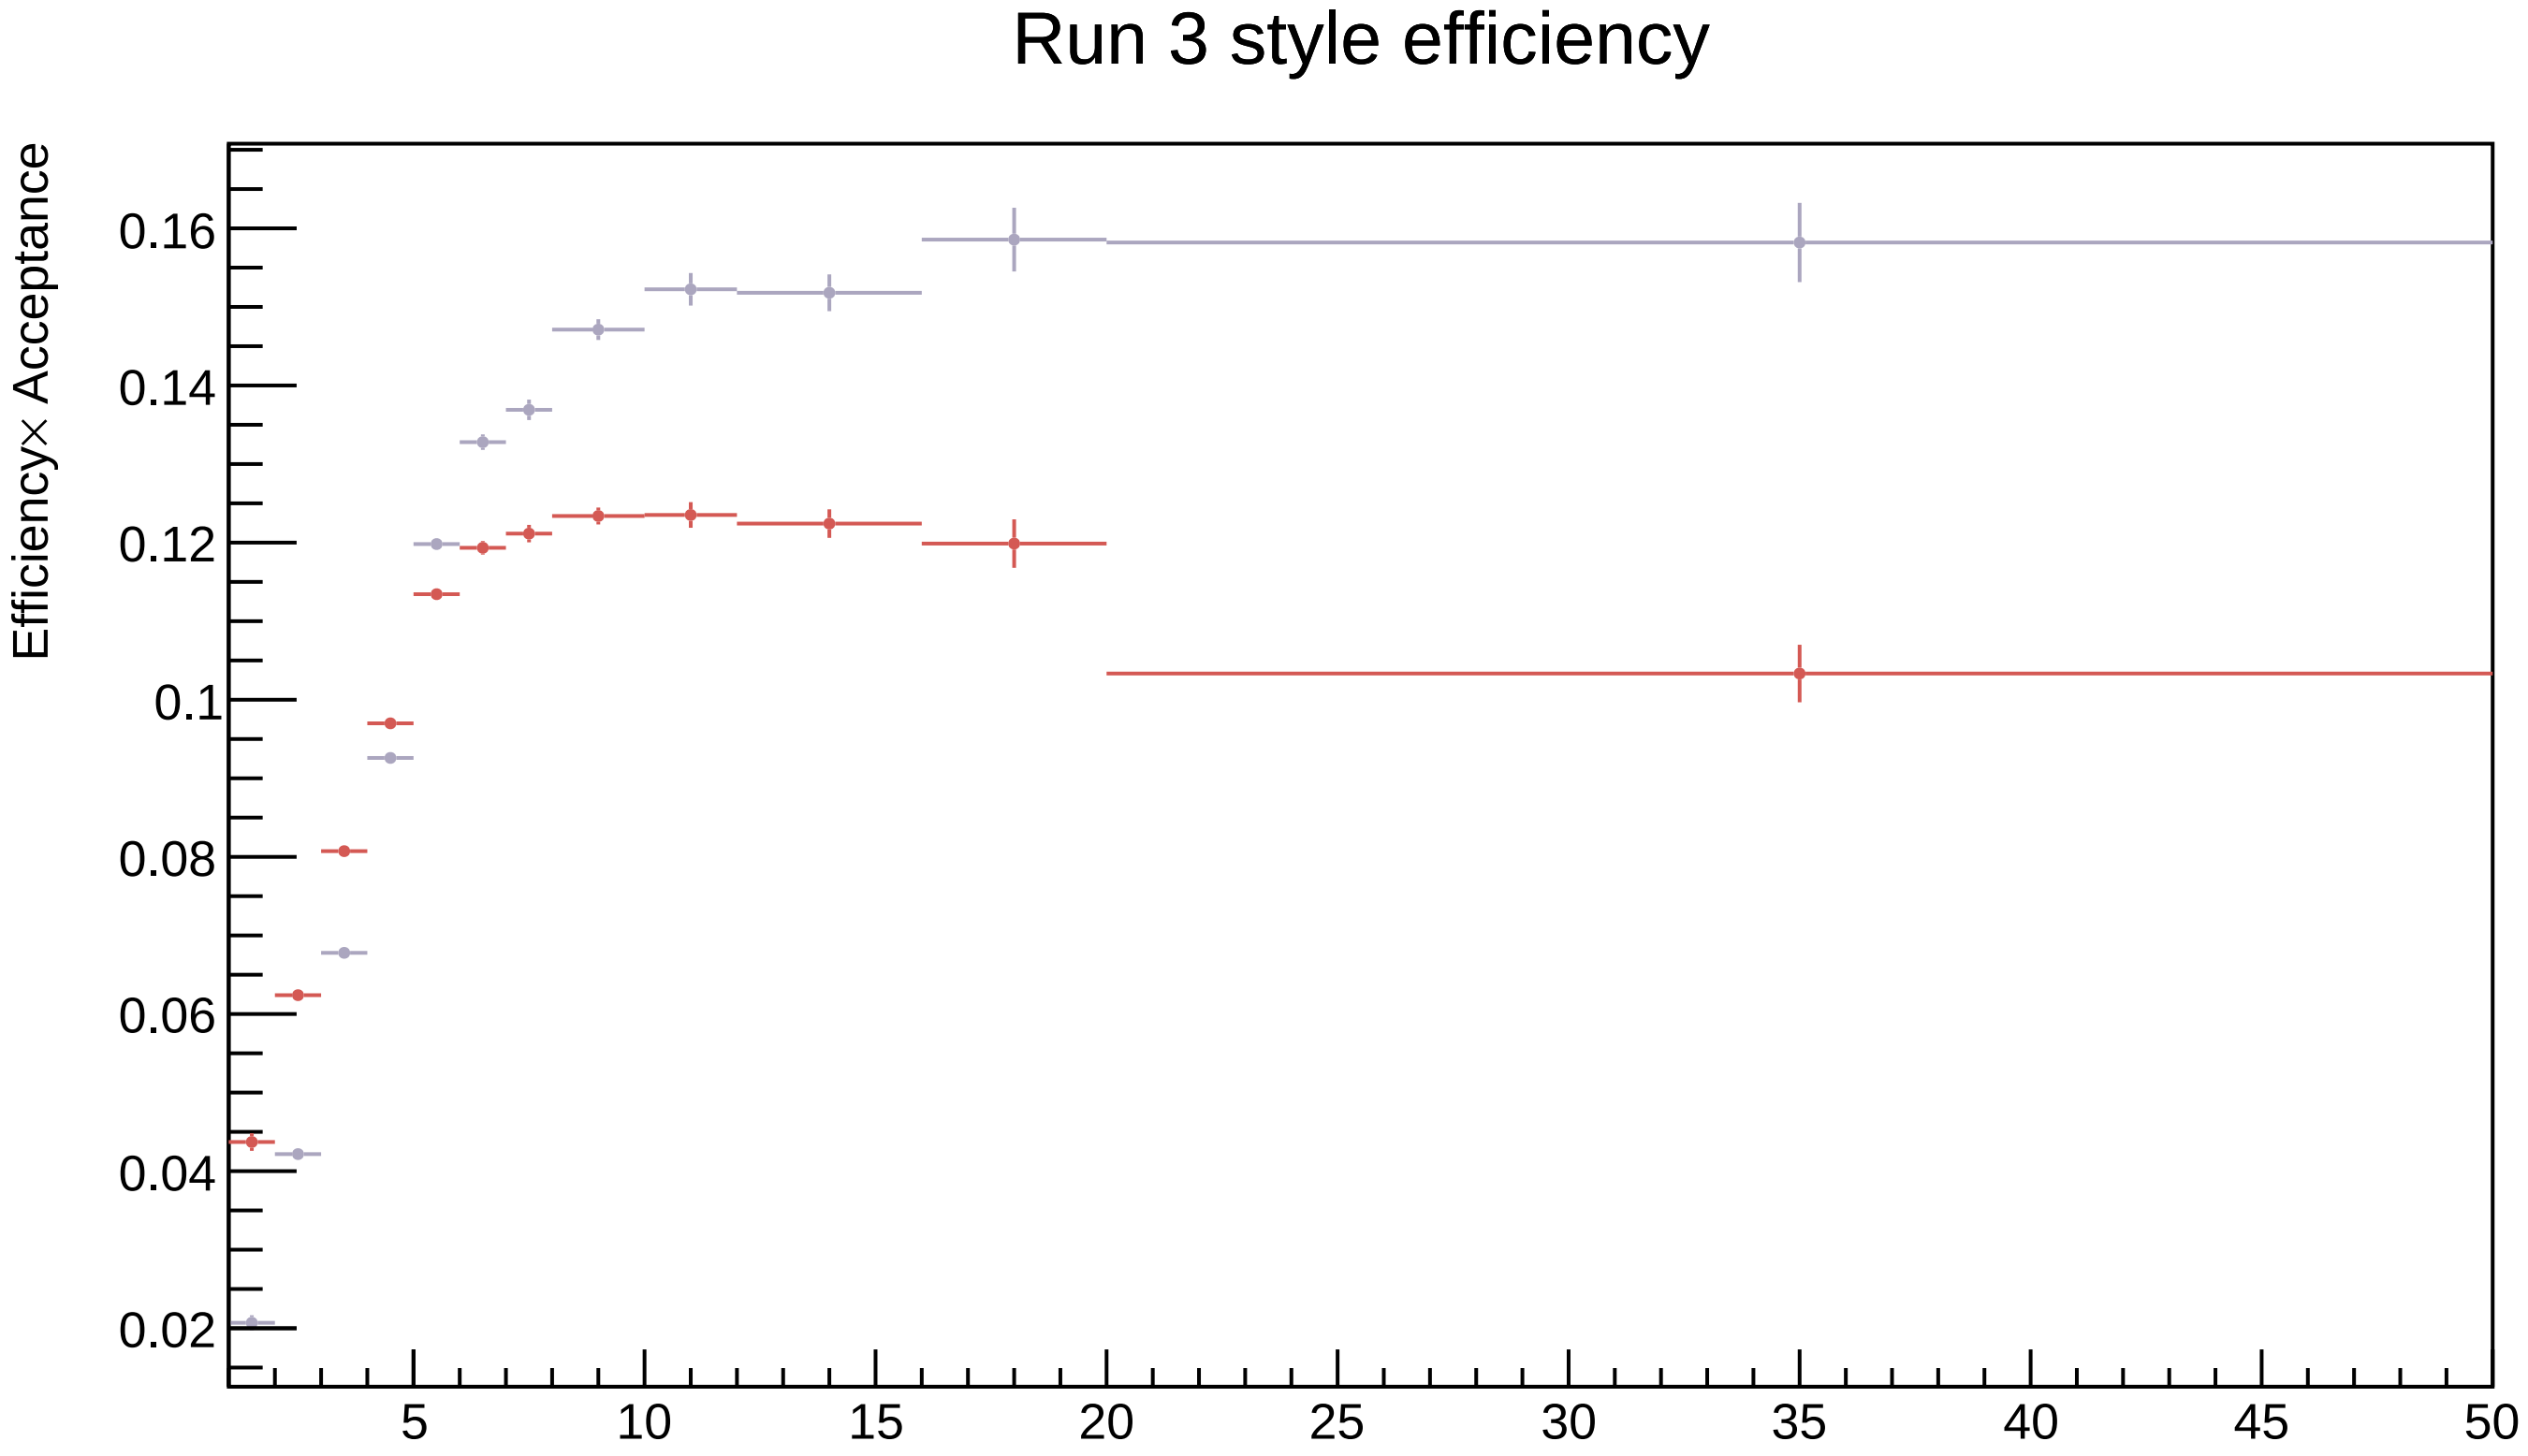

Run 3 style efficiency
Efficiency× Acceptance
0.16
0.14
0.12
0.1
0.08
0.06
0.04
0.02
5
10
15
20
25
30
35
40
45
50

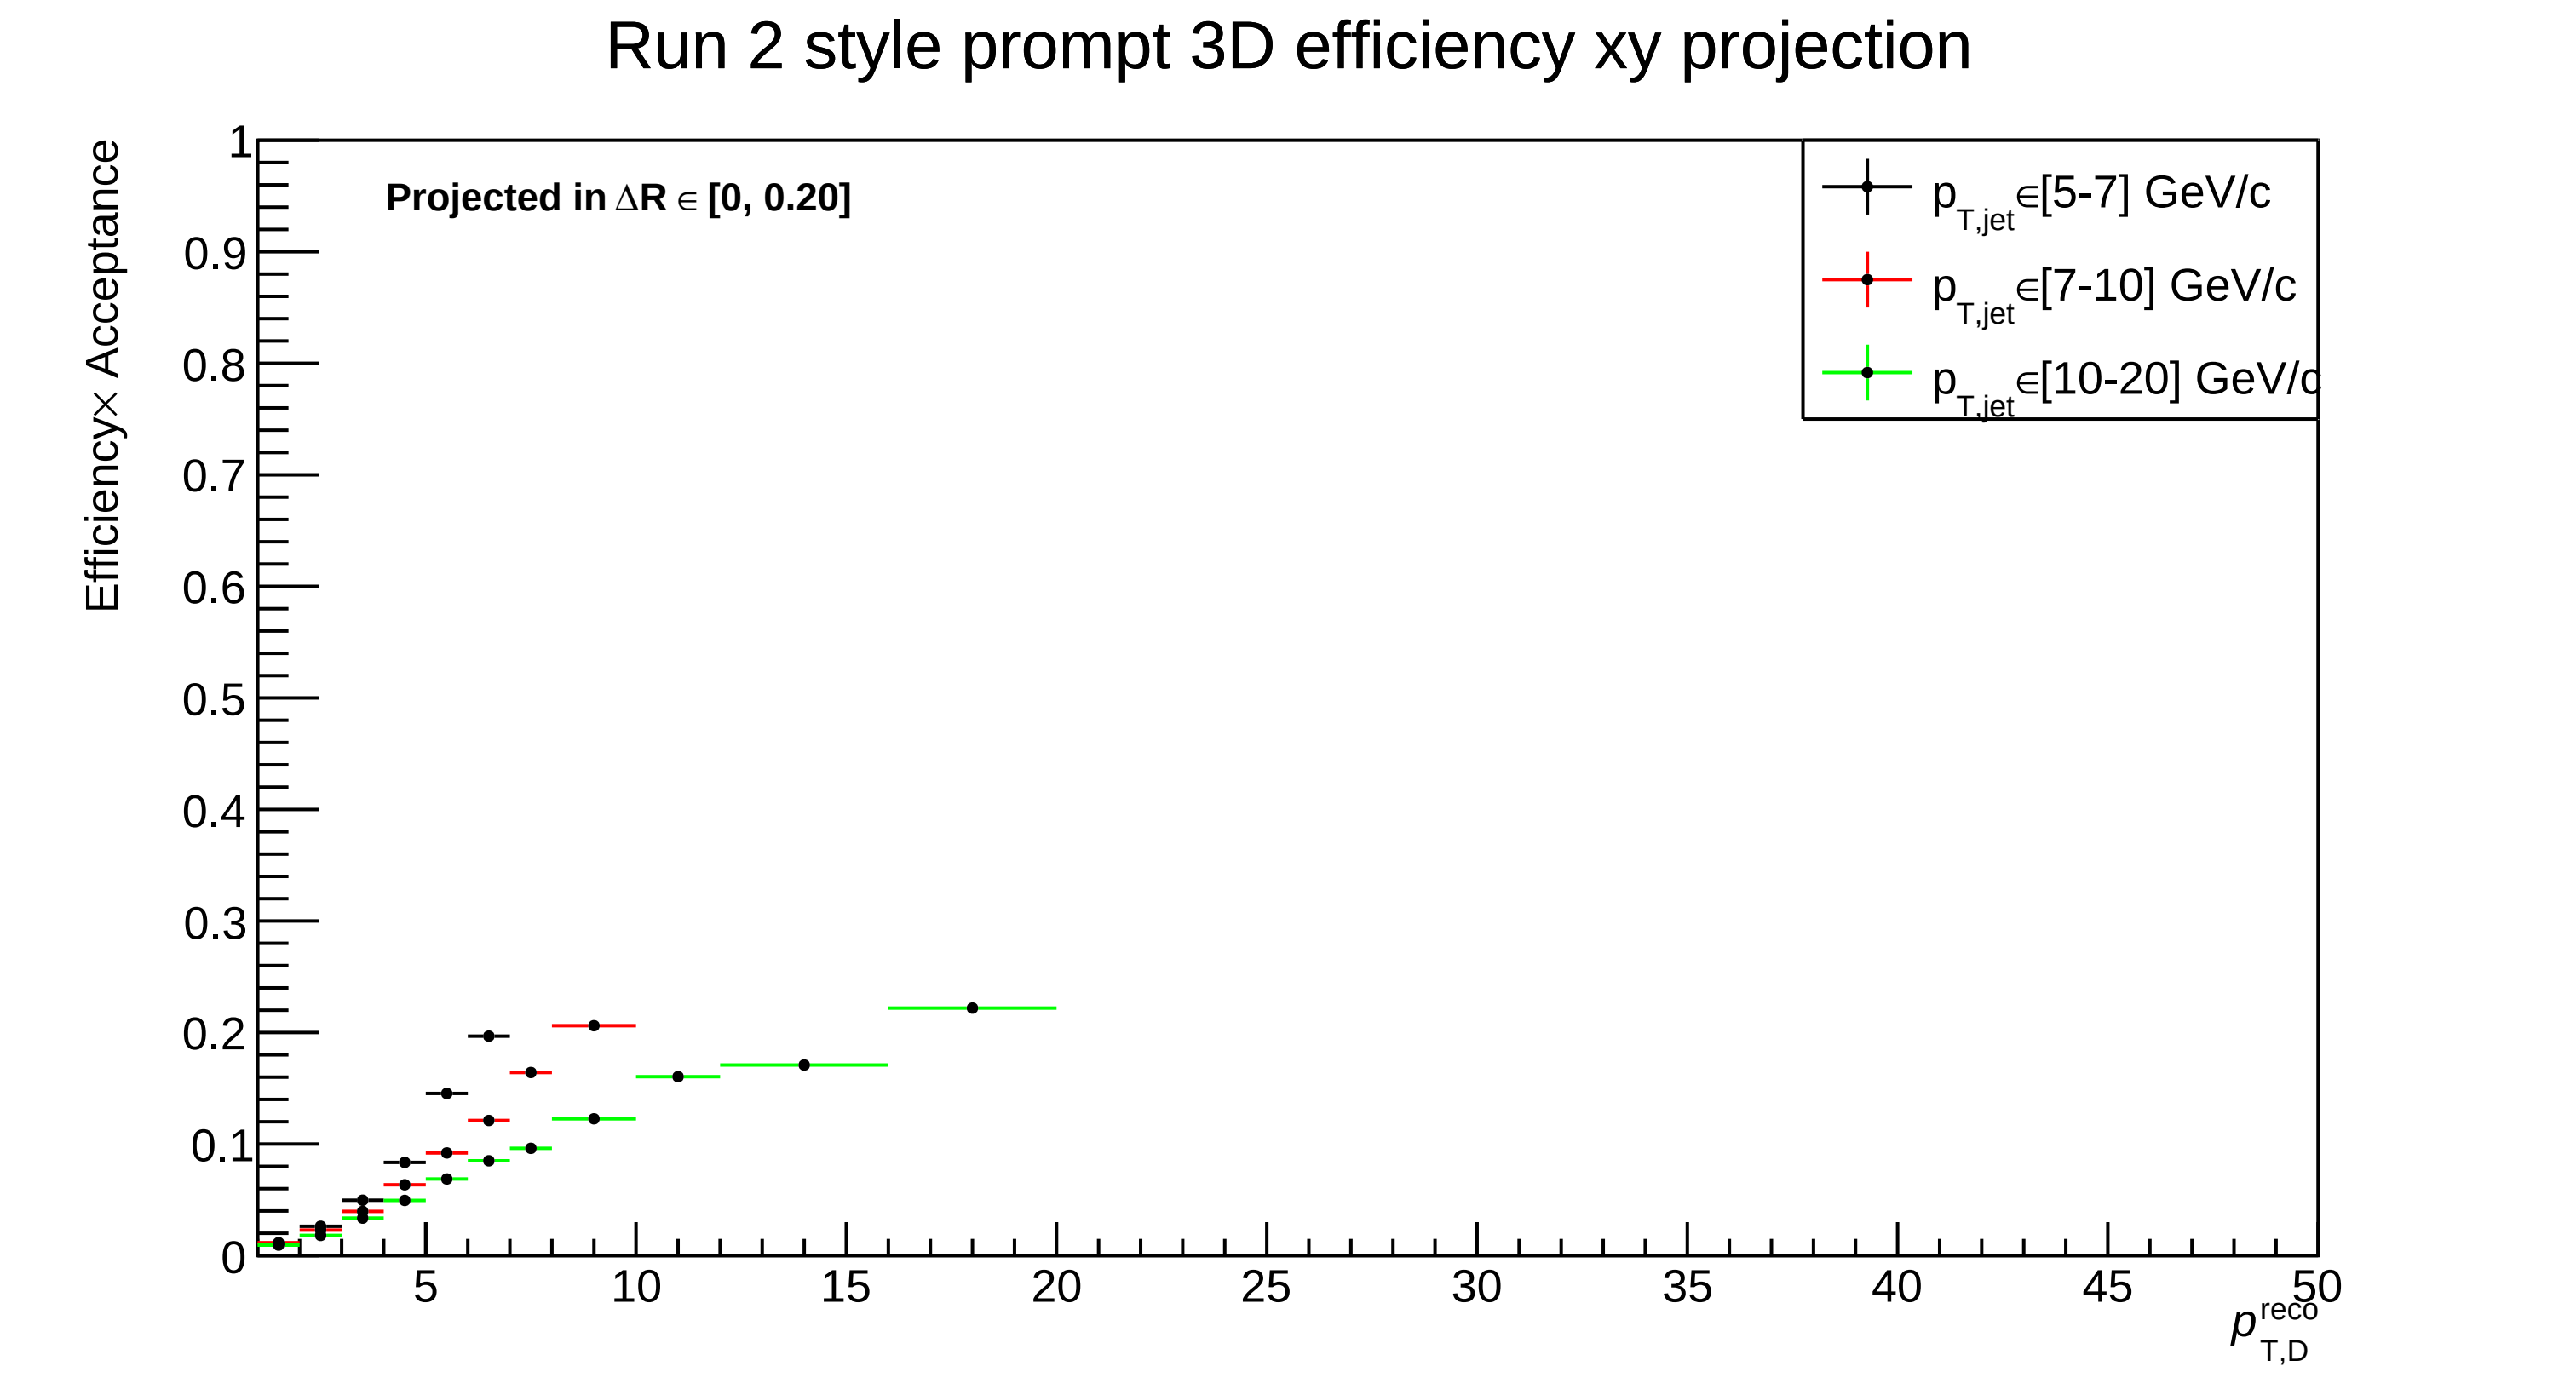

Run 2 style prompt 3D efficiency xy projection
Efficiency× Acceptance
Projected in ΔR ∈ [0, 0.20]
p_T,jet∈[5-7] GeV/c
p_T,jet∈[7-10] GeV/c
p_T,jet∈[10-20] GeV/c
p_T,D^reco
0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1
5
10
15
20
25
30
35
40
45
50

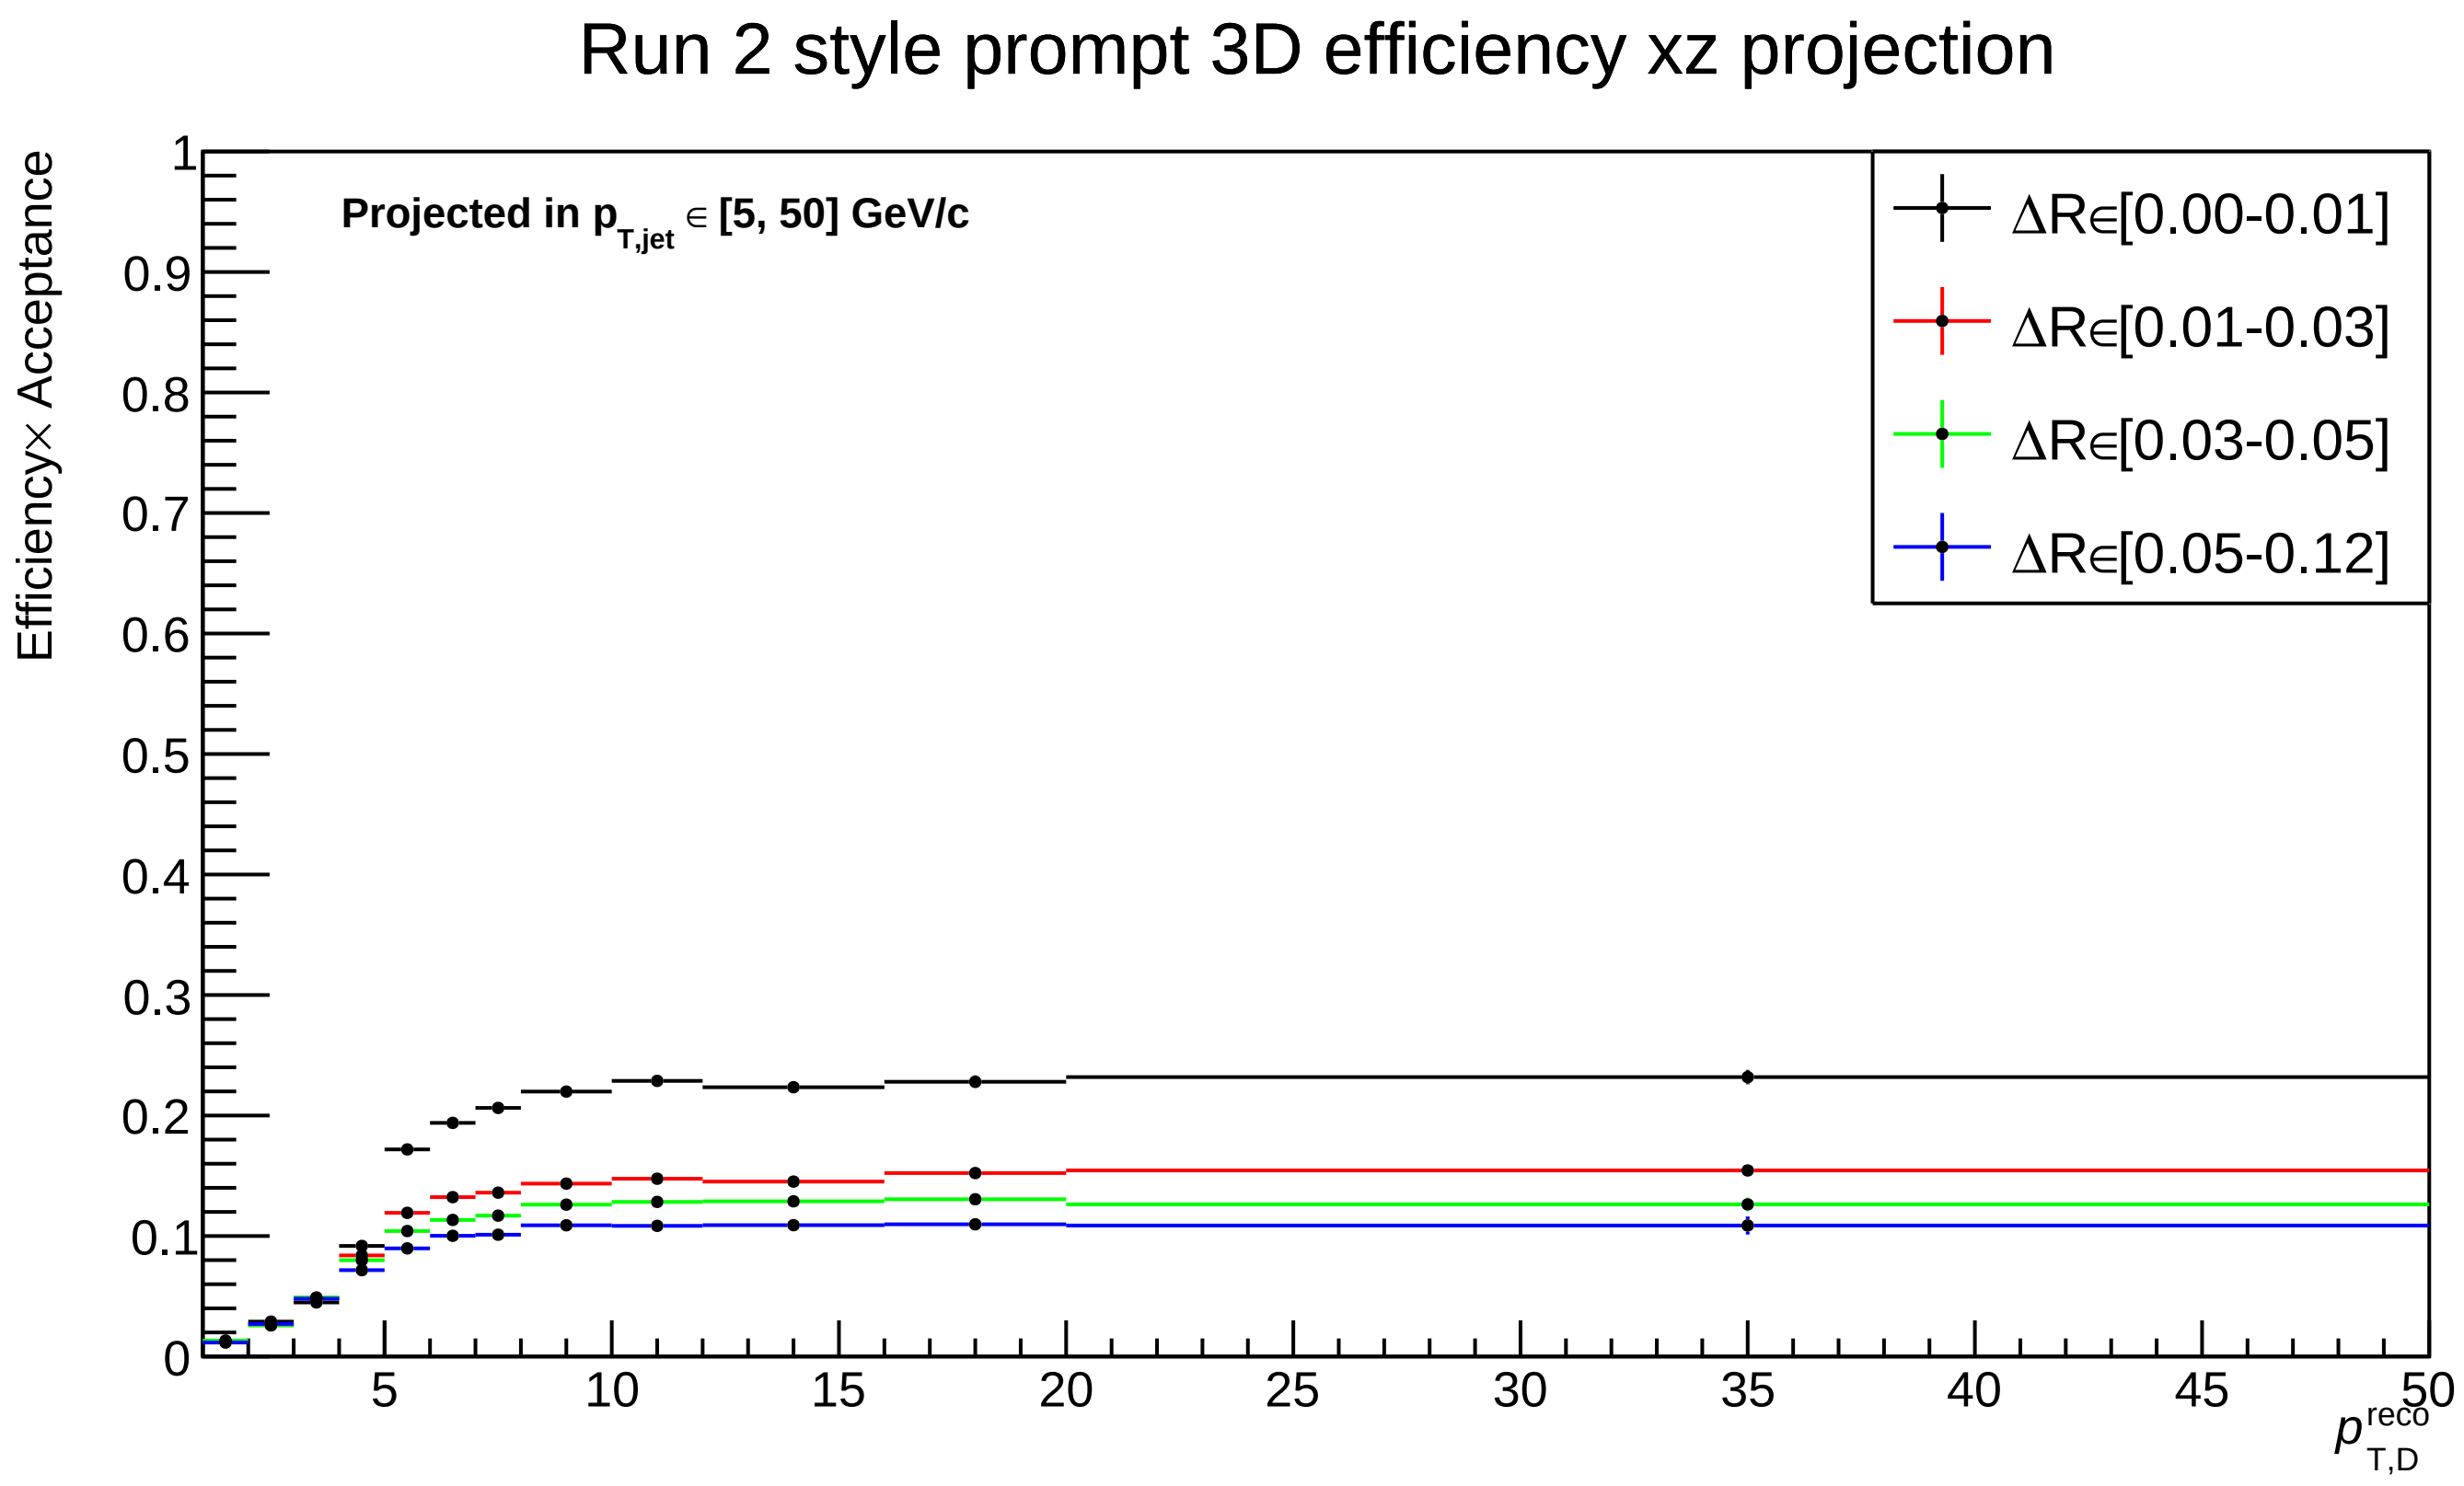
Run 2 style prompt 3D efficiency xz projection
Projected in $p_{T,jet} \in [5, 50]$ GeV/c
$\Delta R \in [0.00-0.01]$
$\Delta R \in [0.01-0.03]$
$\Delta R \in [0.03-0.05]$
$\Delta R \in [0.05-0.12]$
Efficiency× Acceptance
$p_{T,D}^{reco}$
0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1
5
10
15
20
25
30
35
40
45
50