

# An exploration of the double slit experiment with different width slits and sound waves

## **Abstract**

Young's Double Slit experiment is a well known investigation in quantum physics, but is traditionally performed using two slits of equal width, and uses the small wavelength of light to its advantage, e.g. by performing approximations, to yield a simple yet reliable theory of interference. This paper attempts to explore the experiment using sound waves, that do not have such small wavelengths, and also attempts to generalise the theory further to account for differing slit widths rather than restricting itself to two slits of the same width.

Word count: 3705 (excluding appendices)

# Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Wave behaviour</b>  | <b>4</b>  |
| 1.1      | Wave interference . . . . .  | 4         |
| 1.2      | Wave diffraction . . . . .   | 8         |
| <b>2</b> | <b>The standard Double Slit Theory</b>   | <b>10</b> |
| 2.1      | Zero intensity points . . . . .  | 10        |
| 2.2      | Constructive interference . . . . .  | 13        |
| <b>3</b> | <b>Finding an expression for the distances from the slits to a given point</b> | <b>13</b> |
| <b>4</b> | <b>Finding an expression for the phase shift at a given point</b>              | <b>16</b> |
| <b>5</b> | <b>Generalised formula for the intensity at any point</b>                      | <b>17</b> |
| <b>6</b> | <b>Comparing the theory to experimental results</b>                            | <b>20</b> |
| 6.1      | The experiment . . . . .   | 20        |
| 6.2      | Experimental results . . . . .   | 22        |
| 6.2.1    | A note on precision and confirmation bias . . . . .                            | 23        |
| 6.2.2    | Graphs . . . . .   | 24        |
| <b>7</b> | <b>Accounting for diffraction</b>  | <b>29</b> |
| 7.1      | Deriving expressions for $d_a(i)$ and $\phi_a(i)$ . . . . .                    | 31        |
| 7.2      | Further derivation . . . . .   | 33        |

|   |           |
|---|-----------|
| 7.3 Evaluation of the diffraction-including model . . . . . | 35        |
| <b>References</b>   | <b>37</b> |
| <b>Appendices</b>   | <b>A1</b> |
| <b>A Code for computer simulations</b>                      | <b>A1</b> |
| A.1 Code for diffraction-free model . . . . .               | A1        |
| A.2 Code for diffraction-including model . . . . .          | A16       |
| <b>B Evaluation of intensity integral</b>                   | <b>B1</b> |
| <b>C Plots of diffraction-including model</b>               | <b>C1</b> |


# 1 Wave behaviour

In this section we introduce two basic characteristics of wave behaviour: **interference** and **diffraction**.

## 1.1 Wave interference


**Waves** are a simple and useful mathematical concept used by physicists to describe natural phenomena. Often, we use waves when something is oscillating or periodic, or when it exhibits such behaviours as **interference** or **diffraction**. We usually represent e.g. light, sound, etc. as sine waves. Below a sine wave is shown:

**Figure 1:** A sine wave

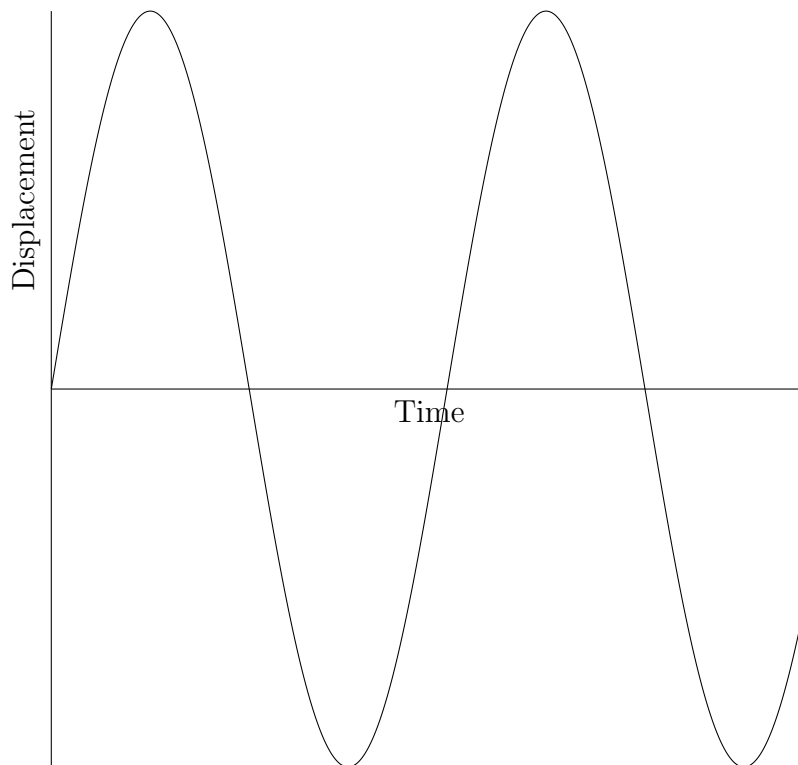

The sine wave in **Figure 1** could represent a sound wave, for example. Let us see what happens if we attempt to add two waves. For this text, we will only discuss adding waves of the same wavelength. Below is a figure showing two sine waves (blue and red) that are in phase, and the resultant wave (in green):

**Figure 2:** Superposition of waves

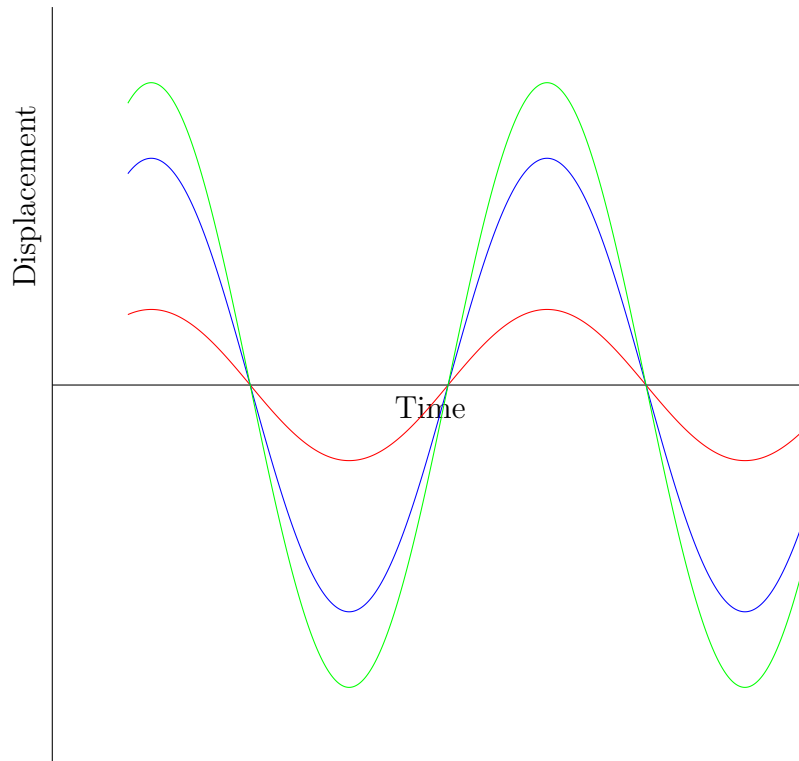

As we see from the figure above, the two waves have added together to create a bigger wave! This is known as **constructive interference**. Of course, if we shift a wave over by a phase shift of  $2n\pi, n \in \mathbb{Z}$ , or shift it over by a path difference of  $n\lambda$ , then the wave will be identical. Thus, in order to have constructive interference at any point, we have the criteria


$$\Delta x = n\lambda,$$

where  $\Delta x$  is the path difference between the two waves.

Note that the phase shift  $\phi$  between two waves is given by

$$\phi = \frac{2\pi}{\lambda} \Delta x, \quad (1)$$

where  $\Delta x$  is their path difference. Now, if we shift one wave over by an angle of  $\pi$ , then the waves will add together to form a smaller wave:

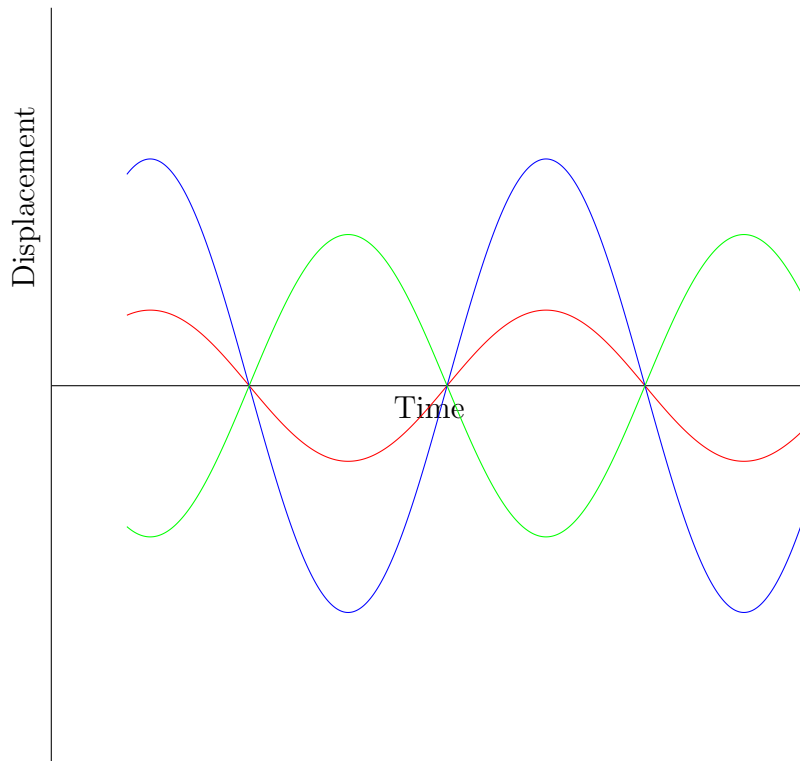

In this case, we see that we end up with a wave with a smaller amplitude once we add the two waves together. If the two waves had the same amplitude, they would completely cancel each other out! This is known as **destructive interference**.

## 1.2 Wave diffraction

We know from everyday experiences that we can hear around corners, but not see around corners. Why is this? We can explain this using the concept of **wave diffraction**. Diffraction occurs whenever a wave encounters an obstacle, like a corner. The waves ‘bend’ around the corners of the obstacle. Below is an image showing water waves diffracting in a ripple tank:



**Figure 3:** Water waves diffracting in a ripple tank



Source: <http://labman.phys.utk.edu/phys222core/modules/m9/images/misc3a.jpg>

It is known that diffraction only occurs when the width of the obstacle is


comparable to the wavelength of the wave.

## 2 The standard Double Slit Theory

### 2.1 Zero intensity points

One of the most important parts of the standard Double Slit theory is the formula for finding the points at which the total intensity is zero. occurs. The formula relies on the fact that the path difference  $\Delta x$  to any point on the screen from the two slits can be well approximated by  $\Delta x = \frac{1}{2}D \sin \theta$ . (See **Figure 4** below)

**Figure 4:** Double slit experiment with two slits of equal width

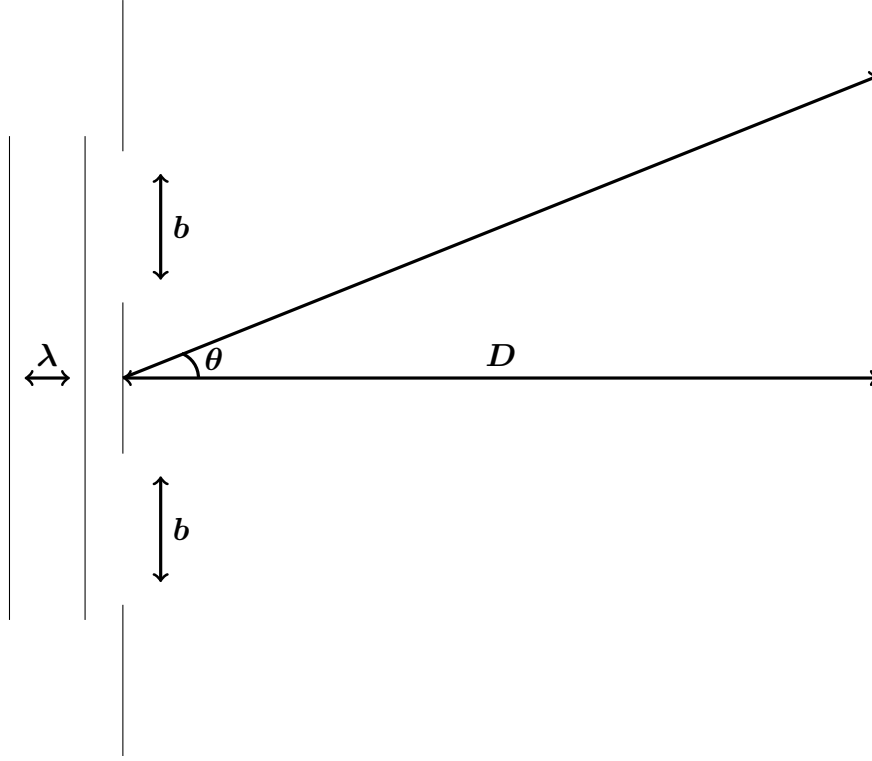

The Double Slit Theory relies on the fact that the angle to any given point on the screen from both slits is approximately the same, because the distance  $D$  to the screen is much greater than the distance between the slits. However, when waves with larger wavelengths, e.g. sound waves, are used, this approximation is no longer justified. Therefore, this investigation will use a different method, and, as will be seen later, will rely on the widths of the slits and the width of the object separating them instead. Let  $\omega$  be the angular frequency of the waves. By virtue of the relationship  $v = \lambda \frac{\omega}{2\pi}$ , it is trivial to see that  $\omega = 2\pi \frac{v}{\lambda}$ , where  $v$  is the propagation speed of the waves.

Since the two slits have equal widths, the amplitudes of the waves emitted from both slits are equal. If the wavelength of the waves used is much larger than the slit widths, the effects of diffraction will be negligible, and so the superposition  $S$  of the two waves can be modelled by the equation

$$S = \sin \omega t + \sin(\omega t + \phi). \quad (2)$$

The phase shift  $\phi$  is given by  $\phi = \frac{2\pi}{\lambda}\Delta x$ , and zero intensity requires  $S = 0$  for all  $t \in \mathbb{R}$ , hence we have

$$\phi = (2n - 1)\pi, n \in \mathbb{Z} \implies \frac{1}{2}D \sin \theta = \frac{(2n - 1)\lambda}{2},$$

which implies

$$D \sin \theta = (2n - 1)\lambda \quad (3)$$

This is the famous *Double Slit Formula*. However, there is an issue, as the model in (2) is a simplification: it does not account for the fact that the path difference of the two slits to the point will have an impact on the amplitudes of the two waves; the waves emitted from the slit closer to the point will have a larger amplitude. Of course, when the experiment is performed with light, this path difference is negligible compared to the distance to the screen, but when performed with e.g sound waves, it is no longer negligible, and must be taken into consideration.

## 2.2 Constructive interference

Another important part of the Double Slit Theory is the position of the points at which total constructive interference occurs. Modifying the *Double Slit Formula* (3), we obtain the condition

$$D \sin \theta = 2n\lambda. \quad (4)$$

However, once again, this formula does not generalise to waves with larger wavelengths and/or slits with differing widths. Using the formula for the phase shift from (1) and the condition  $\phi = 2n\pi$ , we obtain the condition

$$|d_b - d_a| = n\lambda. \quad (5)$$

## 3 Finding an expression for the distances from the slits to a given point

We will use the *Law of inverse squares* (Berg 2018), and assume that the amplitude is inversely proportional to the square of the distance from the source to the screen. Let  $d_a$  and  $d_b$  be the distances from the slits to the screen. Let the two slits have widths  $A$  and  $B$ . The distance from the slits to the screen is  $D$ . The width of the separator between the slits is  $S$ , and the wavelength of the waves is  $\lambda$ . (See **Figure 5** below)

Diagram illustrating the geometry of a double-slit interference experiment. Two slits, A and B, are separated by a distance  $S$ . A point P is located at a horizontal distance  $D$  from the central axis and a vertical distance  $y$  from slit A. The path lengths from the slits to point P are  $d_a$  (red line) and  $d_b$  (blue line). The wavelength of the light is  $\lambda$ .

$$S = \frac{1}{d_a^2} \sin \omega t + \frac{1}{d_b^2} \sin(\omega t + \phi), \quad (6)$$

14

widths  $A$  and  $B$  respectively, and the model becomes

$$S = \frac{A}{d_a^2} \sin \omega t + \frac{B}{d_b^2} \sin(\omega t + \phi). \quad (7)$$

The distance from the top of slit  $A$  to the bottom of slit  $B$  is given by

$$A + B + S.$$

Therefore, the distance from the top of slit  $A$  to the midpoint of the two slits is

$$\frac{A + B + S}{2}. \quad (8)$$

Subtracting the distance from the top of slit  $A$  to the middle of slit  $A$  ( $\frac{A}{2}$ ) gives the distance from the middle of slit  $A$  to the midpoint of the two slits:

$$\frac{A + B + S}{2} - \frac{A}{2} = \frac{B + S}{2}.$$

Subtracting the above from  $y$  gives the length of one of the sides of the red triangle, the other having length  $D$ . Hence,  $d_a$  is given by

$$d_a = \sqrt{D^2 + \left(y - \frac{B + S}{2}\right)^2}. \quad (9)$$

The distance from slit  $B$  to the point can be found likewise, but adding instead of subtracting:

$$d_b = \sqrt{D^2 + \left(y + \frac{A+S}{2}\right)^2}. \quad (10)$$

## 4 Finding an expression for the phase shift at a given point

If the path difference  $\Delta x$  of two waves and their wavelength  $\lambda$  is known, it is easy to find their phase shift:

$$\phi = \frac{2\pi}{\lambda} \Delta x.$$

In the last section, the distances  $d_a$  and  $d_b$  from the slits  $A$  and  $B$ , respectively, to a given point were found. Then, the path difference is simply given by

$$\Delta x = |d_b - d_a|,$$

which, when incorporating the results from (9) and (10), yields

$$\Delta x = \left| \sqrt{D^2 + \left(y + \frac{A+S}{2}\right)^2} - \sqrt{D^2 + \left(y - \frac{B+S}{2}\right)^2} \right|$$

Then, using the formula from (1), we obtain



$$\phi = \frac{2\pi}{\lambda} \left| \sqrt{D^2 + \left(y + \frac{A+S}{2}\right)^2} - \sqrt{D^2 + \left(y - \frac{B+S}{2}\right)^2} \right| \quad (11)$$

## 5 Generalised formula for the intensity at any point

It would certainly be interesting to derive a formula for the intensity at any given point. To obtain the total intensity, we will add the amplitudes contributed by both slits, and square the total amplitude. Since intensity is proportional to the square of amplitude, and we are only interested in relative/arbitrary units, this is a legitimate method of obtaining the intensity.

The amplitude coming from the slit with width  $A$  a distance  $d_a$  away from the point will contribute a wave

$$wave_a = \frac{A}{d_a^2} \sin \omega t.$$

Likewise, the other slit, with a width of  $B$  a distance  $d_b$  away from the point will contribute a wave

$$wave_b = \frac{B}{d_b^2} \sin(\omega t + \phi).$$

So, adding them together, the superposition  $S$  is given by

$$S = \frac{A}{d_a^2} \sin \omega t + \frac{B}{d_b^2} \sin(\omega t + \phi). \quad (12)$$

Consider a wave that is a sum of waves of the same wavelength and phase. If we double the amplitude of the wave, then the particles' displacement will change **twice** as quickly, and thus, the wave's energy will change **four** times as quickly. Then, trivially, it will also change four times as quickly on average, and thus the intensity has quadrupled. So, we say that a wave's intensity is proportional to the square of its amplitude. The core of the argument is that the wave's **rate of change of energy** is proportional to the square of its **displacement**, and thus the intensity is proportional to the **average** of the square of the displacement of the wave. If all the parts of the wave are in phase, we can extend that and say that intensity is proportional to the amplitude of the wave since the square amplitude will indeed be proportional to the average square displacement.

Now, consider a wave that is the sum of waves of the same wavelength but **different phase**. Then, we use the same argument: The rate of change of energy will be proportional to the particles' displacement. Then,

Squaring the above expression in (12) gives the rate of change of energy  $I(t)$  at a given point at a specific time:

$$I(t) = \left( \frac{A}{d_a^2} \sin \omega t + \frac{B}{d_b^2} \sin(\omega t + \phi) \right)^2. \quad (13)$$

Notice, however, that  $I(t)$  seems to vary with time. So, we will find the

average intensity  $I$  over one full period. During one period,  $\omega t$  goes from 0 to  $2\pi$ . Therefore,  $t$  goes from 0 to  $\frac{2\pi}{\omega}$ , and hence, we need to find the average intensity with respect to time over the interval  $[0, \frac{2\pi}{\omega}]$ . The average value of some function  $f$  over some interval  $[x_0, x_1]$  can be calculated by dividing the area under the curve on that interval by the length of the interval. So, the intensity at a given point will be given by

$$I = \frac{\omega}{2\pi} \int_0^{2\pi/\omega} \left( \frac{A}{d_a^2} \sin \omega t + \frac{B}{d_b^2} \sin(\omega t + \phi) \right)^2 dt. \quad (14)$$

This integral is evaluated in **Appendix B**.

Now, using the derivation from **Appendix B**, we obtain the following expression for the intensity:

$$\begin{aligned} I &= \frac{\omega}{2\pi} \left[ \frac{A^2}{d_a^4} \times \frac{\pi}{\omega} + \frac{2AB}{d_a^2 d_b^2} \times \frac{\pi}{\omega} \cos \phi + \frac{B^2}{d_b^4} \times \frac{\pi}{\omega} \right] \\ &= \frac{1}{2} \left[ \frac{A^2}{d_a^4} + \frac{2AB}{d_a^2 d_b^2} \cos \phi + \frac{B^2}{d_b^4} \right]. \end{aligned}$$

However, since we are using arbitrary units, the factor of  $\frac{1}{2}$  is of no importance, so we can obtain the formula

$$I = \frac{A^2}{d_a^4} + \frac{2AB}{d_a^2 d_b^2} \cos \phi + \frac{B^2}{d_b^4}.$$

However, this assumes that the waves are formed at the slits. In reality, the waves are formed first at the source, and then reformed at the slits due to diffraction. Let the perpendicular distance from the source to the slits be

$k$ . Then, assuming the waves had an initial amplitude  $A_{initial}$  at the source, once they reach the slits, they will have an amplitude  $\frac{A_{initial}}{k^2}$ , due to the *Law of Inverse Squares* (Berg 2018). Incorporating this into the expression for intensity above gives

$$I = \frac{1}{k^2} \left( \frac{A^2}{d_a^4} + \frac{2AB}{d_a^2 d_b^2} \cos \phi + \frac{B^2}{d_b^4} \right). \quad (15)$$

## 6 Comparing the theory to experimental results

To test the theory, sound waves were used. It was expected that the theory would fit the experimental well when the wavelength used was much larger than the slit widths (corresponding to a low frequency), and that they would not agree very well when the wavelength used was not much larger than the slit widths.

### 6.1 The experiment

A single speaker was placed in a classroom, a distance  $k$  away from a doorway of width 87.5 cm. In practice,  $k$  was never varied; it was kept constant at 244 cm. (A 1 metre ruler was used for all distance measurements) A tall (taller than the doorway) piece of cardboard was used to define the slits. It was approximately 9 cm wide. By placing the cardboard such that its centre

was in the centre of the doorway, two slits of equal width could be produced; moving it to the left or to the right would make one slit larger than the other; single slit experiments were performed by not using the cardboard at all. Unfortunately, it was difficult to find a suitable location for the experiment that allowed for a screen like in the model. Instead, the sound intensity was measured at a distance of 248 cm from the doorway. The first measurement was done 192 cm “to the right” of the midpoint, and measurements were made all the way to the midpoint, and then all the way to the point 192 cm “to the left” of the midpoint. On the floor, there were small white circular dots, with a spacing of 24 cm. This made it easy to measure the intensity at intervals of 24 cm. Using the relationship  $v = \lambda f \implies f = \frac{v}{\lambda}$ , where  $v = 340 \text{ m s}^{-2}$ , it was trivial to calculate which frequency of sound to use. Once the frequency had been determined, an online tone generator (Szynalski n.d.) was used to send monochromatic (only one wavelength) sound waves through the doorway. A mobile app (Abc Apps 2018) was used to record the sound intensity. However, the mobile app used gave values in dB. According to (Georgia State University n.d.[a]),  $\beta$  dB is equivalent to an intensity  $I$  by the following equation:

$$\beta = 10 \log_{10} \frac{I}{I_0},$$

where  $I_0$ , the “standard threshold of hearing” is equal to  $10 \times 10^{-12} \text{ W m}^{-2}$  (Georgia State University n.d.[a]). Solving for  $I$  yields

$$I = I_0 \times 10^{\frac{\beta}{10}} \quad (16)$$

The measured dB values were converted to watts per square metre using the formula above, and then plotted against the distance from the midpoint. They were then normalised by dividing each intensity value by the maximum. For each measured value, a predicted value (according to the formula in (15)) was generated, and a graph was plotted from these values as well. Once again, the predicted values were normalised. The recorded dB values and their value after conversion to SI units were also recorded, along with the dB and SI values predicted, in a text file. The code used to evaluate the intensity formula in (15) from **Section 5** is given in **Appendix A.1**

## 6.2 Experimental results

Six cases in particular were tested. One single-slit experiment, one double-slit experiment with two slits of equal widths, and one experiment where one slit was twice as wide as the other. For two of these cases, the experiment was performed first with a wavelength approximately as large as the largest slit, and afterwards with a wavelength much larger than the largest slit width. The third case was only investigated with a large wavelength.

### 6.2.1 A note on precision and confirmation bias

Unfortunately, it has to be admitted that the results below most likely suffer from a severe case of confirmation bias and bad precision. There was a lot of background noise (construction work) present during the measurements, and there was never a time when the intensity reading ‘settled’ properly; the reading was fluctuating wildly, with a range of a few decibel. A fluctuation of a few decibel is in fact crushing when it is considered that the decibel difference between each consecutive measurement is also only a few decibel. When the experiment was conducted, the rough shape of double-slit and single-slit curves was known. So, when a choice had to be made whether the reading was e.g 61, 62, 63, or 64 dB (not actual values), I would be more likely to choose the reading that, relative to the previous readings so far in the trial, would best conform to the known shape. I also knew in advance what curve my model predicted. I knew that it didn’t include any maxima or minima except the central maxima. Thinking my model **should** be correct for large wavelengths, I might have ignored maxima or minima that were actually there. Or, conversely, during the trials with small wavelengths, I knew that there ‘were supposed to be other maxima/minima’. In hindsight, it would likely have been a better idea to collect experimental data first, and only then start working on the model. The reader will probably be surprised at how ‘nice’ the curves with small wavelengths look; This could be explained by the narrow range of values and confirmation bias.

Let us say two points have decibel readings  $\beta_1$  and  $\beta_2$  which correspond

to actual intensities  $I_1$  and  $I_2$  respectively. Let  $I_2/I_1 = a$ . Then, using the formula for decibels from (16), we have

$$\frac{I_1}{I_2} = a \implies \frac{I_0 \times 10^{\beta_1/10}}{I_0 \times 10^{\beta_2/10}} = a.$$

Solving for  $|\beta_1 - \beta_2|$ , the decibel difference, we get

$$|\beta_1 - \beta_2| = |10 \log a|.$$

In the first plot below, the central maximum has a relative intensity 1, and the first maximum to the right has an intensity 0.4. So, the ratio of these, using  $I_1 = 1, I_2 = 0.4$ , is  $5/2$ . Then, we get

$$|\beta_1 - \beta_2| \approx 4 \text{ dB}.$$


So, unless the reading was off by four decibel, the experimental results cannot be purely due to reading error.

### 6.2.2 Graphs

**One slit.** Below is a plot of the predicted results vs. the measured results for a small wavelength:




**Figure 6:** Single slit - Small wavelength

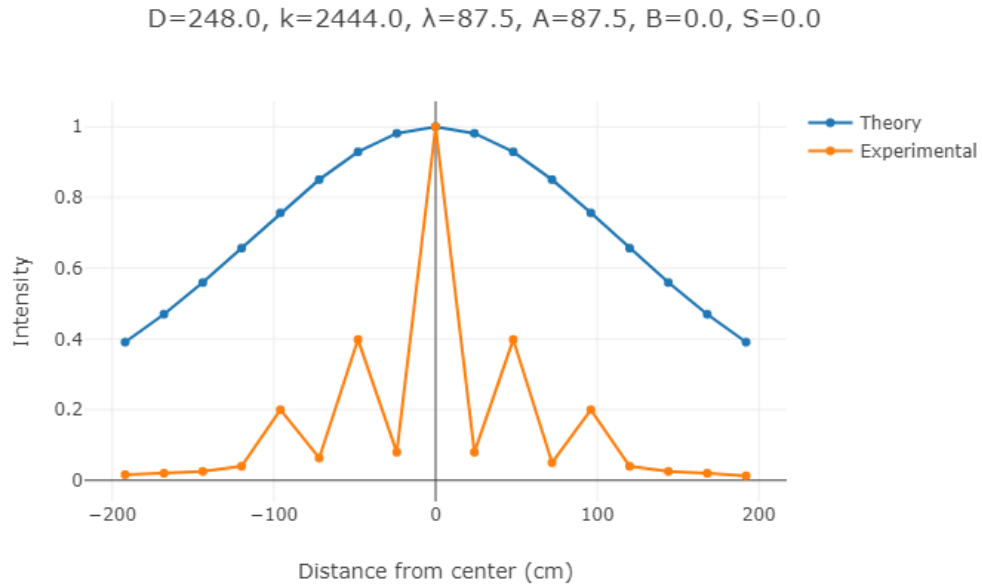

From the figure above, it can be seen that the theory does not fit the data. Now, let us compare theory and results when the wavelength is large:

**Figure 7:** Single slit - Large wavelength

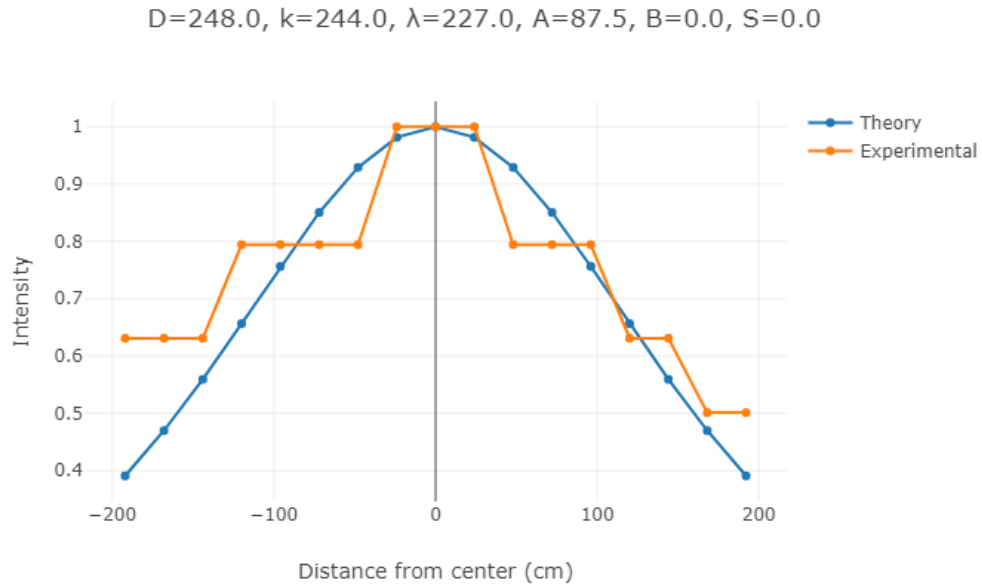


Clearly, in this case, the theory fit the measurements much better.

**Two slits of equal width.** Below is a plot of the predicted results vs. the measured results for a small wavelength:


**Figure 8:** Double slit - Small wavelength

$D=248.0$ ,  $k=244.0$ ,  $\lambda=39.0$ ,  $A=39.0$ ,  $B=39.0$ ,  $S=9.0$

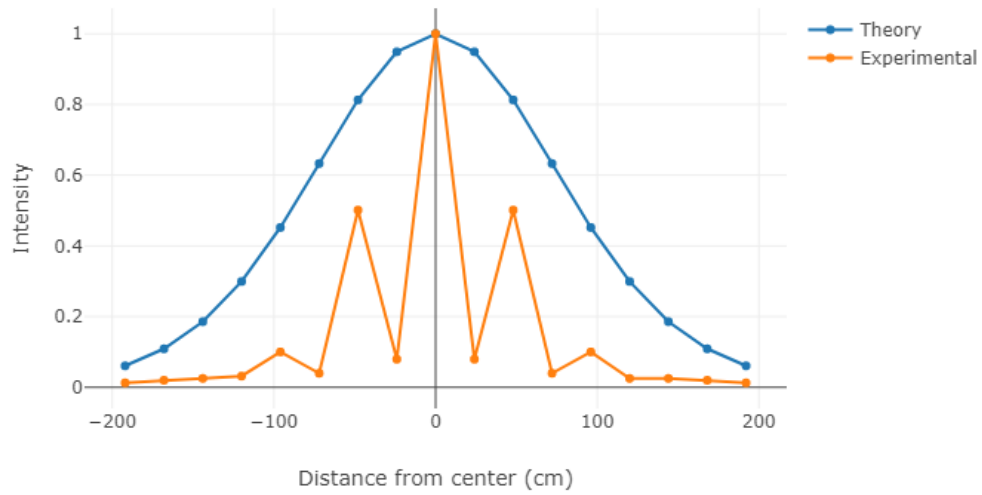

We can see that the theory most certainly does not fit the data. Now, let us compare the results for a large wavelength:


**Figure 9:** Double slit - Large wavelength

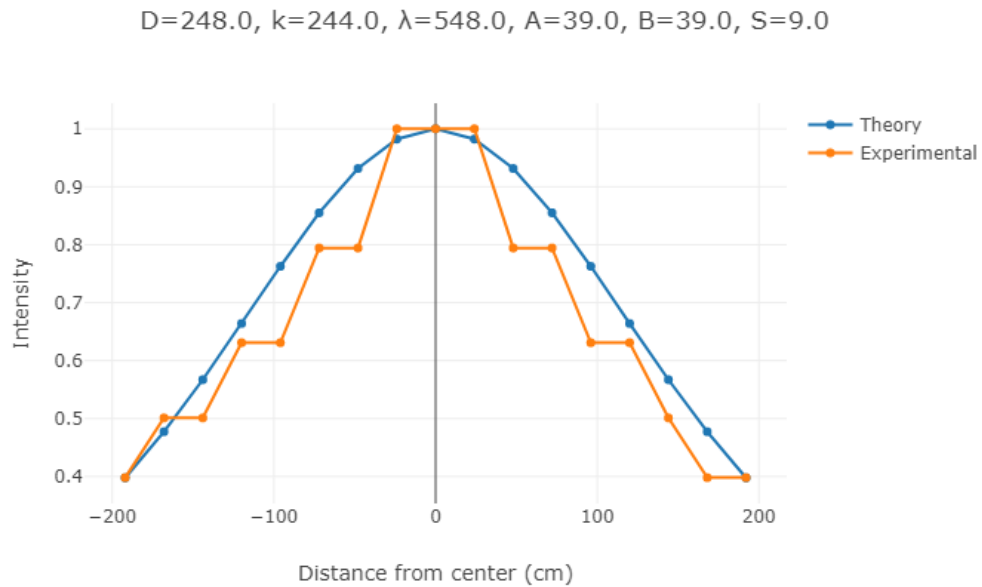

Once again, the theory is a much better fit when the wavelength is large.

**One slit twice as wide as the other.** Below are the results measured and the predicted results from the theory for two slits where one is twice as wide as the other:

**Figure 10:** One slit twice as wide as the other - Large wavelength

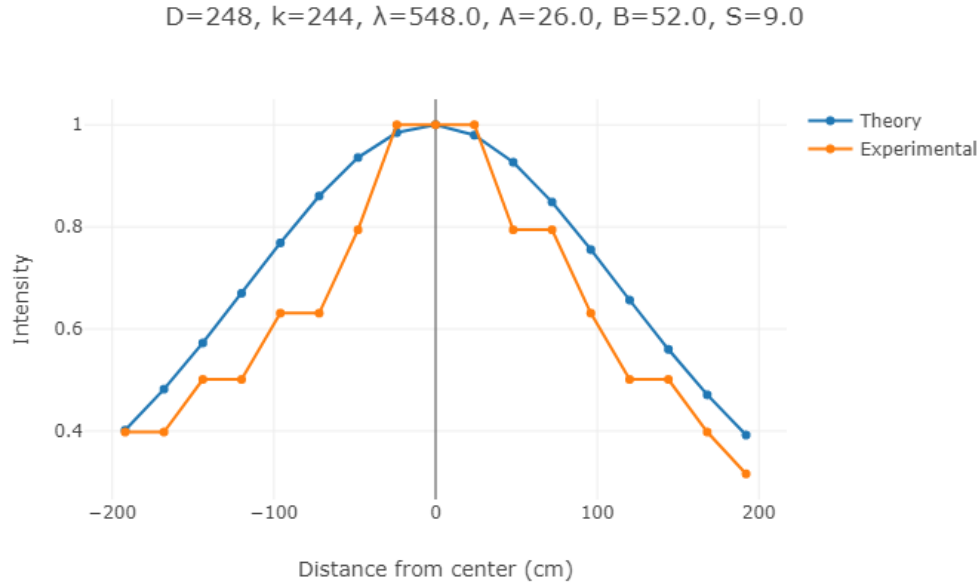

Once again, the theory fits the data well. In **Section 2.1**, we said that the theory we have now developed would only provide an accurate description of the intensity curve if the wavelength was large because then the effects of diffraction would be negligible. The results above seem to support this.

## 7 Accounting for diffraction

The intensity formula from (15) derived in **Section 5** only accounts for interference between the waves. It assumes the waves travel as plane waves from the source to the slits, and then spread out like a point source at the slits. In fact, as long as the wavelength is as large or larger than the slit

widths, then there will be a diffraction pattern as well. As discussed in **Section 5**, if the wavelength is much larger than the slit widths, the effects of diffraction can be ignored. We will not attempt to extend our theory to account for diffraction as well.

Huygens principle (Georgia State University n.d.[b]) states that to explain diffraction, we may assume that when a wave undergoes diffraction, every point on the wavefront acts as a circular point source; so there will be infinitely many circular point sources. To obtain an expression for the effect on intensity accounting for diffraction, we will assume that at the slits, the wave splits into  $n$  point sources, and let  $n$  go to infinity.

Let  $I_0$  be the amplitude of the wave as it enters the slits. Since we are using relative units, we will let  $I_0 = 1$  for simplicity. We will assume that the amplitude 1 will be spread evenly across the  $n$  point sources; then, each source will have amplitude  $\frac{1}{n}$ . The distance from the  $i$ th slit from slit  $A$  to the point will be some distance  $d_a(i)$ , and for slit  $B$  we will have a similar expression  $d_b(i)$ . Because  $d_a(i)$  and  $d_b(i)$  both will depend on  $i$ , there will be a specific phase shift for each of the sources. It does not make sense to talk about a ‘phase shift’ if we do not have a reference source. Arbitrarily, we choose the source in the middle of the slits to be the ‘in phase’, and call it the 0th slit, and assign phase shifts  $\phi_a(i)$  and  $\phi_b(i)$ , respectively, to the other point sources. The top slit will be the ‘ $-\frac{n-1}{2}$ th’ slit, i.e it will have  $i = -\frac{n-1}{2}$ , and the bottom slit will be the  $\frac{n-1}{2}$ th slit. Below we derive the resultant wave coming from slit  $A$  at a given point, and then it will be easy

to duplicate the derivation for slit  $B$ .

The wave  $\Lambda_i$  coming from the  $i$ th source from slit  $A$  will be given by

$$\Lambda_i = \frac{1}{n \times d_a^2(i)} \sin(\omega t + \phi_a(i)).$$


The resultant wave  $\Lambda(n)$ , written as a function of  $n$ , coming from slit  $A$  is given by the sum of these waves:

$$\Lambda(n) = \sum_{i=-\frac{n-1}{2}}^{\frac{n-1}{2}} \frac{1}{n \times d_a^2(i)} \sin(\omega t + \phi_a(i)). \quad (17)$$

Next, we will attempt to derive expressions for  $d_a(i)$  and  $\phi_a(i)$ .

## 7.1 Deriving expressions for $d_a(i)$ and $\phi_a(i)$

Recall the diagram from **Figure 5**:

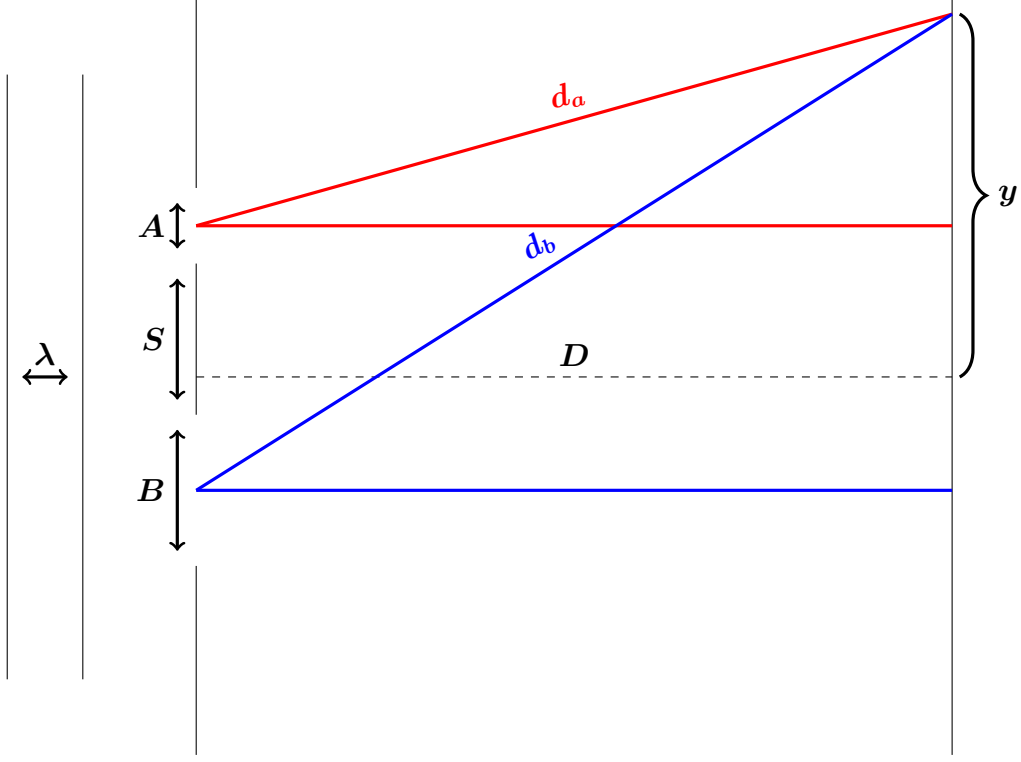

Straight away, we have  $d_a(0) = d_a$ , and we know from (9) that  $d_a$  is given by

$$d_a = \sqrt{D^2 + \left(y - \frac{B+S}{2}\right)^2}.$$

Here,  $D$  is the horizontal component of the distance, and  $y - \frac{B+S}{2}$  is the vertical component. At the  $i$ th source, the vertical distance will be  $y - \frac{B+S}{2} + \frac{iA}{n-1}$ . To verify this, plug in  $i = \frac{n-1}{2}$ , and we get a vertical distance of  $\frac{A+B+S}{2}$ , which we from (8) in **Section 3** know is the distance from the middle of slit  $A$  to the midpoint. Since the extra bit  $(\frac{iA}{n-1})$  is proportional to  $i$  as well, this is the correct expression to add on.



Thus,  $d_a(i)$  is given by

$$d_a(i) = \sqrt{D^2 + \left(y + \frac{iA}{n-1} - \frac{B+S}{2}\right)^2}. \quad (18)$$

Then, the path difference  $\Delta x_i$ , using source 0 as a reference, is given by

$$\Delta x_i = \left| \sqrt{D^2 + \left(y - \frac{B+S}{2}\right)^2} - \sqrt{D^2 + \left(y + \frac{iA}{n-1} + \frac{B+S}{2}\right)^2} \right|.$$

And the phase shift  $\phi_a(i)$  must then be given by

$$\phi_a(i) = \frac{2\pi}{\lambda} \left| \sqrt{D^2 + \left(y - \frac{B+S}{2}\right)^2} - \sqrt{D^2 + \left(y + \frac{iA}{n-1} + \frac{B+S}{2}\right)^2} \right|. \quad (19)$$

## 7.2 Further derivation

Using the fact that  $\phi = \frac{2\pi}{\lambda} \Delta x$ , and the formula from (17), we have

$$\Lambda(n) = \sum_{i=-\frac{n-1}{2}}^{\frac{n-1}{2}} \frac{1}{n \times d_a^2(i)} \sin \left( \omega t + \frac{2\pi}{\lambda} (d_a - d_a(i)) \right)$$

Notice we are not taking the absolute value of  $d_a - d_a(i)$ . This is intentional: A certain source above the middle source might be just as much out of phase as a certain slit below the middle, but they would be out of phase

in opposite directions. Therefore, we account for this by considering the sign of the path difference.

We will now take the limit as  $n$  goes to infinity, yielding the actual resultant wave  $\Lambda$  from slit  $A$ :

$$\Lambda = \lim_{n \rightarrow \infty} \sum_{i=-\frac{n-1}{2}}^{\frac{n-1}{2}} \frac{1}{n \times d_a^2(i)} \sin \left( \omega t + \frac{2\pi}{\lambda} (d_a - d_a(i)) \right).$$

Using precisely the same argument for slit  $B$ , we have the following expression for the resultant wave  $\beta$  coming from slit  $B$ :

Since  $n$  is constant with respect to  $i$ , we can move it outside the summation:

$$\Lambda = \lim_{n \rightarrow \infty} \frac{1}{n} \sum_{i=-\frac{n-1}{2}}^{\frac{n-1}{2}} \frac{1}{d_a^2(i)} \sin \left( \omega t + \frac{2\pi}{\lambda} (d_a - d_a(i)) \right).$$

$$\beta = \lim_{n \rightarrow \infty} \frac{1}{n} \sum_{i=-\frac{n-1}{2}}^{\frac{n-1}{2}} \frac{1}{d_b^2(i)} \sin \left( \omega t + \frac{2\pi}{\lambda} (d_a - d_a(i)) \right).$$

Then, the superposition  $S$  is given by

$$S = \Lambda + \beta.$$

We notice that displacement  $S$  of the resultant wave will be a function of  $t$ . To find the intensity, we will integrate the square of  $S$  from 0 to  $2\pi/\omega$  with respect to  $t$  and divide by  $2\pi/\omega$ :

$$I = \frac{\omega}{2\pi} \int_0^{2\pi/\omega} (\Lambda + \beta) dt.$$

The Python code used to evaluate this integral is given in **Appendix A.2**

### 7.3 Evaluation of the diffraction-including model

For all five of the trials conducted (see **Section 6.2**), the diffraction-including model gave very similar predictions to those of the diffraction-free-model from **Section 5**. The plots are included in **Appendix C**.

This was unexpected. As discussed earlier in the paper, we said that the diffraction-free model did not adhere to the experimental results for small wavelengths because of diffraction. But now we have a model that accounts for diffraction, and it predicts the same intensity distribution! Thus, we have two options:

- 1 The diffraction-including model is wrong. Either Huygen’s principle does not apply here, we applied it incorrectly, there is an error in the mathematics somewhere, or the code is wrong.
- 2 The measurements are incorrect.

It is of course possible that the model is wrong. Consider also, though, the note on confirmation bias from **Section 6.2.1**. It is possible that there really were no maxima or minima except the central maxima during the

trials with small wavelengths, but since I knew in advance that there ‘were supposed to be some’, my bias combined with the fluctuation of the readings lead the data to show them.

## References

- Abc Apps. (2018). Sound meter. Retrieved from <https://play.google.com/store/apps/details?id=com.gamebasic.decibel>
- Berg, R. E. (2018). Sound. Retrieved from <https://www.britannica.com/science/sound-physics/Circular-and-spherical-waves>
- Georgia State University. (n.d.[a]). Decibels. Retrieved from <http://hyperphysics.phy-astr.gsu.edu/hbase/Sound/db.html>
- Georgia State University. (n.d.[b]). Huygen's principle. Retrieved from <http://hyperphysics.phy-astr.gsu.edu/hbase/phyopt/huygen.html>
- Szynalski, O. P. (n.d.). Online tone generator. Retrieved from <http://www.szynalski.com/tone-generator/>

# Appendices

## A Code for computer simulations

### A.1 Code for diffraction-free model

Below is the code used to check the diffraction-free model from **Section 5** against experimental data.

```
import math
import plotly.offline as py
import plotly.graph_objs as go

print("Application started")

v = 340
D = 248
k = 244
l = 39
A = 39
B = 39
S = 9
```

```

def is_number(string):
    try:
        float(string)
        return True
    except ValueError:
        return False

print("Use default parameters? (say yes if grabbing \
parameters from a text file)")
res = input()
if (res.startswith('n')):
    print(f"Distance from slits to screen in cm (\
default: {D})")
    res = input()
    if is_number(res):
        D = float(res)

    print(f"Distance from source to slits in cm (\
default: {k})")
    res = input()
    if is_number(res):
        k = float(res)

```

```

print(f"Wavelength in cm (default : {l})")
res = input()
if is_number(res):
    l = float(res)

print(f"Width of slit A in cm (default : {A})")
res = input()
if is_number(res):
    A = float(res)

print(f"Width of slit B in cm (default : {B})")
res = input()
if is_number(res):
    B = float(res)

print(f"Width of separator in cm (default : {S})")
res = input()
if is_number(res):
    S = float(res)

```

```
omega = 2 * math.pi / l * v
```



```
period = 2 * math.pi / omega
```

```
def convert_decibel_to_intensity(dB):  
    return 10 ** (-12) * 10 ** (dB / 10)
```

```
def convert_intensity_to_decibel(intensity):  
    return 10*math.log10(intensity * 10**(12))
```

```
def d_a(x):  
    return math.sqrt(D**2 + (x - (B + S) / 2)**2)
```

```
def d_b(x):  
    return math.sqrt(D**2 + (x + (A + S) / 2)**2)
```

```
def phi(x):  
    return abs(math.pi / l * (d_b(x) - d_a(x)))
```

```

def I(x):
    return (1/k**2) * (A**2 / (d_a(x))**4 + 2*A*B*math.
        cos(phi(x)) / ((d_a(x))**2 * (d_b(x))**2) + B**2
        / (d_b(x))**4)

print("Creating_lists...")
# Lists for measured values
X = []
Y = []

# Lists for predicted values
tx = []
ty = []

values = []
points = []

print("Input_your_values_-_Type_'done'_when_finished , _
    or_reference_a_.txt_file_in_data/experimental")
value = input()

```

```

if ( '.txt' in value):
    print("Grab_experimental_parameters_from_text_file?
        _no_if_no")
    res = input()

    data_filename = value
    data_file = open(f"data/experimental/{data_filename
        }")
    data_lines = data_file.readlines()
    print(f"data_lines:_{data_lines}")

if (not res.startswith('n')):
    # Grab experimental parameters from text file
    parameters_line = data_lines[0]
    parameters_and_equals_signs = parameters_line.
        split(',')
    parameters = []
    for parametre in parameters_and_equals_signs:
        parameters.append(parametre.split('=')[1])
    D = float(parameters[0])
    k = float(parameters[1])
    l = float(parameters[2])
    A = float(parameters[3])

```

```

        B = float(parameters[4])
        S = float(parameters[5])
i = 3
while (i < len(data_lines)):
    print(f"Data_line: {data_lines[i]}")
    values.append([float(data_lines[i].split(' ')[0]),
                    float(data_lines[i].split(' ')[6])])
    X.append(float(data_lines[i].split(' ')[0]))
    Y.append(convert_decibel_to_intensity(
        float(data_lines[i].split(' ')[6])))
    i += 1
else:
    # Convert values to floats and add to list →
    values array
while value != 'done':
    values.append([float(value.split(',')[0]),
                    float(value.split(',')[1])])
    value = input()

for point in values:

```

```

        points.append([point[0],
                        convert_decibel_to_intensity(point[1])])

    for point in points:
        X.append(point[0])
        Y.append(point[1])

    print("Type the filename to save the data to")
    filename = input()

    print("Defining layout...")
    # Define layout for plot
    layout = go.Layout(
        title=f"D={D}, k={k}, l={l}, A={A}, B={B}, S={S}",
        xaxis=dict(
            title="Distance from center (cm)",
        ),
        yaxis=dict(
            title="Intensity"
        )
    )

    print("Generating theoretical prediction...")

```

```

# Generate a theoretical prediction
# of the y value for each x value measured
experimentally
i = 0
while (i < len(X)):
    tx.append(X[i])
    ty.append(I(X[i]))
    if (int(round(i + 1 / len(X))) > int(round(i / len(
        X)))):
        print(f"{int(round((i+1)/len(X)*100))}%")
    i += 1

print("Saving_data_to_text_file...")

print("Name_of_file_to_save_only_experimental_data_to")
experiment_filename = input()

if (experiment_filename):
    experimental_file = open(f"data/experimental/{
        filename}.txt", "w")

print(

```

```

f"Saved_experimental_data_to_data/experimental
/{experiment_filename}")

# Write parameters
experimental_file.write("%s\n" %
                        f"D={D}, k={k}, lambda={l},
                        A={A}, B={B}, S={S}"
                        )

# Write header 'Experimental'
experimental_file.write("\n%s\n" %
                        'Experimental'
                        )

# Loop over measured values and save them to text
file
i = 0
while i < len(X):
    experimental_file.write("%s\n" %
                            f'{X[i]} ..... {values[i]
                            ][1]} dB'
                            )
    i += 1

```

```

# Save data to text file:

thefile = open(f'data/{filename}.txt', 'w')

# Write parameters

thefile.write("%s\n" %
               f"D={D}, k={k}, lambda={l}, A={A}, B={B},
               S={S}"
               )

print("Saving experimental data")

# Write header 'Experimental'

thefile.write("\n%s\n" %
               'Experimental'
               )

# Loop over measured values and save them to text file

i = 0

while i < len(X):
    thefile.write("%s\n" %
                  f'{X[i]} ..... {values[i][1]} dB .....
                  {Y[i]}'
                  )

```



```

    i += 1

print("Saving_theoretical_data")

# Write header 'Theory'
thefile.write('\n%s\n' % 'Theory')

# Loop over predicted values and save them to text file
i = 0
while i < len(X):
    thefile.write("%s\n" %
                  f'{tx[i]}_{}_{{
                    convert_intensity_to_decibel(ty[i
                    ])}_dB_{}_{{ty[i]}}')
    i += 1

print("Normalising_experimental_values...")
# Normalise the measured y-values to fit in [0, 1]
y_max = max(Y)
i = 0
while i < len(Y):
    Y[i] = Y[i] / y_max
    i += 1

```

```

print("Normalising_theoretical_values")

# Normalise the theoretically predicted y-values to fit
in [0, 1]

i = 0
ty_max = max(ty)
while i < len(ty):
    ty[i] = ty[i] / ty_max
    i += 1

print("Saving_normalised_experimental_data")

# Write header 'Normalised experimental'
thefile.write("\n%s\n" %
               'Normalised_Experimental'
               )

# Loop over measured values and save them to text file
i = 0
while i < len(X):
    thefile.write("%s\n" %
                  f'{X[i]}_.....{values[i][1]}_dB_.....'
                  '{Y[i]}')
    )

```

```

    i += 1

print("Saving_normalised_theoretical_values")

# Write header 'Normalised theory'
thefile.write('\n%s\n' % 'Normalised_Theory')

# Loop over predicted values and save them to text file
i = 0
while i < len(X):
    thefile.write("%s\n" %
                  f'{tx[i]}_{}_{{
                    convert_intensity_to_decibel(ty[i
                    ])}_dB_{}_{{ty[i]}}')
    i += 1

print("Creating_traces...")

# Create a trace 'Experimental' for the measured values
experimental = go.Scatter(
    x=X,
    y=Y,
    name="Experimental"

```

```

)

# Create a trace 'Theory' for the theoretically
  predicted values
theory = go.Scatter(
    x=tx,
    y=ty,
    name='Theory_without_diffraction'
)

print("Creating_data_from_traces...")

# Create the data from the traces
data = [experimental, theory]

print("Creating_figures_using_data_and_layout...")

# Create the figure using the data and layout
fig = go.Figure(data=data, layout=layout)

print("Plotting_the_figure_and_saving_to_html_file")

# Plot the figure and save to html file
py.plot(fig, filename=f'plots/{filename}.html')

```

```
print(f"Plot_saved_to_plots/{filename}.html")
```

## A.2 Code for diffraction-including model

Below is the code used to visualise the diffraction-including model from **Section 7**.

```
import math
import plotly.offline as py
import plotly.graph_objs as go

# Experimental parameters
# Parametres matching experimental trials:
# Trial 1 - Single slit with small lambda:
#  $A = 87,5$ ,  $B = 0$ ,  $S = 0$ ,  $D = 248$ ,
#  $wavelength = 87,5$ 
# Trial 2 - Single slit with large lambda:
#  $A = 87.5$ ,  $B = 0$ ,  $S = 0$ ,  $D = 248$ ,
#  $wavelength = 227$ 
# Trial 3 - Double slit, equal width with small
# lambda:
#  $A = 39$ ,  $B = 39$ ,  $S = 9$ ,  $D = 248$ ,
#  $wavelength = 39$ 
```

*# Trial 4 – Double slit , equal width , with  
large lambda:*

*# A = 39, B = 39, S = 9, D = 248,*

*wavelength = 548*

*# Trial 5 – Double slit , one slit twice the  
width of the other , with large lambda:*

*# A = 26, B = 52, S = 9, D = 248,*

*wavelength = 548*

*# Note: All distances measured in cm. Speeds in cm/s*

A = 26

B = 52

S = 9

D = 248

k = 244

wavelength = 548

*# Speed of sound is approx. 340 m/s  $\longrightarrow$  340 \* 100 cm/s*

v = 340 \* 100

omega = 2 \* math.pi \* v / wavelength

```

# Number of sources to use for each slit with Huygen's
    Principle
n = 25

# Distance from centre of slit A to point with
    displacement y, as calculated
# in paper
def d_a(y):
    return math.sqrt(D ** 2 + (y - (B + S) / 2) ** 2)

# Distance from centre of slit B to point with
    displacement y,
# as calculated in paper
def d_b(y):
    return math.sqrt(D ** 2 + (y + (A + S) / 2) ** 2)

# Distance from ith source in slit A to point with
    displacement y,
# as calculated in paper.
# 0th source is in the middle,  $-(n - 1) / 2$  at the top,
    ,and  $(n - 1) / 2$  at the bottom.
def d_ai(i, y):

```

```

    return math.sqrt(D ** 2 + (y + i * A / ( n - 1) - (
        B + S) / 2) ** 2)

# Distance from ith source in slit B to point with
    displacement y,
# as calculated in paper.
# 0th source is in the middle,  $-(n - 1) / 2$  at the top,
    ,and  $(n - 1) / 2$  at the bottom.
def d_bi(i, y):
    return math.sqrt(D ** 2 + (y + i * B / (n - 1) + (
        A + S) / 2) ** 2)

# Converting a path difference between two waves to a
    point to a phase shift
def phase_shift(path_difference):
    return 2 * math.pi / wavelength * path_difference

# Gives the wave contributed by the ith source from
    slit A at a certain point at a specific time.
# The amplitude should be  $A / (d_a^2)$  as calculated in
    the paper, but we multiply by this term
# later in the code so we don't have to do it many
    times

```



```

def partial_A(i, y, t):
    return math.sin(omega * t + phase_shift(d_a(y) -
        d_ai(i, y))) / (d_ai(i, y) ** 2)

# Gives the wave contributed by the ith source from
slit B at a certain point at a specific time.
# The amplitude should be B / (d_b^2) as calculated in
the paper, but we multiply by this term
# later in the code so we don't have to do it many
times

def partial_B(i, y, t):
    return math.sin(omega * t + phase_shift(d_b(y) -
        d_bi(i, y))) / (d_bi(i, y) ** 2)

# Calculates the sum of the waves contributed by all
the sources from slit A
# at the point with displacement y at a certain time t

def sum_A(y, t):
    displacement = 0
    for i in range(int(-(n - 1) / 2), int((n - 1) / 2))
        :
        displacement += partial_A(i, y, t)
    displacement = displacement * A / n

```

```

return displacement

# Calculates the sum of the waves contributed by all
the sources from slit B
# at the point with displacement y at a certain time t
def sum_B(y, t):
    displacement = 0
    # Summing from  $i = -(n - 1) / 2$  to  $(n - 1) / 2$ .
    Converting to
    # int because the division yields a float
    for i in range(int $(-(n - 1) / 2)$ , int $((n - 1) / 2)$ )
        :
        # For each source, add the displacement
        contributed to the total
        # displacement
        displacement += partial_B(i, y, t)
    displacement = displacement * B / n
    # Return the displacement of the resultant wave at
    the point with displacement y at
    # time t
    return displacement

```

Y = []

```
I = []
```

```
# Numerical integration of sum_A, which is the  
displacement of the resultant wave coming from slit  
A at the point  
# with displacement y at a time t, from 0 to 2pi /  
omega to get the actual displacement  
# contributed by slit A at the point with displacement  
y
```

```
def square_displacement(y, t):  
    return (sum_A(y, t) + sum_B(y, t)) ** 2
```

```
def average_square_displacement(y):  
    t = 0  
    result = 0  
    slices = 10  
    upper_bound = 2 * math.pi / omega  
    dt = upper_bound / slices  
    while t <= upper_bound:  
        result += square_displacement(y, t)  
        t += dt  
    result /= slices
```

```

    return result

def displacement_A(y):
    t = 0
    displacement = 0
    slices = 10
    upper_bound = 2 * math.pi / omega
    dt = upper_bound / slices
    while t <= upper_bound:
        displacement += sum_A(y, t)
        t += dt
    displacement /= slices
    return displacement

# Numerical integration of sum_B, which is the
displacement of the resultant wave coming from slit
B at the point
# with displacement y at a time t, from 0 to 2pi /
omega to get the actual displacement
# contributed by slit B at the point with displacement
y
def displacement_B(y):
    t = 0

```

```

displacement = 0
slices = 10
upper_bound = 2 * math.pi / omega
dt = upper_bound / slices
while t <= upper_bound:
    displacement += sum_B(y, t)
    t += dt
displacement /= slices
return displacement

# Return the displacement of the superposition of the
resultant waves coming from slits
# A and B
def wave(y):
    return displacement_A(y) + displacement_B(y)

# To get the intensity, square the displacement of the
superposition
def intensity(y):
    return wave(y) ** 2

# Since the experiment measured intensity values for
displacement values ranging

```

```

# from -192 to 192, do the same here
for i in range(-192, 192):
    # Simply append the displacement to this list. So
    # the list will be
    #  $Y = [-192, -191, \dots, 3, 2, 1, 0, 1, 2, 3, \dots, 191, 192]$ 
    Y.append(i)
    # For each displacement value, use the intensity
    # function defined earlier to predict
    # the intensity at that point, then add it to the
    # list I
    I.append(average_square_displacement(i))

I_normalised = []

for value in I:
    # I_normamlised will keep the shape/characteristics
    # of I when plotted,
    # but the maximum will be 1
    I_normalised.append(value / max(I))

# Define layout for plot
layout = go.Layout(

```

```

        title=f"D={D} , k={k} , wavelength={wavelength} , A={A} , B={B}
            , S={S}" ,
xaxis=dict(
            title="Distance from center (cm)" ,
        ) ,
yaxis=dict(
            title="Intensity"
        )
)

diffraction = go.Scatter(
    x=Y,
    y=I_normalised ,
    name="Theory with diffraction"
)

data = [diffraction]

fig = go.Figure(data=data , layout=layout)

print("Name of file to save diagram to:")
filename = input()

```

```

if '.html' not in filename:

    filename = f'{filename}.html'

py.plot(fig, filename=f'diagrams/diffraction/{filename}
        ')

print(f'Plot saved to diagrams/diffraction/{filename}')

```

## B Evaluation of intensity integral

Below we evaluate the three integrals from (14) in **Section 5**:

$$\begin{aligned}
 I = & \frac{\omega}{2\pi} \left( \frac{A^2}{d_a^4} \int_0^{2\pi/\omega} \sin^2 \omega t \, dt \right) \\
 & + \frac{\omega}{2\pi} \left( \frac{2AB}{d_a^2 d_b^2} \int_0^{2\pi/\omega} \sin \omega t \sin(\omega t + \phi) \, dt \right) \\
 & + \frac{\omega}{2\pi} \left( \frac{B^2}{d_b^4} \int_0^{2\pi/\omega} \sin^2(\omega t + \phi) \, dt \right)
 \end{aligned} \tag{B.1}$$

The first integral is simple to evaluate:



$$\begin{aligned}
& \int_0^{2\pi/\omega} \sin^2 \omega t \, dt \\
&= \int_0^{2\pi/\omega} \frac{1 - \cos 2\omega t}{2} \, dt \\
&= \frac{1}{2} \int_0^{2\pi/\omega} (1 - \cos 2\omega t) \, dt \\
&= \frac{1}{2} \left( \frac{\sin 2\omega t}{2\omega} \right) \Big|_0^{2\pi/\omega} \\
&= \frac{1}{2} \times \frac{2\pi}{\omega} \\
&= \frac{\pi}{\omega}.
\end{aligned} \tag{B.2}$$

For the second integral, we will first find the indefinite integral:

$$\begin{aligned}
& \int \sin \omega t \sin(\omega t + \phi) dt \\
&= \int \frac{-\cos(2\omega t + \phi) + \cos(-\phi)}{2} dt \\
&= \frac{1}{2} \int \left( \cos(\phi) - \cos(2\omega t + \phi) \right) dt \\
&\text{Let } u = \omega t + \phi \implies dt = \frac{du}{\omega} \\
&\frac{1}{2\omega} \int \left( \cos \phi - \cos(2u - \phi) \right) du \\
&= \frac{1}{2\omega} \left( u \cos \phi - \frac{1}{2} \sin(2u - \phi) \right) + C \\
&= \frac{1}{2\omega} \left( (\omega t + \phi) \cos \phi - \frac{1}{2} \sin(2\omega t + \phi) \right) + C \\
&= \frac{1}{4\omega} \left[ 2(\omega t + \phi) \cos \phi - \sin(2\omega t + \phi) \right] + C
\end{aligned}$$

Now, we can evaluate the integral at the boundaries:

$$\begin{aligned}
& \int_0^{2\pi/\omega} \sin \omega t \sin(\omega t + \phi) dt \\
&= \frac{1}{4\omega} \left( 2(\omega t + \phi) \cos \phi - \sin(2\omega t + \phi) \right) \Big|_0^{2\pi/\omega} \\
&= \frac{1}{4\omega} \left( 4\pi \cos \phi + 2\phi \cos \phi - \sin(4\pi + \phi) - 2\phi \cos \phi + \sin \phi \right) \quad (\text{B.3}) \\
&= \frac{1}{4\omega} \times 4\pi \cos \phi \\
&= \frac{\pi}{\omega} \cos \phi
\end{aligned}$$

For the third and last integral, we will perform a simple u substitution

and find indefinite integral:

$$\text{Let } u = \omega t + \phi \implies dt = \frac{du}{\omega} \implies \frac{1}{\omega} \int \sin^2 u \, du$$

Now, the procedure is simple and similar to that of the first integral, and is left to reader. The third integral evaluates as follows:

$$\int_0^{2\pi/\omega} \sin^2(\omega t + \phi) \, dt = \frac{\pi}{\omega}. \quad (\text{B.4})$$

Now, using the results from (B.2), (B.3), and (B.4), we have


$$\begin{aligned} I &= \frac{\omega}{2\pi} \left[ \frac{A^2}{d_a^4} \times \frac{\pi}{\omega} + \frac{2AB}{d_a^2 d_b^2} \times \frac{\pi}{\omega} \cos \phi + \frac{B^2}{d_b^4} \times \frac{\pi}{\omega} \right] \\ &= \frac{1}{2} \left[ \frac{A^2}{d_a^4} + \frac{2AB}{d_a^2 d_b^2} \cos \phi + \frac{B^2}{d_b^4} \right]. \end{aligned}$$

## C Plots of diffraction-including model

Below are the plots for the diffraction-including model from **Section 7**.


**Figure C.1:** Single slit - Small wavelength

$D=248$ ,  $k=244$ ,  $\lambda=87.5$ ,  $A=87.5$ ,  $B=0$ ,  $S=0$

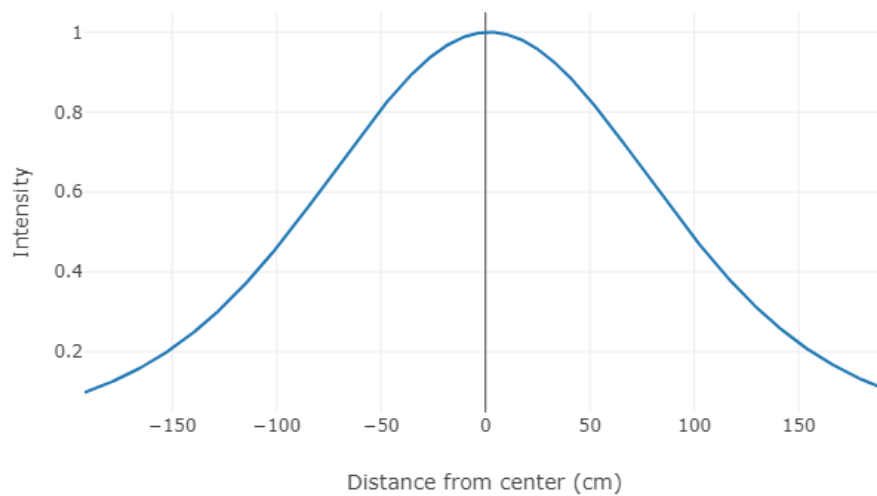


**Figure C.2:** Single slit - Large wavelength

D=248, k=244,  $\lambda=227$ , A=87.5, B=0, S=0

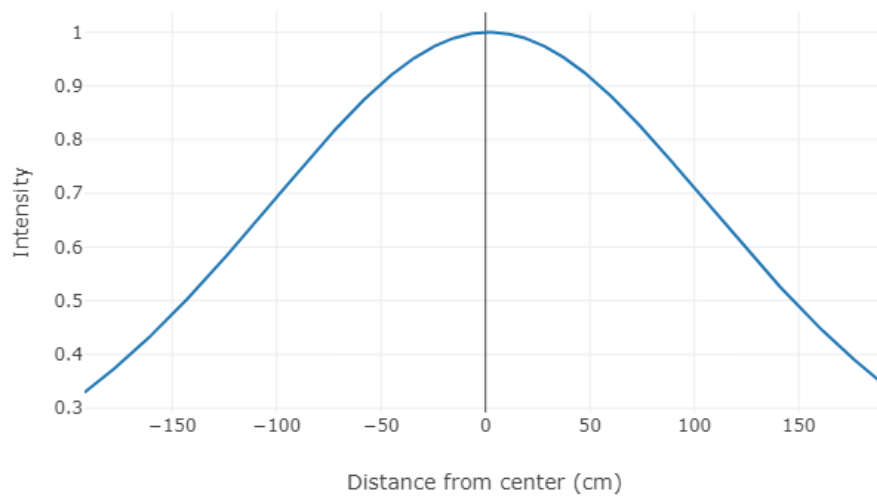


**Figure C.3:** Double slit - Small wavelength

$D=248$ ,  $k=244$ ,  $\lambda=39$ ,  $A=39$ ,  $B=39$ ,  $S=9$

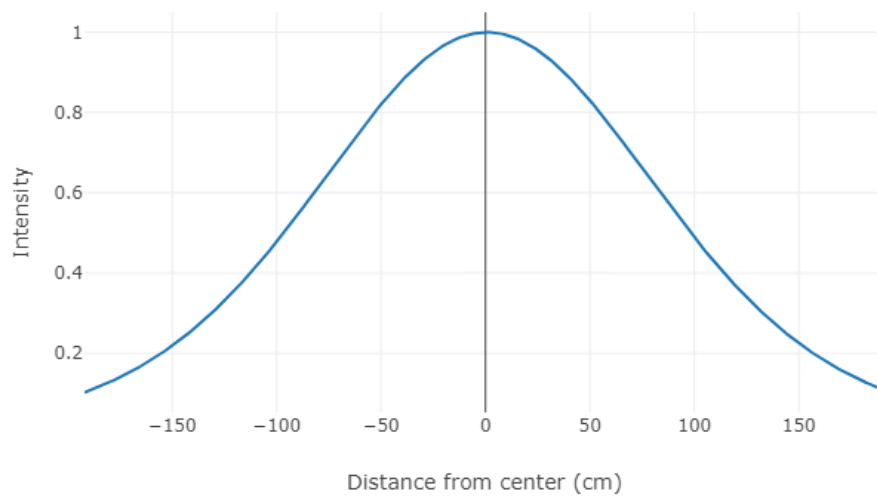

**Figure C.4:** Double slit - Large wavelength

$D=248$ ,  $k=244$ ,  $\lambda=548$ ,  $A=39$ ,  $B=39$ ,  $S=9$

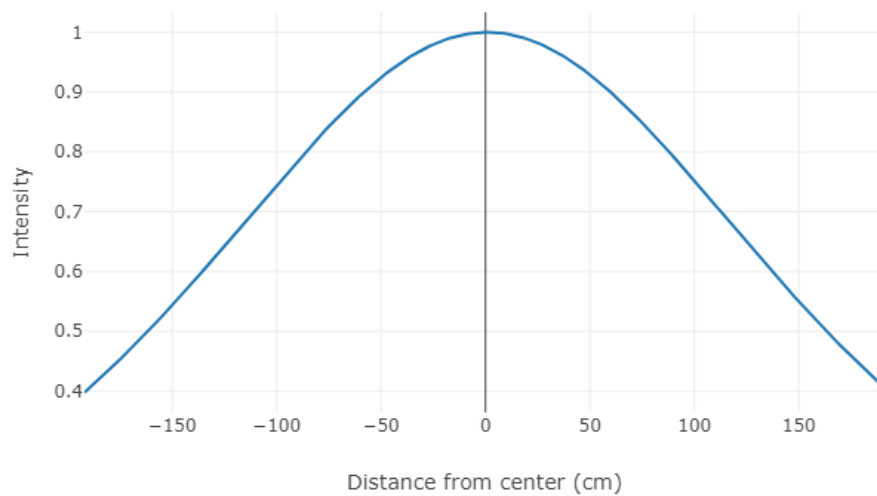

**Figure C.5:** One slit twice as wide as the other - Large wavelength

