



UNITED STATES MARINE CORPS
MARINE CORPS AIR STATION
BOX 555151
CAMP PENDLETON, CA 92055-5151

StaO 3710.1H
MAY 06 2025

STATION ORDER 3710.1H

From: Commanding Officer, Marine Corps Air Station Camp Pendleton
To: Distribution List

Subj: AIRFIELD OPERATIONS MANUAL, MARINE CORPS AIR STATION CAMP
PENDLETON (SHORT TITLE: AIRFIELD OPERATIONS MANUAL)

Ref: (a) NAVAIR 00-80T-109
(b) CNAF M-3710.7
(c) NAVAIR 00-80T-114
(d) LZ PHOENIX MOU dtd 10 February 2025
(e) NAVAIR 00-80R-14
(f) OPNAVINST 7350.6S
(g) NAVAIR 00-80R-20
(h) StaO P8020.2J
(i) NAVAIR 00-80T-124
(j) MCIWEST-MCBCAMPO 3710.1

Encl: (1) LOCATOR SHEET

1. Situation. To publish the Airfield Operations Manual for Marine Corps Air Station Camp Pendleton, California.

2. Cancellation. StaO P3710.1G.

3. Mission. This Manual has been prepared as per references (a) through (i), Federal Aviation Administration regulations and other Department of the Navy directives. These instructions do not supersede or modify instructions issued by higher authority, nor do they address every possible contingency for which the exercise of good judgment and common sense remains paramount.


4. Execution. This revision contains substantial changes and should be reviewed in its entirety.

5. Administration and Logistics. Recommendations concerning the Airfield Operations Manual are invited. Recommendations should be forwarded to the Commanding Officer via the Chain of Command.

6. Command and Signal

a. Command. This Order is applicable to all personnel, units and activities located aboard and/or that conduct aviation operations at Marine Corps Air Station Camp Pendleton.

b. Signal. This Order is effective the date signed.


C. M. HOUSER

DISTRIBUTION: A

Copy to: MCB CAMP PENDLETON (AC/S O&T)
CG I MEF (G3H)
CG 3D MAW
CG 2ND MAW
CG 4TH MAW
CG FIRST MARDIV (G-3 AIR)
HMLA 775
MCIWEST
MAG 16
MAG 39
MAG 41
MACG 38
MAWTS 1
MCAS CHERRY POINT
MCAS MIRAMAR
MCAS NEW RIVER
MCAS YUMA
NAS NORTH ISLAND

LOCATOR SHEET

Subj: AIRFIELD OPERATIONS MANUAL, MARINE CORPS AIR STATION CAMP
PENDLETON (SHORT TITLE: AIRFIELD OPERATIONS MANUAL)

Location: _____
(Indicate location(s) of the copy(ies) of this Manual.)

AIRFIELD OPERATIONS MANUAL

RECORD OF CHANGES

Log completed change action as indicated.

Change Number	Date of Change	Date Entered	Signature of Person Incorporating Change

AIRFIELD OPERATIONS MANUAL

CONTENTS

CHAPTER

- 1 GENERAL
- 2 FLIGHT PLANNING
- 3 COURSE RULES
- 4 INSTRUMENT PROCEDURES
- 5 AIRFIELD OPERATIONS & MAINTENANCE
- 6 TRANSIENT SERVICES
- 7 EMERGENCY RESPONSE PROCEDURES
- 8 AIRFIELD SECURITY
- 9 GROUND VEHICLE OPERATIONS ON THE AIRFIELD

APPENDIX

- A RUNWAY 21 VFR ARRIVAL AND DEPARTURE ROUTES
- B AIRPORT DIAGRAM
- C PHONE DIRECTORY
- D MCAS CAMP PENDLETON CLOSED FIELD OPERATIONS PHONE AND FREQUENCY LIST
- E LOCAL TRAFFIC PATTERN
- F CLASS "D", CLASS "E", AND LIMA AIRSPACE
- G RADIO FREQUENCY DIRECTORY
- H CALA AND ARMING/DE-ARMING DIAGRAM
- I AIRCRAFT HOT REFUELING PITS
- J EMERGENCY LANDING PAD (ELP) DIAGRAM
- K WEIGHT BEARING CAPACITY CHART

MCAS CAMP PENDLETON HISTORY

The history of Marine Corps Air Station (MCAS) Camp Pendleton can be traced back to the early developments of the air station and its beginnings as a small, outlying airfield. MCAS Camp Pendleton comprises 410 acres within Marine Corps Base (MCB), Camp Pendleton and was built in 1942 as part of the original construction of the base. Today, MCAS Camp Pendleton is a subordinate installation under Commanding General, Marine Corps Installations West-Marine Corps Base, Camp Pendleton. From its start during World War II to its present status as a highly technical and complex facility, MCAS Camp Pendleton continues to support the programs and policies of Marine Corps aviation as it forges ahead in the 21st century.



On 25 September 1942, the Marine Corps Auxiliary Landing Field (MCALF), Camp Pendleton was officially activated. When the Landing Field was activated, one aircraft squadron and one Marine Air Traffic Control Squadron were assigned to the Station. The first



facilities constructed on the air station were a 6,000-feet long by 200-feet wide runway, a taxiway, a warm-up apron, a 50,000-gallon fuel storage facility, and a tower/operations building. The first aircraft to land on the dirt runway was the Beech C-45. The airfield was used to train Marine aviators during World War II as a secondary runway for MCAS El Toro, then the home of Third Marine Aircraft Wing. In 1947, the Landing Field was relinquished to the Bureau of

Aeronautics and subsequently transferred to the Commanding Officer at MCAS El Toro. The airfield was re-designated a Marine Corps Outlying Field (MCOFL) of MCAS El Toro.

From 1947 to 1955 MCOFL Camp Pendleton saw many changes, beginning with the return of Marine Observation Squadron 6 (VMO-6) from World War II operations in China and Okinawa. Originally a fixed-wing squadron flying the OY-2 observation plane, the squadron added four HO3S-1s in 1950, thus becoming the first composite squadron flying both fixed-wing and rotor-wing aircraft. VMO-6 and MCOFL Camp Pendleton were home to the first helicopters and crew to be trained for combat foreshadowing MCAS Camp Pendleton's future as a helicopter training base.





In 1955, MCOLF Camp Pendleton was transferred back to the cognizance of the Bureau of Aeronautics for the purpose of future development as a helicopter base. The purpose of the helicopter base would be to provide air lift capability for Fleet Marine Force (FMF) units. In 1956, VMO-6 would return to MCOLF Camp Pendleton from Korea now manned with 12 Cessna OE-1 fixed wing aircraft and nine Sikorsky HO3S-1 helicopters. The HO3S-1 was replaced in May of 1956 with the Kaman HOK-1 helicopter which was a four-place liaison helicopter used for observation, reconnaissance, medical evacuation, utility, and air/sea rescue.

During the years 1960-1979, MCOLF Camp Pendleton reverted to MCALF Camp Pendleton, undergoing a process of expansion and modification prompted by the war in Vietnam and the increasing use of helicopters in combat. VMO-6 averaged approximately 900 flying hours a month while at MCALF Camp Pendleton, supporting operations including training flights, personnel transport, and medical evacuation requiring a helicopter and crew on constant alert. By 1977, MCALF Camp Pendleton housed 67 operational aircraft and plans were underway to increase that number to 93 by 1980. On 1 September 1978, because of its growth, MCALF Camp Pendleton was re-designated as a Marine Corps Air Facility (MCAF). At the same time, MAG-39 was reactivated and stationed aboard MCAF Camp Pendleton where it remains today supporting the 3d and 4th Marine Aircraft Wings, 1st Marine Division and MCB Camp Pendleton.



By 1985, MCAS Camp Pendleton was home to four tactical squadrons, one observation squadron, one helicopter training squadron, and one logistics squadron. It soon became evident that a full-fledged air station under its own commanding officer would be necessary to fulfill increasing air station requirements and so, on 1 April 1985, MCALF Camp Pendleton was designated as Marine Corps Air Station (MCAS) Camp Pendleton. On 12 January 1987, the airfield was commemoratively named and

dedicated Munn Field after Lieutenant General John "Toby" C. Munn, (17 October 1906 - 14 April 1986), the first Marine aviator to command MCB Camp Pendleton. Then in February 1988, a ceremony was held to dedicate in his honor, a newly built seven-story air traffic control tower, and to officially activate the Headquarters and Headquarters Squadron.

Lieutenant General Munn was the 8th Assistant Commandant of the Marine Corps and a United States Naval Aviator. He served for 37 years in the United States Marine Corps.



Munn was born 17 October 1906, in Prescott, Arkansas, and after graduating from high school in 1923 he attended the United States Naval Academy. After graduating on 2 June 1927, he was commissioned as a Second Lieutenant. He attended Officers' Basic Course at the Philadelphia Navy Yard and was assigned to the 2d Marine Brigade to participate in the United States occupation of Nicaragua. Returning to the United States in September 1929, he was assigned to the guard force at Herbert Hoover's summer camp near Criglersville for three months, and then was ordered to attend aviation training at Hampton Roads.

In May 1930, Munn was sent for more training at Naval Air Station Pensacola and was winged the following January, serving there for two more months, and then transferring to Naval Air Station San Diego. In October 1931, he joined Scouting Squadron 14-M, which embarked aboard USS Saratoga (CV-3) the following month (one of the first two Marine squadrons to serve aboard Navy carriers). He was promoted to First Lieutenant in January 1934, then left the USS Saratoga in June to return to San Diego. There he joined Bombing Squadron 4-M for a two-year duty aboard the USS Lexington (CV-2) and the USS Langley (CV-1). In June 1936, he was assigned to aviation duty at Marine Corps Base Quantico and promoted to Captain in August. In May 1938, Munn sailed for Colombia to serve as a Naval Attaché at numerous American embassies in South America, including Colombia, Panama, Venezuela, Ecuador, and Peru. He returned to the United States in March 1941, and was stationed briefly in Washington, D.C. before being assigned to VMO-151 of MAG-11 at Quantico. He was promoted to Major in July 1941 and would embark upon the USS Ranger (CV-4) several times, until VMO-151 headed for San Diego in December upon the United States entry into World War II. Munn was promoted to Lieutenant Colonel in August 1942 and departed for the Pacific War. On 3 September 1942, he arrived on Guadalcanal in the first transport plane of the Cactus Air Force to land at Henderson Field during the Guadalcanal Campaign. While on Guadalcanal he served in staff roles for the 1st and 2d Marine Aircraft Wings (G-2 and G-3) and would eventually be awarded the Navy Commendation Medal with valor device.

In March 1943, Munn assumed command of MAG-11 in the New Hebrides, but returned to the United States in July, serving as the Assistant Head of the Aviation Planning Section for the United States Fleet in Washington until February 1945. While serving in this capacity, he was promoted to Colonel in November 1943. In March 1945, Colonel Munn returned to the Pacific to take command of MAG-31. Under his command, the unit destroyed 180 Japanese planes in the Battle of Okinawa, landing at Yontan Airfield on 7 April. He was awarded the Silver Star and his first Legion of Merit, and commanded MAG-31 after the war's end until April 1946. After a month's temporary duty in Washington, he reported to Pearl Harbor in June 1946 as Aviation Plans Officer and Fleet Marine Officer for United States Pacific Fleet.

In June 1948, Munn transferred to Marine Corps Air Station Cherry Point to command Marine Wing Service Group 2 (Provisional), serving as Chief of Staff of Air for Fleet Marine Force, Atlantic and 2d Marine Aircraft Wing. He attended the National War College in August 1950 and graduated the following summer. In June 1951, he was named a member of the Joint Strategic Plans Group of the Joint Staff and served in that capacity until February 1952. He then served in the Division of Aviation at Headquarters Marine Corps as Assistant Director. Munn was named Chief of Staff of the 1st Marine Aircraft Wing and embarked for the Korean War in April 1953. While in Korea, he was awarded his second

Legion of Merit and returned home in April 1954 to assume command of Marine Corps Air Station El Toro. While there, he was promoted to Brigadier General in August 1954, then in October of the same year, he was transferred to Naval Station Norfolk as Assistant Commanding General for Aircraft for Fleet Marine Force, Atlantic. Ordered to Washington in February 1955, he was assigned to the Office of Vice Chief of Naval Operations as Marine Corps Liaison Officer, until October. He then served as Inspector General of the Marine Corps until January 1956, when he returned to Cherry Point to assume command of the 2d Marine Aircraft Wing. He was promoted to Major General in August 1956.

In February 1958, Major General Munn became Director of Aviation at Headquarters Marine Corps, until 1 January 1960, when he assumed the post of Assistant Commandant of the Marine Corps. With the post came a temporary promotion to Lieutenant General; he served in this capacity through March 1963. He then reverted to his permanent grade of Major General, when he took command of Marine Corps Base Camp Pendleton. Upon his retirement on 1 July 1964, he was appointed by the President, and confirmed by the Senate, to the grade of Lieutenant General on the retired list.

Lieutenant General (Retired) Munn died 14 April 1986 in Encinitas, California.

The continuous growth of MCAS Camp Pendleton since World War II saw only one major setback during the winter of 1993 when heavy rains caused the most destructive flood to ever take place on the air station. On 16 January, a flash flood burst the Santa Margarita River Levee behind the historic adobe ranch house and struck with enough force to topple the Basilone Bridge and liquefy the dike. The flood damaged 47 of the 71 aircraft parked at the air station with an estimated cost of \$58 million in damage to the airfield and buildings.

Growing from its early beginnings as a small outlying field during World War II, MCAS Camp Pendleton has developed into a fully operational Category II airfield and manages roughly 200 square miles of air space up to 6000 feet. The air station has grown from a single flying squadron with only a few support personnel in 1942, to eight flying and three support squadrons with almost 200 operational aircraft and 6400 support personnel today. Averaging over 3300 flight hours per month, MCAS Camp Pendleton directly enhances support to our warfighters and the six functions of Marine Aviation through a diverse range of operations from Marine Air Ground Task Force exercises and operations, troop deployment and redeployment via C-130, C-17 and C-5 aircraft, to initial training for aircrew and aircraft maintainers.





The Air Station is home to HMLAT-303, the largest H-1 training squadron in the Marine Corps. HMLAT-303 specializes in training new aviators, refresher training for pilots returning from non-flying duties, conversion training to newly introduced platforms, and enlisted aircrew training. MCAS Camp Pendleton is the premier site and training hub for the HMLA community. Additionally, MCAS Camp Pendleton has seen the transition of the three CH-46 squadrons to two MV-22 squadrons and the addition of MV-22 simulators and support facilities.

The Air Station is currently home to MAG-39, HMLA-169, HMLA-267, HMLA-367, HMLA-369, HMLAT-303, HMLA-775, VMM-164, VMM-364, MALS-39, MAG-41 Det A, MCIWEST-MCB Range Operations Division (ROD), and Marine Aviation Training and Systems Site.

GENERAL DESCRIPTION

- 410.67 Acres/0.642 Square Miles
- 89 Structures, 12 Temporary Facilities, 71 Utilities

GENERAL FACTS & FIGURES

Class IIIB Air Traffic Facility

- 199 Square Miles of Airspace (Class D, E, L, and G extension; surface to 5000')
- Single 6005'X 200' Runway
- 100,000+ Annual Flight Operations

Category 2 Airfield

- Airfield Services (ARFF, ATC-Tower/Radar, Fuel, Flight Planning, Weather)
- Airfield Assets (ASOS, TACAN, PAPI, PAR, ASR, GPS, ATIS)
- 8 Flying Squadrons (AH-1, UH-1, and MV-22)
- 3 Support Squadrons (MALS, H&HS, and MAG-39 HQHQSDN)
- 5 Entry level Schools (Aviation Ordnance Technician-Rotary Wing, H-1 Flightline Mechanic, H-1 Airframe Mechanic, H-1 Avionics Technician, Avionics "I" Level Technician Rotary Wing)
- 4 Access Gates
- 1 Satellite Mess Hall
- 1 Armory
- Station Classroom
- T/M/S Simulators for AH-1W, AH-1Z, UH-1Y, MV-22
- Consolidated RADAR Control Facility
- Satellite College Campus (Embry Riddle Aeronautical University)

CONSOLIDATED RADAR CONTROL FACILITY

The \$8 million Consolidated RADAR Control Facility dedication took place on 7 February 1996 and featured four digitalized surveillance radars and two range-control radar units. The radar displays for Range Control provide a picture of real-time safety and training evolutions within the R-2503 complex while Arrival Control is equipped with the latest FAA Standard Terminal

Automation Replacement System (STARS) displays for next-generation air traffic control technologies and National Airspace System Modernization (NASMOD).

MARINE AVIATION TRAINING SYSTEMS SITE

MCAS Camp Pendleton currently possesses aircraft simulator trainers for the AH-1W, AH-1Z, UH-1Y, and MV-22 at Marine Aviation Training Systems Site (MATSS) that provide computer-based simulation for both new and veteran pilots. MATSS underwent a \$2.5 million renovation project that has enhanced support and throughput of the use of the simulators in 2011 and 2012. The simulators are designed to provide pilots with the most realistic training environments to prepare them for deployment to today's battlefields by recreating the cockpit, control systems, operation procedures, movement and functionality of each type of aircraft. They are also key in transitioning pilots to the new series AH-1Z and UH-1Y aircraft from their previous versions currently in the out-phasing process. The simulators save money by alleviating the cost and time of aircraft maintenance and fuel while increasing the amount of flight training time. In the simulators, pilots can experience the worst possible scenarios without the risk of losing their aircraft or lives.

NATURAL RESOURCES

- 87 Documented Animal Species including (53), (12) Reptiles, (4) Amphibians and (18) Mammals
- 131 Documented Species of Plants
- 3 Federally Listed 'Endangered' Species

INSTALLATION POPULATION

- 5442 Service Members
- 1955 Civilian Federal Government Employees and contractors (FY22/23)

PRINCIPAL INSTALLATION POPULATION

- (3) SUPPORT: MCAS Camp Pendleton H&HS, MAG-39 PSD, MALS-39
- (8) FLYING SQUADRONS: HMLA-169, HMLA-267, HMLA-367, HMLA-369, HMLAT-303, HMLA-775, VMM-164, VMM-364
- MATSS and ROD

THIS
PAGE
INTENTIONALLY
LEFT
BLANK

AIRFIELD OPERATIONS MANUAL

CHAPTER 1

GENERAL

	<u>PARAGRAPH</u>	<u>PAGE</u>
BACKGROUND	1000	1-2
AIRFIELD INFORMATION	1001	1-3
SERVICES AND FACILITIES	1002	1-4
AIRFIELD LIGHTING	1003	1-8
COMMUNICATIONS FACILITIES	1004	1-9
NAVIGATION AIDS	1005	1-9
REPORTING NEAR MIDAIR COLLISIONS (NMAC)	1006	1-10
THINGS FALLING OFF AIRCRAFT (TFOA)	1007	1-10
VIOLATIONS OF REGULATIONS	1008	1-10
BIRD/ANIMAL AIRCRAFT STRIKE HAZARD (BASH)	1009	1-10
ELECTRONIC TESTING/TUNING	1010	1-10

AIRFIELD OPERATIONS MANUAL

CHAPTER 1

GENERAL

1000. BACKGROUND

1. Policy. The regulations in this manual govern support of flight operations at Marine Corps Air Station (MCAS) Camp Pendleton. The MCAS Camp Pendleton Operations Officer is the direct representative of the MCAS Camp Pendleton Commanding Officer on all matters pertaining to the control and clearance of aircraft operations aboard this Air Station. The Deputy Operations Officer is responsible for maintaining this manual and issuing changes as necessary.

2. Organization and Communications. MCAS Camp Pendleton is a subordinate unit located aboard, Marine Corps Installations West, Marine Corps Base, Camp Pendleton (MCIWEST-MCB CAMPEN). Message plain language addresses are as follows:

MCAS Camp Pendleton
CG MCI WEST-MCB CAMPEN

Address messages to MCAS Camp Pendleton when the request pertains to air operations at MCAS Camp Pendleton. For use of Marine Corps Base (MCB) Camp Pendleton ranges or flight in R-2503A/B/C/D, address messages to CG MCIWEST-MCB CAMP PENDLETON CA//O&T//.

3. Air Station Security. MCB Camp Pendleton Military Police provide air station security to ensure only authorized personnel have access to the flight line and aircraft. Sentries are armed and are authorized to use deadly force. Access to the flight line for tenant and non-tenant personnel when the field is closed, must be coordinated with the MCAS Camp Pendleton Duty Officer at 763-1154.

4. Caution to All Users. While this Airfield Operations Manual contains current information on the date of publication, operating hours and procedures are subject to change to support operational requirements. MCAS Camp Pendleton/MCB Camp Pendleton airspace is heavily congested due to a high operations tempo involving different aircraft types and patterns. Additionally, weather can change rapidly, and high terrain surrounds the airfield. Runway 21 Approach-Departure Surface and the Northern Transitional Surface Area are not in compliance with NAVFAC P80.3 Appendix E due to environmental restrictions. The Automatic Surface Observation System (ASOS) tower penetrates the Northern Transitional Surface Area by two feet. In order to minimize safety of flight risks, users of MCAS Camp Pendleton should adhere to the following procedures:

a. Check Flight Information Publications (FLIP), Notices to Airmen (NOTAMS) for KNFG and KOKB (Oceanside Muni) and coordinate with Airfield Operations at (760)725-8016 early in the planning phase and confirm scheduled support prior to commencement of an operation or training exercise.

b. Use Instrument Flight Rules (IFR) arrival procedures if unfamiliar with MCAS Camp Pendleton course rules and local operating procedures.

c. Monitor Automatic Terminal Information Service (ATIS), and exercise caution during ground operations to avoid conflict with construction,

maintenance, and ordnance activities adjacent to aircraft operating and parking areas.

1001. AIRFIELD INFORMATION

1. Location. MCAS Camp Pendleton is located at latitude 33 degrees 18 minutes north, longitude 117 degrees 21 minutes west, within the confines of Marine Corps Base Camp Pendleton, and 35 miles north of the city of San Diego. The field elevation is 78' above Mean Sea Level, with a magnetic variation of 13 degrees east. MCAS Camp Pendleton's Class D/E airspace is located within Special Use Airspace R-2503 A/B/C/D.

2. Hours of Operations. MCAS Camp Pendleton operating hours are as published in the current edition of the IFR Supplement:

Monday-Thursday	0800-0000 (PST)
Monday-Thursday	0900-0100 (PDT)
Friday	0800-1700
Weekends and Holidays	Normally Closed

a. Check NOTAMs website for International Civil Aviation Organization (ICAO) KNFG at <https://www.notams.jcs.mil>, Daily Brief Sheet updates, or contact MCAS Camp Pendleton Flight Clearance at (760)725-8016 for current airfield hours.

b. The Airfield Operations Department is manned at least one hour before scheduled field opening and during airfield operating hours. The Air Station is unattended, and no services are provided when the airfield is closed, except for the Aircraft Rescue and Firefighting and Security Sections, which operate 24 hours a day, 365 days a year. The Airfield will close on time unless prior coordination is made.

c. MAG-39 squadrons shall submit requests to modify airfield/fueling hours to MAG-39 Operations. HMLA-775 can request changes to the MCAS Camp Pendleton Deputy Operations Officer at (760)763-5275. Non-tenant requests should be submitted five days in advance via phone call to MCAS Camp Pendleton Flight Clearance at (760)725-8016.

d. Requesting units shall request airfield/fueling hours no less than 48 hours prior and notify the MCAS Camp Pendleton Deputy Operations Officer as soon as possible when an approved modification request is canceled.

3. Runway. The airfield consists of a single Class A asphalt runway (Rwy 3/21), with primary use of Runway 21 based on prevailing winds. The runway is 6005' long and 200' wide, with asphalt shoulders paralleling both sides. Lighted runway distance markers are located at 1000' intervals, approximately 50' from the runway edge. The runway is primarily used for helicopter and tiltrotor operations. Grass areas located on both sides of the runway are used for helicopter operations. Both Runway 21 and Runway 3 have paved, 1000' overruns.

a. Fixed-wing departures are authorized from the following intersections:

(1) Charlie taxiway: Intersection departure distance for Runway 21 5400'.

(2) Delta taxiway: Intersection departure distance for both runways are 3000'.

(3) Echo taxiway: Intersection departure distance for Runway 3 is 4850'.

(Distances are rounded down to the nearest 50 - foot increment.)

4. Aircraft Parking Ramps (Appendix B)

a. North Ramp. The North Ramp is located just to the North of Hangar 7 and is primarily used by tenant squadrons and for air freight operations involving oversize transient aircraft.

b. South Ramp. The South Ramp is adjacent to Hangars 1 through 5 and is primarily used by tenant squadrons.

c. Visiting Aircraft Line (VAL). The VAL is located between the North and South Ramps, adjacent to the Control Tower. Permission to park on the VAL can be obtained by calling Flight Clearance at (760)725-8016.

5. Taxiways. The airfield has ten asphalt or concrete taxiways as depicted in Appendix B.

6. Grass Areas/Helo Spots (refer to Appendix B)

a. Right/Left Grass. The grass area located northwest of and parallel to Runway 3/21 is referred to as the Right or Left Grass, depending on the runway in use. It is used heavily for helicopter/tiltrotor approach and landing practice.

b. North Grass. The grass area located southeast of and parallel to Runway 3/21 between the Bravo and Delta Taxiways. This area is used for helicopter/tiltrotor hover and low altitude work.

c. Helicopter (Helo) Spots. Four helo spots are located on Papa Taxiway. All are marked by a large "H" painted in retro-reflective white paint. Two additional helo spots are in the vicinity of the Hot Refueling Pits on E2 and F2 Taxiways. These two spots are primarily for transitioning to and from the fuel pits.

CAUTION: DUE TO PROXIMITY OF PARKED AIRCRAFT, HELO SPOT PAPA TWO IS NO LONGER USED FOR TAKEOFF OR LANDING.

CAUTION: DUE TO ROTOR WASH AND THE PROXIMITY OF PARKED AIRCRAFT, LARGE TRANSPORT AND HEAVY-LIFT VERTICAL TAKE OFF AND LANDING (VTOL) AIRCRAFT (E.G., CH-53/47 AND MV-22) ARE NOT AUTHORIZED TO LAND ON OR DEPART FROM THE P1-P4 HELO SPOTS.

7. Weight Bearing Capacity. Refer to the FLIP Enroute Supplement and Appendix K for MCAS Camp Pendleton's weight bearing capacity.

8. Windsocks. Windsocks are located at the approach ends of Runway 3/21, and at midfield, south of Delta taxiway.

1002. SERVICES AND FACILITIES

1. Ramp Space. Visiting aircraft ramp space is extremely limited and prior permission is required (PPR) for transient aircraft. Contact Flight Clearance at (760)725-8016.

NOTE: DUE TO LIMITED RAMP SPACE, HANGARS AND ADMINISTRATIVE SPACES, MCAS CAMP PENDLETON CANNOT HOST DETACHMENT TRAINING. UNITS DESIRING TO CONDUCT TRAINING AT MCAS CAMP PENDLETON MUST CONTACT MARINE AIRCRAFT GROUP 39 OPERATIONS DEPARTMENT AT (760) 725-4025 FOR FEASIBILITY OF MAG-HOSTED SUPPORT.

2. Fuel. Only JP-5 is available. Refueling/Defueling is conducted on a first-come, first-served basis during regularly scheduled fuel hours. Fuel hours do not coincide with scheduled airfield hours and should be confirmed by calling Flight Clearance at (760) 725-8016. Tenant squadrons requesting fuel outside of scheduled hours must submit their request through MAG-39 Operations. Qualified Squadron personnel or Aircrew (both tenant and transient) are responsible for operating the nozzle when refueling their aircraft.

a. Hot Refueling (No PPR Required). The Hot Refueling Pits are located northwest of the departure end of Runway 21. Hot refueling is normally available two hours after the airfield opening until two hours prior to the airfield closing.

b. Cold Refueling (PPR Required). Cold refueling is normally available from one hour prior to the airfield opening until the airfield closing (except on Mondays and Fridays) and should be coordinated with Airfield Operations. When the airfield is open, cold refueling may be requested from the MCAS Camp Pendleton Fuel Division through Flight Clearance on UHF 265.0. Cold refueling is conducted on a first-come, first-served basis during regularly scheduled fuel hours. Requests for priority cold refueling must be submitted to MCAS Camp Pendleton Operations. MAG 39 Squadrons will submit requests for priority cold refueling via MAG-39 Operations. When the airfield is closed, cold refueling is not available unless prior coordination has been conducted and approved at least 72 hours in advance. Qualified Squadron personnel or Aircrew (both tenant and transient) are responsible for operating the nozzle when refueling their aircraft.

CAUTION: AIRCRAFT SHALL TAXI AND PARK NO CLOSER THAN 50' TO THE COLD REFUELING TRUCK WHEN COLD REFUELING OPERATIONS ARE IN PROGRESS. AIRCRAFT TAXIING INTO THE CALA TO CONDUCT HOT TUBE LOADING SHALL PARK NO CLOSER THAN 300' (3 SPOTS IN BETWEEN, IE. SPOT 3 AND 7) TO THE COLD REFUELING TRUCK WHEN COLD REFUELING OPERATIONS ARE IN PROGRESS. COLD REFUELING WILL CEASE IF ANY HOT TUBE LOADING COMMENCES WITHIN 300' RADIUS OF THE REFUELING TRUCK.

c. Defueling. Only JP-5 fuel can be defueled at MCAS Camp Pendleton. Defueling service is available upon request through the MCAS Camp Pendleton Fuel Division during airfield operating hours. Per NAVAIR 00-80T-109 tenant squadrons shall submit a Defuel Authorization letter, signed by the squadron CO, on a quarterly basis. Qualified squadron personnel/aircrew will act as nozzle operators. Once the presence of bubbles in the defuel stream is detected, the defuel operation will cease as damage can occur to tanker equipment if the pump cavitates.

d. Concurrent Fueling. IAW reference (a) concurrent refueling, cargo loading, and cargo off-loading in logistical airlift operations is authorized when minimum ground time is required to support military operations.

Concurrent fueling Operations must be coordinated through Flight Clearance at (760) 725-8016.

CAUTION: AUTHORIZATION TO CONDUCT CONCURRENT REFUELING SHALL NOT INCLUDE THE LOADING AND UNLOADING OF CLASS A AND B EXPLOSIVES BUT CAN INCLUDE REFUELING WITH EXPLOSIVE CARGO PREVIOUSLY LOADED AND SECURED ONBOARD. ALL REFUELING OF EXPLOSIVE LADEN AIRCRAFT (NO LARGER THAN C-130) WILL BE IN THE CALA.

When concurrent operations are being conducted, the Aircraft Rescue and Fire Fighting (ARFF) Crew Leader shall be the designated person in charge of each operation or Quick Service Supervisor (QSS).

The following procedures and precautions SHALL be adhered to:

(1) ARFF shall be notified at least 15 minutes prior to commencement of concurrent servicing operations. The number of passengers/patients on board the aircraft shall be included in the notification (NAVAIR 00-80R-14 Figure 3-3)

(2) All vehicles to be operated within a 50-foot radius of the refueling point shall be equipped with spark arrestors and designated in advance.

(3) Appropriate size and type fire extinguishers as recommended by NAVAIR 00-80R-14 shall be in the immediate vicinity.

(4) A major ARFF vehicle shall be positioned at the aircraft when passengers or patients remain onboard during concurrent refueling operations.

(5) When passengers or patients are permitted to remain onboard, necessary ramps (unobstructed) shall be in proper position to permit evacuation.

(6) Major aircraft maintenance repair work and liquid oxygen servicing shall not be permitted during refueling.

(7) A communication system (radio vehicle or other effective means) shall be maintained to permit QSS to contact the stand-by alert crash truck in the event of an emergency.

(8) A clear path shall be maintained around the aircraft being serviced.

(9) The refueling operation will not commence until the aircraft crew chief, the refueling truck personnel and the QSS concur that the operation can commence.

e. FUEL PROCEDURES FOR GROUND SUPPORT EQUIPMENT (GSE). GSE fuel issue days are Monday, Wednesday, and Friday from 1030-1130L and 1400-1500L only. Squadrons requesting GSE fuel service should call the Fuel Dispatcher at 725-3430. All GSE requiring fuel should be staged in front of the hangar and ready for refueling. Squadron personnel must be present to fuel the vehicles wearing all appropriate PPE. When the airfield is closed, GSE refueling is not available.

3. Auxiliary Power Units (APU). MCAS Camp Pendleton has no auxiliary power units. Requests for APU's can be coordinated through Marine Aircraft Group 39.

4. Flight Planning. Flight planning facilities are in building 2399, Airfield Operations. Services include area FLIP navigational charts and publications, NOTAM service, flight monitoring, flight plan filing, and communications with the National Aerospace Data Interchange Network (NADIN) and San Diego Flight Services Station (SAN FSS). Flight planning forms, Visual Flight Rule (VFR) route pamphlets, and Standard Instrument Departures (SIDS) can be obtained from Flight Clearance, which is open from one hour prior to scheduled airfield opening until airfield closure.

5. Customs. There are no internal Customs Services available on the Air Station. Aircrew must request customs service at least 24 hours prior to arrival with Flight Clearance at (760)725-8016.

6. Meteorology and Oceanography (METOC) Service. The Weather METOC Service Office is in building 2399. Forecasters are available during published airfield hours for forecast of the local area to include Terminal Aerodrome Forecast (TAF), daily maximum ambient temperatures, current observations, and various other forecast products. During the published airfield hours, MCAS Camp Pendleton personnel will complete flight weather briefs. During airfield closure, phones will be forwarded to the Regional METOC Center - West (RMC-W) located at MCAS Miramar (858)307-1533. RMC-W personnel will provide all METOC support during MCAS Camp Pendleton airfield closures.

a. Weather information and Flight Weather Briefs may be requested primarily by the Flight Weather Briefer website <https://fwb.metoc.navy.mil>, phone, or in person. VFR stamp service is available for flights which can be executed under VFR conditions. Pilots may coordinate an extension of the weather brief through Air Traffic Control.

b. Requests for weather briefings in support of unit deployments should be submitted to RMC-W Miramar or 3D MAW METOC at least 48 hours in advance.

c. Climatology and astronomical data may be obtained upon request. For mean average data and average seasonal weather information, refer to the MCAS Camp Pendleton Astronomical/ Climatological Data Booklet.

d. Daily forecast information and astronomical data may be found on the RMC website at https://usmc.sharepoint-mil.us/sites/mciwest_miramar/s3/WEATHER/SitePages/LearningTeamHome.aspx

e. In-flight weather information is available on "Camp Pendleton Metro" during airfield hours; UHF 342.4.

7. Compass Rose. A Compass Rose is located on the north end of the North Ramp. The compass rose is on a first come, first served basis for use.

8. Aircraft Rinse Facilities (Bird Bath). An aircraft rinse facility is located north of the Foxtrot 1 Taxiway, adjacent to the Papa Taxiway. The magnetic sensor at the south edge of the wash area must be activated prior to entering the rinse facility.

Wash Cycle Steps:

(a) Approach the Rinse Facility from the West and taxi slowly over the sensor cable in the pavement.

(b) Proceed slowly into the facility. The wash spray should begin 30 seconds after crossing the sensor.

(c) Taxi slowly through the facility to allow complete wash of the aircraft. Spray time is 90 seconds.

(d) Exit the facility to the East.

(e) Trailing aircraft must wait 5minutes after the wash cycle is complete before crossing the sensor for the next cycle.

9. Passenger and Air Freight Operations. Limited facilities are available for serving passengers and handling air freight. These operations must be coordinated in advance with Airfield Operations (Refer to Chapter 6).

a. Administrative Passengers. Passengers arriving and departing on Operational Support Aircraft (e.g., C-12, C-20, C-35, and C-40 aircraft) shall be processed by the Flight Clearance Section, building 2399, and will embark and disembark on the Visiting Aircraft Line.

b. Large Passenger Aircraft. Aircraft with seating for ten or more passengers conducting administrative passenger operations shall coordinate with Airfield Operations for parking.

c. Baggage. Baggage handling service is not available.

d. Air Freight. No facilities are available for air freight. Units desiring to ship air freight through MCAS Camp Pendleton must provide the means to do so.

e. Ground Transportation. MCAS Camp Pendleton has no on-base transportation available for aircrew or passengers.

f. Billeting. Billeting can be coordinated through the MCB Camp Pendleton Billeting Office at (760)430-4702 or DSN 365-3346.

g. Messing. Messing is available at various mess halls aboard MCB Camp Pendleton.

h. Tactical Troop and Cargo Lifts. Tactical troop lifts, cargo lifts and paraops may be conducted with prior coordination with Airfield Operations (760)725-8016.

i. Very Important Person (VIP) Lifts. VIP lifts from the passenger terminal require all supporting aviation units (including tenant units) to acquire a PPR with flight clearance at (760)725-8016. VIP information is passed to ensure appropriate honors are afforded to the VIP.

j. Space Available. Very limited space available travel is available from MCAS Camp Pendleton. For Space-A information and requirements, contact Flight Clearance at (760)725-8016.

k. Ordnance Operations. Refer to paragraph 5001 of this Manual.

l. Lavatory Service. There is no lavatory service at the airfield.

m. Cargo Service and Equipment. There is no cargo service, nor cargo handling equipment available at the airfield. Cargo support should be requested through the supported unit.

1003. AIRFIELD LIGHTING. Runway lights are turned on for night operations, except during scheduled Night Vision Devices (NVD) Training (see NOTAMS). Runway Approach Lights and the rotating beacon are turned on during Instrument Meteorological Conditions (IMC). When the airfield is closed, the Pilot Controlled Lighting (PCL) system can be activated by using UHF 340.2 or VHF 128.775. The PCL system allows aircrew to turn on the runway and taxiway lighting during Closed Tower Operations. Obstruction lights are always on.

1. Runway. The runway is equipped with edge lights and threshold lighting. Intensity is controlled by the tower and may be adjusted upon request. A short approach landing system with sequenced strobe lights, type A2, is installed on the approach end of Runway 21. Precision Approach Path Indicator lights are located at the approach ends of both runways.

2. Runway Distance Markers. Lighted distance markers are located every 1000 feet along the runway.

3. Taxiways. Taxiways are equipped with blue lights.

4. Rotating Beacon. The rotating beacon is identified by alternating flashes of two white and one green light. The beacon is located approximately 1500 meters east of the airfield at an elevation of 290' MSL. The beacon is operational when the airfield is IMC and during night operations.

5. Obstructions. Obstructions on or near the airfield are marked with red obstruction lights.

1004. COMMUNICATIONS FACILITIES

1. Automatic Terminal Information Service (ATIS). During airfield operating hours, ATIS is updated hourly, or as required. It provides current, routine airfield information to departing and arriving aircraft by a means of a continuous broadcast on UHF 285.45. During initial contact with Ground or Tower, pilots shall advise Air Traffic Control (ATC) that current ATIS information has been received. When the airfield is closed, automated weather information is available by dialing (760)725-9838.

2. Pilots to Forecaster Service (METRO). Camp Pendleton Metro service is available on UHF 342.4.

3. Base Operations/Command Post. Pilots can coordinate with Airfield Operations on UHF 279.3.

4. Squadron UHF Base Radios. Tenant squadrons shall notify the air station Air Traffic Control Maintenance Division (ATCMD) for all matters requiring maintenance of the UHF base radios. ATCMD point of contact during hours of operation is (760)725-0684 and after hours is (760)207-2528.

5. Electronic Testing/Tuning. To prevent interference with ATC communications, equipment testing/tuning of transmitters must be coordinated with Air Station ATCMD.

1005. NAVIGATIONAL AIDS

1. Camp Pendleton TACAN. The airfield is located on the 032 radial at 2 NM from the NFG TACAN Channel 55X. It operates continuously.

2. Oceanside VORTAC. The airfield is located on the 028 radial at 5 NM from the Oceanside VORTAC, VOR VHF 115.30/TACAN Channel 100X (OCN).

3. Radar Ground Controlled Approach (GCA) Services. Airport Surveillance Radar (ASR) and Precision Approach Radar (PAR) approaches are available. Aircraft may request radar services through San Diego Approach on 323.0/127.3, through Camp Pendleton Tower on 340.2/128.775, or by calling Camp Pendleton Arrival on 236.3/128.45.

NOTE: THE PAR IS OUT OF SERVICE EVERY MONDAY FROM 1300-1700L (WEATHER PERMITTING) FOR ROUTINE MAINTENANCE.

1006. REPORTING NEAR MIDAIR COLLISIONS (NMAC). MCAS Camp Pendleton Airfield Operations and Safety shall be notified immediately through Camp Pendleton Tower on 340.2/128.775 of a NMAC within the air station's Class D, E, or LIMA airspace. NMAC's will be reported in accordance with references (a) and (b).

1007. THINGS FALLING OFF AIRCRAFT (TFOA). The Air Station Deputy Operations Officer at (760)763-5275 and Safety Officer at (760)763-8709 shall be notified of a TFOA incident within MCAS Camp Pendleton's Class D, E, or LIMA airspace. Aircraft custodians will comply with reporting requirements outlined in reference (b) and (c).

1008. VIOLATIONS OF REGULATIONS. Violations of provisions of this Manual may result in damage, injury, or loss of life and may be punishable under the Uniform Code of Military Justice. Personnel witnessing a suspected violation of flight regulations shall report the violation to the Air Station Operations Officer at (760)725-8387. The Air Traffic Control Facility Officer (ATCFO) will assist the Air Station Operations Officer in the investigation of each incident. If a flight violation has occurred, the MCAS Camp Pendleton Air Station Operations Officer shall forward an initial report of inquiry, along with recommendations, to the Commanding Officer, MCAS Camp Pendleton, for action.

1009. BIRD/ANIMAL AIRCRAFT STRIKE HAZARD (BASH)

1. All bird activity that may create a potential or actual hazard to flight shall be reported to MCAS Camp Pendleton Tower. MCAS Camp Pendleton Tower will relay these known hazards to all aircraft under its control and will continue reporting until it is no longer a factor. The control tower will also notify Flight Clearance who will expeditiously notify Weather, tenant squadrons, and the MCAS Camp Pendleton Environmental Department.

2. During periods of intensive bird activity, this information will be broadcast via ATIS. Thirty Day BASH history will be noted on the MCAS Camp Pendleton Daily Brief Sheet.

1010. ELECTRONIC TESTING/TUNING

1. Maintenance radio checks should be accomplished on assigned unit radio frequencies.

2. If an assigned frequency is unavailable, radio checks may be conducted with Ground Control on UHF 360.2/VHF 128.775 under the following conditions:

a. If maintenance personnel monitor the frequency prior to initiating call to ensure the frequency is not busy.

b. If maintenance personnel secure the radio checks immediately upon being instructed to do so by Ground Control.

3. Emergency Locator Transmitter (ELT) Equipment Testing.

a. Operational ELT testing should only be during the first five minutes after any hour (i.e. 0700-0705, 1500-1505, etc.) and should be no longer than three audible sweeps. Inadvertent activation of ELT equipment causes the San Diego Coast Guard and local air traffic control facilities to be alerted.

b. Operational testing other than the first five minutes of each hour should be done in shielded rooms, special containers, or coordinated with the MCAS Camp Pendleton tower through Flight Clearance at (760) 725-8016 prior to commencing test.

THIS
PAGE
INTENTIONALLY
LEFT
BLANK

AIRFIELD OPERATIONS MANUAL

CHAPTER 2

FLIGHT PLANNING

	<u>PARAGRAPH</u>	<u>PAGE</u>
GENERAL	2000	2-2
FLIGHT PLAN AUTHORITY	2001	2-2
DEFINITIONS	2002	2-2
FLIGHT PLANNING/APPROVAL PROCEDURES	2003	2-2
CLOSING OF FLIGHT PLANS	2004	2-3
FLIGHT FOLLOWING	2005	2-4
SPRAY DOWN/WET DOWN	2006	2-4
WEATHER MINIMUMS	2007	2-4
WEATHER BRIEFING	2008	2-4
WEATHER WARNINGS	2009	2-5
MANIFEST REQUIREMENTS	2010	2-6

AIRFIELD OPERATIONS MANUAL

CHAPTER 2

FLIGHT PLANNING

2000. GENERAL

1. Policy. Flight operations at MCAS Camp Pendleton shall be conducted per reference (b), Federal Aviation Administration (FAA) Directives, Flight Information Publications (FLIPS), and this Manual.

2. Facilities. Flight Planning, Weather, and Air Traffic Control services are available in the Airfield Operations building, building 2399 during hours of Operation.

2001. FLIGHT PLAN AUTHORITY. Flight approval authority is governed by reference (b).

2002. DEFINITIONS

1. DD-1801, Military Flight Plan. A signed DD-1801, filed per this Manual and reference (b), is required for other than local flights. Unsigned DD-1801's will not be processed by Flight Clearance.

2. Daily Flight Schedules. The daily flight schedule is authorization for a flight to be conducted under VFR conditions within the local flying area.

2003. FLIGHT PLANNING/APPROVAL PROCEDURES

1. The Flight Clearance Section shall be manned one hour prior to the opening of the airfield.

2. The airfield Daily Brief Sheet shall be emailed to tenant squadrons by Flight Clearance daily.

3. Flights originating at MCAS Camp Pendleton must have a signed authorized flight plan on file with MCAS Camp Pendleton Flight Clearance prior to departure. This flight plan must be received at least two hours prior to the estimated time of departure and closed out upon termination of the flight at the destination airfield. No flight plan shall be submitted to Flight Clearance with a proposed time of departure after the scheduled airfield closure unless Closed Tower Operations permission has been granted.

4. Because FLIPS are on limited distribution to the Air Station, Flight Clearance can only provide them to transient aircrews as available.

5. The following types of flight plans are authorized:

a. DD-1801, Military Flight Plan. A DD-1801 will be prepared and signed by the pilot in command per reference (b). Although included on the flight schedule, aircrew on cross country flights must file a DD-1801 and obtain a weather brief. A cross-country flight is a flight conducted out of the local flying area or a flight within the local flying area with scheduled landings or termination at another airfield.

b. Daily Flight Schedules. Tenant aircraft are cleared for flight when listed on the daily flight schedule. Although included on the flight schedule, aircraft on cross country flights must file a DD-1801 and obtain a Flight cross country brief from METOC.

(1) Tenant squadrons will deliver a copy of the next day's flight schedule to MCAS Camp Pendleton Flight Clearance via email at the Global Access List: mcascpen.fltclr@usmc.mil.

(2) Amendments to the flight schedule shall be forwarded to MCAS Camp Pendleton Flight Clearance as soon as possible.

(3) Flight plans will be canceled one half hour after estimated time of departure unless the pilot contacts ATC or the squadron notifies the Flight Clearance section of the revised ETD.

(4) MV-22 Routes (Appendix L) will be annotated under notes for each flight on the tenant unit's daily flight schedule. Flight Clearance will input the flight plans no earlier than two hours prior to the flight.

(5) MCAS Camp Pendleton Flight Clearance will distribute the MCAS Camp Pendleton Daily Brief Sheet daily via e-mail. Contact flight clearance at 760-725-8016 to be added to the distribution list or to request copies of the current Daily Brief Sheet.

c. Standard Instrument Departure (SID) Procedures. The four SIDs for MCAS Camp Pendleton ("Quintin," "Bulldog" "Corri and "Munn") are published in the FLIP, Vol 4.

d. LOA/Preferred/MV-22 Routes. See appendix L for Letter of Agreement, Preferred and MV-22 Routes.

6. Shore-to-Ship Flights. Ships off the coast of Southern California are not supported by a Flight Service Station. Accordingly, flight plans must be processed via the Fleet Area Control Surveillance Facility (FACSFAC). Aircraft movement messages for flights originating from MCAS Camp Pendleton will be passed by Flight Clearance via land line to FACSFAC. Aircraft conducting shore-to-ship flights shall file with MCAS Camp Pendleton Flight Clearance and provide the same information required for IFR Flights, including the ship's tactical call-sign, if available.

7. Preflight Planning. Pilots shall receive a complete weather briefing and check NOTAMS prior to filing a signed DD-1801.

2004. CLOSING OF FLIGHT PLANS

1. Responsibility. Closing out a flight plan is the responsibility of the pilot-in-command. This can be accomplished by notifying a military control tower, Air Station Flight Clearance, or FAA Flight Service Station. A flight plan should not be closed out with an Air Route Traffic Control Center, Approach Control Facility, or a Tactical Ground Radar Facility. These facilities are not obligated to notify an aircraft's point of departure or destination of any routing changes or flight termination.

2. Normal Hours of Operation. When the airfield is open, flight plans will normally be closed out by tower upon landing. As a precaution and to preclude overdue aircraft action, pilots should confirm with ground control that their flight plan has been closed.

3. Closed Tower Operations

a. When the air traffic control tower is closed, flight plans shall be activated and closed with San Diego Flight Service Station (SAN FSS). After takeoff or just prior to landing, pilots shall contact SAN FSS on 255.4 UHF/122.4 VHF. If unable to contact SAN FSS over the radio, pilots may either contact their Squadron Duty Officer prior to takeoff or after landing to activate or close their flight plan by telephone 1-800-WX-BRIEF (992-7433). Chapter 3 contains detailed Closed Tower Operating instructions.

b. Flight plans filed with Flight Service shall, in the remarks, list the telephone number of the Squadron Duty Officer to help identify a point of contact when the airfield is closed.

2005. FLIGHT FOLLOWING. Responsibility for initiating action on overdue aircraft rests with the destination facility. Although an estimated time of return is designated for each local flight on the daily flight schedule, the pilot in command should advise his Squadron Duty Officer, ATC, and an appropriate FSS of any change in the scheduled return time. Local flights remaining overnight at another station should advise Ground Control of intentions and estimated time of return. Squadrons are responsible for initiating action for overdue local flights and must immediately notify ATC. Aircraft are considered overdue 30 minutes beyond Estimated Time of Arrival/Estimated Time of Return.

2006. SPRAY DOWN/WET DOWN. The use of a fire apparatus where the pumps are engaged, and water is discharged for final flight "Spray Down" or any other ceremonial purposes is not authorized. The misuse of fire apparatus' increases unnecessary risk to personnel and poses potential environmental and health hazards due to the possible release of Perfluoro octane Sulfonate (PFOS) and Perfluorooctanoic Acid (PFOA) contained within the apparatus.

2007. WEATHER MINIMUMS

1. VFR Minimums. VFR minimums for MCAS Camp Pendleton are a ceiling not less than 1000' AGL and visibility not less than three statute miles.

2. Special VFR (SVFR). See paragraph 3012.

3. IFR Minimums. When the ceiling and/or visibility is less than 1000' AGL or three statute miles, flight operations shall be conducted per IFR procedures, unless operating on an SVFR clearance. Minimums for IFR departures and arrivals are contained in reference (b) and current FLIP publications.

4. Closed Tower Weather Minimums. Aircraft shall not operate to or from MCAS Camp Pendleton, in accordance with VFR Course Rules, when the tower is closed unless the weather is VMC (ceiling at or above 1000' AGL and visibility three statute miles or greater). Closed Tower Operations under IFR conditions must meet instrument requirements as listed in reference (b) and current FLIP publications.

2008. WEATHER BRIEFING

1. Pilots filing a flight plan and/or a combination IFR/VFR flight plan must have a completed and signed DD-1801.

2. The primary way to obtain a flight weather briefing is through the Flight Weather Briefer (FWB) website <https://fwb.metoc.navy.mil>. During published field hours briefs will be completed by MCAS Camp Pendleton METOC personnel. During field closures, briefs will be completed by the RMC-W aboard MCAS Miramar in accordance with MCIWEST-MCBCAMPO 3140.1 - MCI-W METOC Operations ref (j). Pilots requesting an Over-the-Counter brief will receive a completed brief either from the RMC-W or MCAS Camp Pendleton with an assigned flimsy number. Pilots requesting a flight weather brief via telephone from either MCAS Camp Pendleton, or the RMC-W may receive a verbal briefing, on a case-by-case basis in extreme circumstances only.

3. The pilot is responsible for completing the form when the weather briefing is conducted via telephone. Pilots requesting a weather brief must submit a completed DD-1801 Flight Plan to Weather primarily through FWB or in person. Upon completion of the DD-1801, the pilots will deliver a signed DD-1801 to Flight Clearance for authorization and filing purposes.

2009. WEATHER WARNINGS

1. The RMC-W aboard MCAS Miramar issues warnings and advisories for wind and unique weather phenomenon within 25 nautical miles and the local flying area.

2. Tenant and transient aircraft commanders should be aware of the dangers associated with the issuance of thunderstorm warnings for the local area.

3. Thunderstorm Warnings. RMC-W will issue three types of thunderstorm warnings depending on proximity to MCAS Camp Pendleton. The three pertinent warnings and required actions are described below.

a. Thunderstorm Advisory is issued when thunderstorm activity is expected outside the local area, within 50 nautical miles of the Air Station and expected to move towards the Air Station. Thunderstorm advisories are issued to provide situational awareness for aircrew.

b. Thunderstorm Condition II indicates there are thunderstorms occurring or forecast to occur within six hours or 25 nautical miles of MCAS Camp Pendleton.

c. Thunderstorm Condition I indicates thunderstorms are imminent or are occurring within 10 nautical miles of MCAS Camp Pendleton.

(1) All ordnance operations shall cease whenever lightning is detected within 10 nautical miles of MCAS Camp Pendleton.

(2) All fuel operations shall cease whenever lightning is detected within 5 nautical miles of MCAS Camp Pendleton.

(3) Fuel and ordnance operations may only commence once lightning activity has moved at least 5 to 10 nautical miles away from MCAS Pendleton.

(4) Personnel are not allowed on the flight line and must move indoors.

d. Wind warnings will be issued for the local area when the sustained surface wind is 15 to 33 knots and/or frequent gusts more than 25 knots are occurring or are forecast to occur.

e. High wind warning (gale warning) will be issued when the sustained wind is 34 - 47 knots to occur or are occurring.

(1) Consider moving all aircraft into a hangar when a gale warning is issued.

(2) If aircraft cannot be moved into a hangar, tie down aircraft in accordance with appropriate NATOPS recommendations to minimize damage.

f. Storm warnings will be issued when the sustained wind is 48 - 63 knots to occur or are occurring.

4. Adverse Weather. When weather phenomena are forecast to exceed gale force winds, such as hurricane/typhoon, tornado, and other severe storm systems, the security of aircraft and ordnance shall take priority over all other storm preparation. MCAS Camp Pendleton METOC will provide information regarding pertinent warnings at the approach of hazardous weather. Personnel in the Ordnance compound or CALA will be notified by the CALA emergency telephone.

2010. MANIFEST REQUIREMENT. The aircraft commander of transient aircraft departing MCAS Camp Pendleton carrying passengers shall ensure a complete list of all personnel aboard is filed with Flight Clearance. If the airfield is closed, the manifest should be left with the MCAS Camp Pendleton Duty Office in building 23123. A complete crew and passenger list for each MAG-39 flight will be maintained by the tenant squadron.

THIS
PAGE
INTENTIONALLY
LEFT
BLANK

AIRFIELD OPERATIONS MANUAL

CHAPTER 3

COURSE RULES

	<u>PARAGRAPH</u>	<u>PAGE</u>
GENERAL	3000	3-2
AIRCRAFT PARKING PROCEDURES	3001	3-3
TAXI PROCEDURES	3002	3-3
TRAFFIC PATTERNS AND AUTHORIZED OPERATIONS	3003	3-4
HELICOPTER/TILT-ROTOR VFR REPORTING POINTS	3004	3-8
DEPARTURE PROCEDURES	3005	3-9
VFR DEPARTURE PROCEDURES (HELICOPTER)	3006	3-10
VFR DEPARTURE PROCEDURES (FIXED WING/TILT-ROTOR)	3007	3-11
VFR ARRIVAL PROCEDURES (HELICOPTER)	3008	3-12
VFR ARRIVAL PROCEDURES (TILT-ROTOR)	3009	3-14
VFR ARRIVAL PROCEDURES (FIXED-WING/MV-22 AIRPLANE MODE)	3010	3-15
IFR ARRIVAL PROCEDURES	3011	3-15
HELICOPTER SPECIAL VFR (SVFR) OPERATIONS	3012	3-16
NIGHT VISION DEVICE (NVD) TRAINING	3013	3-17
EMERGENCY PROCEDURES	3014	3-17
SPECIAL USE AREAS	3015	3-19
NOISE ABATEMENT/OVER FLIGHT RESTRICTIONS /QUIET HOURS	3016	3-20
CLOSED TOWER OPERATIONS	3017	3-22
SMALL UNMANNED AERIAL SYSTEMS (sUAS) OPERATIONS	3018	3-26

AIRFIELD OPERATIONS MANUAL

CHAPTER 3

COURSE RULES

3000. GENERAL. MCAS Camp Pendleton course rules are designed to deconflict VFR traffic. The variety of aircraft operating at this airfield and surrounding areas results in complex traffic patterns and procedures. Pilots shall know and comply with these course rules.

1. Positive Control. Aircraft shall contact MCAS Camp Pendleton Tower prior to entering MCAS Camp Pendleton Class D airspace. Clearances issued by the Tower are based upon known or reported traffic and/or airfield conditions. Deviations from the Tower clearances are permitted only in the event of an emergency or when, in the judgment of the pilot, adherence would jeopardize safety. The pilot will notify Tower of any deviations as soon as possible.

2. Responsibility of the Pilot and the Control Tower. The pilot in command is responsible and has final authority for the safe operation of the aircraft. The Control Tower is responsible for issuing clearances and other information necessary to ensure safe and orderly flow of aircraft in Class D airspace. When flying in Visual Meteorological Conditions (VMC), the pilot is responsible for avoidance of other aircraft. Clearances and information issued by the Tower are intended to aid pilots in this responsibility.

3. Unusual Maneuvers. Unusual maneuvers are not authorized within the MCAS Camp Pendleton airspace. This includes fly-bys, high performance takeoffs, or practice of any aerobatic maneuvers.

4. Mid-Air Collision Avoidance. As a means of avoidance, pilots should use landing lights while in the Class D airspace.

5. Landing Zones (LZ). To avoid potential conflict with local pattern operations, aircraft must advise the Tower prior to landing or departing any of the following landing zones within the Class D airspace: LZ-1, 11, 14, 16, 22, 27, 32, 33, LZ Toucan, LZ Pelican and LZ Phoenix.

6. Over Flight Avoidance Areas. Aircraft within the MCAS Camp Pendleton Class D airspace SHALL NOT over fly the Ranch House located just south of centerline of the approach end of Runway 21, the fuel farm, the Naval Hospital, and Edson/Wilcox Range west of the airfield.

a. Aircraft SHALL NOT over fly the Combat Aircraft Loading Area or Arm/De-Arm Area located on the Northern end of the airfield below 500'AGL.

b. Pilots will not over fly other aircraft, equipment, or personnel below 500'AGL.

7. Marine Corps Base (MCB) Camp Pendleton Range Control. MCAS Camp Pendleton is located within the confines of MCB Camp Pendleton. In addition, the majority of the Air Station's class D and E airspace is located within the R2503 Restricted Airspace. MCB Camp Pendleton Range Control, call sign LONGRIFLE is responsible for the scheduling and de-confliction of air and ground operations throughout the MCB Camp Pendleton range complex and the R2503 Restricted Area. Range procedures are discussed in the MCB Camp Pendleton Base Order P3500.1, Range and Training Facilities Regulations.

Several aviation and ground training facilities, to include small arms ranges, impact areas, parachute drop zones and artillery firing points are located within, or underlie, the Air Station's class D/E airspace. In addition, the Air Station and the MCB Range/R2503 share VFR entry and exit points and associated procedures. Close coordination between MCAS Air Traffic Control and MCB Range Control ensures safe de-confliction of aviation and ground operations. Strict compliance with MCB Camp Pendleton Range/R2503 and Air Station procedures ensures the safe and orderly flow of aircraft throughout the shared MCB and MCAS Camp Pendleton airspace and training areas.

8. Mandatory Course Rules Brief. Tenant squadrons returning from a three month or longer deployment and visiting aircrews planning to operate in the local area shall attend a Course Rules Brief given by MCAS Camp Pendleton Air Traffic Control personnel before conducting operations at MCAS Camp Pendleton. Contact MCAS Camp Pendleton Operations at (760)725-0368 to schedule a Course Rules Brief.

3001. AIRCRAFT PARKING PROCEDURES. Aircraft will normally park on designated parking spots or as directed by Ground Control or Visiting Aircraft Line (VAL) personnel. The North Ramp may be utilized for oversized transient aircraft. Pilots are responsible for adequate clearance.

3002. TAXI PROCEDURES

1. General. Pilots shall monitor the ATIS broadcast (285.45) prior to calling for taxi clearance and will advise Ground Control on initial contact of call sign, and receipt of ATIS information. Flight leaders shall advise Ground Control of call signs of other aircraft in their flight. Movement of aircraft on taxiways, runways, and helicopter takeoff/landing areas shall be under positive control of Ground Control or Tower. Aircraft shall not operate at MCAS Camp Pendleton without two-way communications. Pilots are responsible for maintaining safe distances from other aircraft and obstacles during taxi.

2. Large Aircraft Taxi Procedures. C-17 (and larger) aircraft shall taxi via the runway to the North Ramp due to ramp congestion and apron/Papa Taxiway clearance.

CAUTION: DUE TO PAPA TAXIWAY WIDTH AND THE PROXIMITY OF AIRCRAFT ON THE OUTBOARD PARKING SPOTS OF THE APRON DO NOT MEET THE PUBLISHED LATERAL CLEARANCE REQUIREMENTS FOR MV-22 AND C-130 AIRCRAFT. PILOTS MUST USE CAUTION.

3. ATC Clearance. Aircraft requesting IFR clearance should contact Clearance Delivery at 271.6/134.675 at least five minutes prior to taxi to ensure the clearance is on request.

4. Taxi Directors. A qualified taxi director shall direct aircraft into and out of assigned spaces. Aircraft may taxi into parking spaces adjacent to the Papa taxiway without a taxi director if safety is not compromised.

5. Taxi Speed. Aircraft shall taxi at a safe speed, as prescribed by NATOPS Flight Manuals. Taxi speed within parking or congested areas shall allow the pilot to stop the aircraft immediately, if required.

6. Frequency Changes. Frequency changes to and from Tower/Ground Control shall be as directed, or upon reaching the hold short/taxiway/helicopter spot. Departing VFR aircraft shall contact LONGRIFLE when switching from

Tower at an established departure point. Arriving VFR aircraft shall switch from LONGRIFLE to Tower approaching an established point of entry. Aircraft are not authorized to enter Tower controlled airspace without Tower approval. Local operating frequencies are listed in Appendix D.

7. Emergencies. During an emergency, Tower and/or Ground Control will instruct taxiing aircraft to stop and give way to emergency vehicles. Pilots of taxiing aircraft sighting an emergency vehicle with a flashing red light shall hold.

8. Communications Failure. Pilots experiencing communication failures will immediately stop and maintain position on the airfield. The pilot will then exercise extreme caution, turn towards the Tower, flash their landing lights, and wait for a light gun signal from Tower, the airfield operations vehicle or a wingman to provide escort to return to the flight line.

3003. TRAFFIC PATTERNS AND AUTHORIZED OPERATIONS

1. Runway 3/21. The runway is used for departures, arrivals, touch-and-go/stop-and-go landings, low approaches, and practice emergencies.

2. Right/Left Grass. The grass area northwest of the runway is called the Right Grass when landing on Runway 21 and Left Grass when landing on Runway 3. This area is approximately 2500' long and 400' wide and is used for helicopter touch-and-go/stop-and-go landings, low approaches and practice emergencies. Aircraft using adjacent areas of the Right/Left Grass must maintain 200' lateral separation. The threshold to the Right Grass is displaced 2288' from the approach end of Runway 21. The displaced threshold can be identified by the white concrete cylinder on the north side of the grass. Landing prior to this displaced threshold in the Right Grass is not authorized due to the Combat Aircraft Loading Area (CALA) and Ordnance Arming/De-arming Area.

3. Traffic Pattern Procedures. The local pattern is depicted in Appendix E. For Runway 21, the northwest pattern is a right-hand pattern, and the southeast pattern is a left-hand pattern. For Runway 3, the northwest pattern is a left-hand pattern, and the southeast pattern is a right-hand pattern. Breaks southeast of the runway are not authorized below pattern altitude or at night.

<u>a. Pattern Altitudes (MSL)</u>	<u>Northwest</u>	<u>Southeast</u>
Helicopter Pattern	600'	1000'
Fixed-wing/MV-22 Pattern	1100'	1500'
Overhead Break (Helicopter)	1100'	2000'
Low-Break (Helicopter) (By request)	500'	Not Authorized
Overhead Break (Fixed-wing/MV-22)	1600'	2000'

NOTE: MV-22 AIRCRAFT WILL MAINTAIN APPROPRIATE ALTITUDE FOR THE GIVEN OPERATING MODES (AIRPLANE/CONVERSION); MV-22 AIRSPEEDS AS INDICATED IN REFERENCE E ARE 90-120KTS IN CONVERSION MODE AND 180-220 KTS IN AIRPLANE MODE.

b. Practice Emergencies. The pattern and altitude must be specifically requested by the pilot and approved by the Tower.

c. Touch-and-Go. When an aircraft is cleared for a touch-and-go, the aircraft will land and depart without stopping. Request for takeoff clearance is not required.

d. Tilt-Rotor Roll-On/Running Landing. Tilt-Rotor pilots may request roll-on/running landing and shall inform Tower upon initial contact. Pilots practicing an Emergency Landing Procedure Approach are expected to terminate the approach with a roll-on/running landing unless otherwise requested.

e. Stop-and-Go. When an aircraft is cleared for a stop-and go, the pilot will make a complete stop and then commence a take-off from that point after advising Tower that they are "on-the-go."

f. Cleared to Land. Aircraft cleared to land will execute a full stop landing.

g. Crosswind Turns. Crosswind turns shall be commenced abeam/over the upwind numbers, when number one upwind, or as directed by the Tower.

h. Base Turns

(1) Prior to commencing turn to base, contact the Tower on midfield downwind, stating intentions for approval/clearance.

(2) Landing as far upwind as possible will allow other aircraft to make an approach behind the upwind aircraft while providing required separation.

(3) Pilots are responsible to maintain separation and interval on traffic in the pattern, to include the runway, right grass, hold short positions, and low work areas (minimum separation of 200' between helicopters).

(4) Do not over-fly other aircraft or their intended course in the pattern. "Cleared to the duty" is not a clearance over or in front of traffic using the right or left grass.

(5) Passing traffic holding in the grass is authorized after approval from the Tower. Pass traffic to the side away from the runway whenever possible. The pilot is responsible for maintaining a minimum lateral separation of 200'.

i. Option Approach. "Cleared for the Option" allows the option for a touch-and-go, low approach, missed approach, stop-and-go, or full stop landing.

j. Go-around/Wave-off. Go-arounds/wave-offs from the grass will clear traffic ahead on the side away from the runway by making a call to Tower stating intentions. Aircraft being passed will hold their position. Go-arounds/wave-offs issued by the Tower are mandatory.

4. North Grass Area. The North Grass is located between the runway and the parallel taxiway, and between the Bravo and Delta Taxiways (Appendix B). It is used for low work and as a holding area for departing and arriving helicopters. Aircraft will monitor Tower frequency while in the North Grass and will remain abeam the Tower centered between the runway and parallel taxiway. When two helicopters are using the North Grass, one must stay north of the 4,000' distance board (four board) for runway 21 while the other remains south of it. Aircraft operating in this area shall not exceed 50' AGL unless authorized by the Tower.

5. Helicopter Spots

a. Parallel (PAPA) Taxiway Helicopter Spots P-1, P-3 and P-4. These helicopter spots will be utilized primarily for expedited arrivals and departures of H-1 aircraft only. The spots can be requested by a pilot and subsequently approved by ATC. When positioned on the helicopter spot, aircraft will switch from Ground to Tower frequency for departure clearance and will comply with course rules and ATC instructions during departure. Pilots shall communicate their departure intentions to Ground to expedite traffic flow prior to switching to Tower. The PAPA Taxiway is considered a high traffic area, and Tower will only approve single H-1 aircraft landings and departures on PAPA spots 1,3 and 4 on a "not-to-interfere" basis with local pattern and ground operations. PAPA spot 2 is no longer used for aircraft arrivals or departures.

NOTE: AUTO ROTATIONS, TACTICAL APPROACHES AND OTHER HIGH-SPEED LANDINGS ARE NOT AUTHORIZED TO THE HELICOPTER SPOTS

b. Echo 2 & Foxtrot 2 Helicopter Spots. Aircraft may land directly on the Foxtrot 2 helicopter spot when approved by ATC (do not overfly helicopters on Echo 2). When entering the fuel pits, aircraft will switch from the Tower to Ground frequency after crossing the Foxtrot 2 taxiway hold short line, inbound to the hot refueling ramp marshalling line. When departing the hot refueling ramp, aircraft may takeoff directly from the Echo 2 taxiway helicopter spot (do not overfly helicopters on Foxtrot 2) when approved by ATC. Leaving the fuel pits, aircraft will switch from Ground to Tower frequency for departure clearance at the hold short line from the fuel pits to the Echo Taxiway and will comply with course rules and ATC instructions for departure.

NOTE: WHEELED HELICOPTERS WILL LAND ON THE RUNWAY AND TAXI ONTO FOXTROT 2 FOR THE FUEL PITS, UNLESS SPECIFICALLY DIRECTED OTHERWISE BY THE TOWER.

c. Emergency Landing Pad (ELP). The ELP is located between Echo 2 and Foxtrot 2 taxiways in between the runway and the fuel pits (see appendix K). The purpose of the ELP is for use by any helicopter in an emergency and for MV-22 emergency landings with hung gear.

NOTE: THE ELP SHALL NOT BE USED FOR LOW WORK OR FIELD CARRIER LANDING PRACTICE (FCLP).

6. Special Operations

a. Practice Precautionary and Simulated Emergency Approaches. Tower must approve practice precautionary approaches and simulated emergency approaches to the airfield.

b. Hoist and External Weights. Hoist and external weight training is not authorized at the airfield.

c. Parachute Operations. Parachute drops below 2600' AGL within Class D airspace will be conducted under the control of the Tower. Initial contact with the Tower will be made for clearance into the airspace and again for each drop clearance. Aircraft will maintain contact with the Tower until the mission is complete. The Tower will provide traffic advisories and de-confliction for parachute drop aircraft. Drops above 2600' AGL are under the control of LONGRIFLE. Aircraft should monitor Tower and emergency frequencies for advisories.

NOTE: PARACHUTE OPERATIONS FROM THE AIRFIELD ARE NOT AUTHORIZED WHEN THE CONTROL TOWER IS CLOSED.

(1) DZ Basilone. DZ Basilone is located 1 NM south of the intersection of Basilone and Roblar Roads, NFG TACAN 335 radial at 3.0 NM. When parachute drops are conducted at DZ Basilone, fixed-wing aircraft shall use the southeast traffic pattern.

(a) When DZ Basilone is active, Camp Pendleton Range Control, call-sign LONGRIFLE, will close Point Intersection.

(b) The Tower will not permit aircraft to cross the DZ Basilone parachute drop run-in line when parachute drop aircraft are inbound or when parachutes are in the air. The Tower will direct aircraft to hold north of Point Intersection or use an alternate route into the airfield (North Initial, Point Canyon, or Landing Craft Air Cushion (LCAC)).

(2) DZs Fallbrook and Morro Hill. When parachute operations are being conducted at DZ Fallbrook or Morro Hill (four miles east of the airfield), non-participating aircraft shall avoid the DZ by at least 2 NM.

d. Punchbowl. The Punchbowl is located 2 NM south of the airfield in the Ysidora Basin area and includes the LZ Phoenix and Mike TERF Route. Operations in the Punchbowl must be approved by the Tower and are normally limited to the use of CAL Sites 1 and 2, external weight and hoist operations, functional check flights, and TERF/LZ Phoenix operations.

(1) When the airfield is open, aircraft shall monitor both LZ Phoenix common (254.95) and Tower frequencies while operating in the area. When the airfield is closed, aircraft operating in the LZ Phoenix shall monitor both LZ Phoenix common and LONGRIFLE for traffic advisories.

(2) Upon completion of work in the Punchbowl, aircraft will depart the Punchbowl by climbing to no higher than 500' AGL while maneuvering to obtain radio communication with the Tower. Contact the Tower for entry into the local pattern via a left downwind for Runway 21 or a right base for Runway 3. Aircraft conducting operations at the LZ Phoenix shall comply with procedures outlined in the LZ Phoenix Letter of Agreement reference (d).

WARNING: DIRECT ENTRY INTO THE PATTERN VIA THE PUNCHBOWL IS NOT AUTHORIZED. THE PUNCHBOWL UNDERLIES THE MCAS CAMP PENDLETON GCA PATTERN. DO NOT CLIMB ABOVE 500' AGL UNTIL CLEARED TO DO SO BY TOWER.

(3) When the Tower is closed, aircraft shall contact LONGRIFLE for clearance to enter the LZ Phoenix, monitor Long Rifle, and make advisory calls in the blind on LZ Phoenix frequency.

WARNING: MCAS CAMP PENDLETON'S CLASS D AND E AIRSPACE IS ONLY IN EFFECT DURING THE HOURS WHEN THE CONTROL TOWER IS OPERATIONAL. LZ PHOENIX IS LOCATED IN UNCONTROLLED AIRSPACE WHEN THE TOWER IS CLOSED. NON-TENANT AND CIVIL AIRCRAFT MAY TRANSIT THROUGH THE AREA WITHOUT WARNING.

e. Mike TERF Route. The Mike TERF Route is located south of the airfield within the Class D Airspace. When the airfield is open, aircraft using this route must request clearance from the Tower and call when clear. When the airfield is closed, notify LONGRIFLE of intent to utilize the Mike TERF Route.

WARNING: MAXIMUM ALTITUDE IN THE PUNCHBOWL IS 500' AGL; THE GCA TURN TO DOWNWIND OVERLIES THE PUNCHBOWL.

7. Post Maintenance Functional Check Flights

a. Helicopter Hover Checks. The North Grass (Appendix A) is normally used for hover checks. Aircraft will remain centered between the runway and parallel taxiway. Hover checks will not exceed 50' AGL unless approved by the Tower. The Tower may direct pilots to the Right/Left Grass for hover checks if hover checks in the North Grass create an apron FOD issue.

b. Fixed-Wing Ground Test. Jets and prop aircraft with more than two engines must conduct high power run-ups on the runway. Exceptions are made only with prior approval by Airfield Operations. UC-12/UC-35 type aircraft may conduct run-ups at the hold short line serving the duty runway.

c. In-flight Test Areas

(1) The Punchbowl area may be used by helicopters/tiltrotors for inflight checks. Tower shall be monitored while operating in this area.

(2) Aircraft may conduct flight checks in R2503A and R2503B after contacting LONGRIFLE for clearance.

(3) Closed Tower functional check flights are authorized with a CTO PPR.

8. Functional Ground Check Procedures

a. Engine testing and high-power turn-ups shall not be conducted between 2200L and 0700L.

b. Squadrons conducting Closed Tower ground turns will contact the ARFF Dispatcher at (760)725-4707/8382 or 320.2 prior to engine start.

3004. HELICOPTER/TILT-ROTOR VFR REPORTING POINTS. The following VFR reporting points will be used upon entry into or exit from MCAS Camp Pendleton Class D Airspace (See Appendix A).

1. Do not proceed inbound unless communication with the Tower has been established.

2. Landing Craft Air Cushion (LCAC) Facility. The LCAC facility, NFG TACAN 249/2.3, is an inbound VFR/SVFR reporting point.

3. Marine Air Support Squadron 3 (MASS-3). MASS-3, NFG TACAN 324/0.5, is the structure and LZ on the ridgeline, 2.2 miles from the center of the runway. MASS-3 is an intermediate reporting point inside of the Class D airspace.

WARNING: THE MASS-3 RIDGELINE HAS NUMEROUS OBSTRUCTIONS, INCLUDING THE NFG TACAN AT APPROXIMATELY 500 FT MSL, AND POWER LINES AT APPROXIMATELY 719' MSL.

4. VORTAC. The Oceanside VORTAC, NFG TACAN 210/2.3 (OCN CH 100/VOR 115.30), is an outbound VFR/SVFR reporting point.

WARNING: CIVILIAN SKYDIVING OPERATIONS WILL BE IN PROGRESS EVERY WEDNESDAY THROUGH SUNDAY AT OCEANSIDE MUNICIPAL AIRPORT (OKB) DURING DAYLIGHT VFR. DEPARTURE TRACK FROM OKB IS WESTBOUND CLIMBING OVER THE OCEAN, THEN INBOUND

FROM 6 MILES OFFSHORE DIRECT TO OKB. MAX ALTITUDE 13,000'. DROP ZONE AT OKB. DROP CALLS ARE BROADCAST ON FREQUENCY 127.3.

5. Intersection. The Basilone/Roblar Road intersection, NFG TACAN 360/5.0, is an inbound/outbound VFR and SVFR reporting point.

WARNING: BASILONE/ROBLAR ROAD INTERSECTION IS CLOSED WHEN PARAOPS ARE BEING CONDUCTED AT DZ BASILONE. CONTACT LONGRIFLE FOR STATUS PRIOR TO ENTERING.

6. Point Canyon. Point Canyon, NFG TACAN 017/6.7, is the confluence of the DeLuz and Santa Margarita Rivers. It is an inbound/outbound VFR and SVFR reporting point.

7. North Initial. North Initial, NFG TACAN 032/9.0, is the Fallbrook Naval Weapons Station water tower. Maintain a minimum of 500' AGL over the weapons station and avoid the Fallbrook Airpark VFR traffic pattern (1700' MSL) entirely. North Initial is an inbound Runway 21, outbound Runway 3 VFR and SVFR reporting point.

8. Lake O'Neil. Lake O'Neil, NFG TACAN 032/4.8, is an intermediate reporting point inside of the Class D airspace.

9. Morro Hill. Morro Hill, NFG TACAN 062/6.2, an outbound reporting point on the Morro Hill departure.

3005. DEPARTURE PROCEDURES

1. Initial Contact. Before taxiing onto the runway or onto an authorized takeoff area, pilots shall state their position on the airfield and departure intentions. Do not proceed onto the runway until clearance is received from the Tower.

2. Takeoff Clearance. Pilots shall obtain a takeoff clearance from the Tower before departing any authorized operating area. Clearance into position does not constitute authorization to takeoff. "Line up and wait" instructions from the Tower must be repeated in acknowledgment. Helicopter departures from MCAS Camp Pendleton shall comply with course rules, and pilots should advise the Tower of departure intentions during initial contact.

3. Clearance Delay. When accepting clearance for takeoff, pilots are expected to depart without delay. If the pilot intends to delay before takeoff, notify the Tower to provide time for pattern adjustment or clearance amendments.

4. Area Avoidance. Aircraft departing the airfield must avoid over-flying the ordnance buildup area, Arm/De-arm area and CALA (when in use), Ranch House, Old Naval Hospital, Base Stables, MCAS Camp Pendleton Fuel Farm, and the small arms range west of the runway. An altitude of at least 500' AGL must be maintained over the Fallbrook Naval Weapons Station, other aircraft and personnel on the ground.

5. Airspeeds. Course rules airspeed for helicopters is 120-140 KIAS. Course rules airspeed for MV-22 aircraft in conversion mode is 90-120 KIAS. Course rules airspeed for Fixed-Wing and MV-22 aircraft in Airplane Mode is 180-220 KIAS.

3006. VFR DEPARTURE PROCEDURES (HELICOPTER)1. Runway 21

a. VORTAC. After takeoff, proceed direct to MASS-3 and pass to the left (south) of the MASS-3 complex at 800' MSL or below as depicted in Appendix A. Turn left (south) and proceed to the Oceanside VORTAC. Maintaining at or below 800' MSL, remain to the left (south) of the Stuart Mesa housing area and pass just to the left (south) of the Oceanside VORTAC. Report Oceanside VORTAC clear. Aircraft departing to the north staying within R2503 will remain over the shoreline until past the LCAC facility. Aircraft shall remain at or below 800' MSL until clear of the LCAC facility to the north. Aircraft departing to the north and NOT remaining within R2503 will proceed at least one mile offshore and then continue to their destination. Aircraft departing the shoreline to the south will fly at least one mile offshore and then proceed to their destination.

b. Intersection. After takeoff, turn right for the downwind and fly to Basilone Road. Turn left and fly on the left (west) side of Basilone road to the intersection of Basilone/Roblar Roads. Maintain 800' MSL at Point Intersection and report clear.

WARNING: THE INTERSECTION ENTRY CROSSES PERPENDICULAR TO THE DZ BASILONE DROP PATTERN. WHEN PARAOPS ARE BEING CONDUCTED IN DZ BASILONE, THE TOWER WILL NOT AUTHORIZE A POINT INTERSECTION DEPARTURE.

c. Point Canyon. After takeoff, turn right for the downwind and depart via the downwind (heading 020 magnetic). Remain left (west) of the old Naval Hospital. Remain left (west) of Point Canyon and maintain 800' MSL. Report Point Canyon clear. Remain clear of North Initial (Fallbrook Weapons Station water Tower). If proceeding to DeLuz Canyon, notify Tower and switch to LONGRIFLE entering DeLuz Canyon. If departing east, avoid the town of Fallbrook.

d. Morro Hill Departure. Make left turn direct to Morro Hill, maintain 3000' MSL. No SVFR.

CAUTION: AVOID OVERFLIGHT OF BUILDINGS IN THE 22 AREA.

CAUTION: THE RADAR DOWNWIND IS 3000' MSL EAST OF KNFG. ATC WILL PROVIDE TRAFFIC ADVISORIES TO AIRCRAFT DEPARTING VIA MORROW HILL PRIOR TO DEPARTURE. FALLBROOK AND THE LOCAL VICINITY IS AN EXTREMELY NOISE SENSITIVE AREA. FLIGHT AT UNNECESSARILY HIGH AIRSPEEDS AND/OR LOW ALTITUDES SHOULD BE AVOIDED AT ALL TIMES. MINIMUM VFR ALTITUDE OVER ANY PORTION OF FALLBROOK IS 3000' MSL.

2. Runway 3

a. VORTAC. After takeoff, enter the right downwind at 1000' MSL (for downwind terrain avoidance) and proceed to MASS-3. Pass to the left (south) of the MASS-3 complex as depicted in Appendix A. Turn left (southbound) and proceed to the Oceanside VORTAC. Maintaining at or below 800' MSL, remain to the left (south) of the Stuart Mesa housing area and pass just to the left (south) of the Oceanside VORTAC. Report Oceanside VORTAC clear. Aircraft departing to the north staying within R2503 will remain over the shoreline until past the LCAC facility. Aircraft shall remain at or below 800' MSL until clear of the LCAC facility to the north. Aircraft departing to

the north NOT remaining within R2503 will proceed to at least one mile offshore and then to their destination. Aircraft departing to the south will fly at least one mile offshore and then proceed to their destination.

b. Intersection. After takeoff, maintain runway heading until crossing Basilone Road. Turn left and follow the right (east) side of the road to the intersection of Basilone/Roblar Roads. Maintain 800' MSL at the intersection and report clear.

WARNING: THE INTERSECTION ENTRY CROSSES PERPENDICULAR TO THE DZ BASILONE DROP PATTERN. WHEN PARAOPS ARE BEING CONDUCTED IN DZ BASILONE, THE TOWER WILL NOT AUTHORIZE A POINT INTERSECTION DEPARTURE.

c. North Initial. After takeoff, maintain runway heading and proceed to North Initial at 3000' MSL. Report North Initial clear. Avoid over flight of the town of Fallbrook below 3000' MSL.

d. Point Canyon. After takeoff, proceed to Lake O'Neil and fly right (southeast) of the old Naval Hospital and O'Neil Housing, remain right of (east) Point Canyon and maintain 800' MSL.

e. Morro Hill Departure. Make right turn direct Morro Hill, maintain 3000' MSL. No SVFR.

CAUTION: THE RADAR DOWNWIND IS 3000' MSL EAST OF KNFG. ATC WILL PROVIDE TRAFFIC ADVISORIES TO AIRCRAFT DEPARTING VIA MORROW HILL PRIOR TO DEPARTURE. FALLBROOK AND THE LOCAL VICINITY IS AN EXTREMELY NOISE SENSITIVE AREA. FLIGHT AT UNNECESSARILY HIGH AIRSPEEDS AND/OR LOW ALTITUDES SHOULD BE AVOIDED AT ALL TIMES. MINIMUM VFR ALTITUDE OVER ANY PORTION OF FALLBROOK IS 3000' MSL.

3007. VFR DEPARTURE PROCEDURES (FIXED WING/TILT-ROTOR)

1. Runway 21

a. VORTAC. After take-off, proceed direct to MASS 3 and pass to the left (south) of the MASS-3 complex at 1500' MSL, remain to the left (south) of the Stuart Mesa Housing area and pass to the left (south) of the Oceanside VORTAC. Report the VORTAC clear. Aircraft departing to the north to remain within R2503 will remain over the shoreline until past the LCAC facility. Remain at 1500' MSL until north of the LCAC facility. Aircraft departing to the north NOT remaining within R2503 will proceed at least one mile offshore and then proceed to their destination. Aircraft departing to the south will fly at least one mile offshore and then proceed to their destination.

b. Point Canyon. After take-off, turn right to depart via the right downwind at 1500' MSL. Remain left (west) of the hospital and Point Canyon, report Point Canyon clear to the Tower.

c. Intersection. After take-off, turn right to depart via the right downwind to Basilone Road at 1500' MSL. Turn left and fly on the left (west) side of Basilone Road to the intersection of Basilone/Roblar roads. Report the intersection clear to the Tower.

d. Morro Hill Departure. Make left turn direct to Morro Hill, maintain at or above 3500' MSL. No SVFR.

CAUTION: AVOID OVERFLIGHT OF BUILDINGS IN THE 22 AREA.

CAUTION: THE RADAR DOWNWIND IS 3000' MSL EAST OF KNFG. ATC WILL PROVIDE TRAFFIC ADVISORIES TO AIRCRAFT DEPARTING VIA MORROW HILL PRIOR TO DEPARTURE. FALLBROOK AND THE LOCAL VICINITY IS AN EXTREMELY NOISE SENSITIVE AREA. FLIGHT AT UNNECESSARILY HIGH AIRSPEEDS AND/OR LOW ALTITUDES SHOULD BE AVOIDED AT ALL TIMES. MINIMUM VFR ALTITUDE OVER ANY PORTION OF FALLBROOK IS 3000' MSL.

2. Runway 3

a. Point Canyon. After take-off, proceed to Lake O'Neil and fly right (southeast) of the hospital and O'Neil Housing. Remain right (east) of Point Canyon at 1500' MSL and report clear to the Tower.

b. North Initial. After takeoff, fly runway heading and proceed to the North Initial at or above 3500' MSL. Report the North Initial clear to the Tower. Avoid over flight of the town of Fallbrook below 3000' MSL.

c. Intersection. After takeoff, fly runway heading until Basilone Road. Turn left and follow Basilone Road to the right (east) side of the road to the intersection of Basilone/Roblar Roads at 1500' MSL and report clear to the Tower.

d. VORTAC. After take-off, proceed direct to MASS-3 via a right downwind. Pass left (south) of the MASS-3 complex at 1500' MSL, remain to the left (south) of the Stuart Mesa Housing area and pass to the left (south) of the Oceanside VORTAC. Report the VORTAC clear. Aircraft departing to the north to remain within R2503 will remain over the shoreline until past the LCAC facility. Remain at 1500' MSL until north of the LCAC facility. Aircraft departing to the north NOT remaining within R2503 will proceed at least one mile offshore and then proceed to their destination. Aircraft departing to the south will fly at least one mile offshore and then proceed to their destination.

e. Morro Hill Departure. Make right turn direct Morro Hill, maintain at or above 3500' MSL. No SVFR.

CAUTION: THE RADAR DOWNWIND IS 3000' MSL EAST OF KNFG. ATC WILL PROVIDE TRAFFIC ADVISORIES TO AIRCRAFT DEPARTING VIA MORROW HILL PRIOR TO DEPARTURE. FALLBROOK AND THE LOCAL VICINITY IS AN EXTREMELY NOISE SENSITIVE AREA. FLIGHT AT UNNECESSARILY HIGH AIRSPEEDS AND/OR LOW ALTITUDES SHOULD BE AVOIDED AT ALL TIMES. MINIMUM VFR ALTITUDE OVER ANY PORTION OF FALLBROOK IS 3000' MSL.

3008. VFR ARRIVAL PROCEDURES (HELICOPTER)

1. General. Aircraft inbound to MCAS Camp Pendleton shall monitor ATIS and report receipt of the current information when contacting Tower for landing instructions; for lost communication procedures, see paragraph 3014.

2. Entering Class D airspace. Contact Camp Pendleton Tower prior to entering Class D or Class E airspace. If radio traffic precludes a call prior to entry, orbit and re-attempt before proceeding. Initial contact with Tower shall be established prior to proceeding inbound beyond the designated VFR entry/reporting points described in paragraph 3004.

3. Runway 21

a. LCAC Facility. Aircraft arriving at the LCAC facility from the north will remain at least one mile offshore until one-half mile north of the LCAC

facility as depicted in Appendix E. Pass north of the LCAC facility, maintain 1000' MSL, and request an LCAC entry from the Tower. Aircraft arriving from the south remain at least one mile off the shoreline until abeam the LCAC facility. Pass north of the LCAC facility, maintain 1000' MSL, and request an LCAC entry from the Tower. With Tower communication established, proceed to MASS-3 and pass to the left (north) of MASS-3 for pattern entry. Aircraft may descend once inside of Class D airspace and clear of the Edson Range Impact Area. Aircraft not in communication with Tower remain clear to the northwest of the LCAC facility and Class D airspace until communication is established.

b. Intersection. From the northeast of Basilone/Roblar Roads Intersection, maintain 1000' MSL and request entry via Point Intersection. Remain left (northeast) of Basilone Road and enter a right base for Runway 21.

WARNING: DO NOT PROCEED INBOUND FROM THE INTERSECTION WITHOUT POSITIVE CLEARANCE FROM TOWER. THE INTERSECTION ENTRY CROSSES PERPENDICULAR TO THE DZ BASILONE DROP PATTERN. WHEN PARAOPS ARE BEING CONDUCTED IN DZ BASILONE, TOWER/LONGRIFLE WILL NOT AUTHORIZE ENTRY/EXIT THROUGH BASILONE/ROBLAR ROADS INTERSECTION.

c. Point Canyon. Helicopters operating in the DeLuz Canyon area may request a Point Canyon entry. Remain east of Point Canyon and maintain 1200' MSL. Proceed east of O'Neil Housing perpendicular to the extended center line of Runway 21. Maintain 500' AGL or above to intercept the extended centerline or Runway 21 and report Lake O'Neil inbound. Do not over-fly the old Naval Hospital or adjacent base housing to the northeast.

d. North Initial. Approach the North Initial from the north to avoid over flying the town of Fallbrook. Required altitude at the water Tower is 3000' MSL. Request entry at North Initial (Fallbrook Weapons Station water Tower) for a straight-in to Runway 21. The minimum altitude over the weapons station is 500' AGL.

CAUTION: THE RADAR DOWNWIND IS 3000' MSL EAST OF NFG. FALLBROOK AND VICINITY IS AN EXTREMELY NOISE SENSITIVE AREA. FLIGHT AT UNNECESSARILY HIGH AIRSPEEDS AND/OR LOW ALTITUDES SHALL BE AVOIDED AT ALL TIMES. MINIMUM ALTITUDE OVER ANY PORTION OF FALLBROOK IS 3000' MSL.

4. Runway 3

a. LCAC Facility. Aircraft arriving from the north shall remain at least one mile offshore until one-half mile north of the LCAC facility as depicted in Appendix E. Pass north of the LCAC facility, maintain 1000' MSL and request an LCAC entry from Tower. Aircraft arriving from the south remain at least one mile off the shoreline until abeam the LCAC facility. Pass north of the LCAC facility, maintain 1000' MSL and request an LCAC entry from Tower. With Tower communication established, proceed to MASS-3 and pass to the left (north) for straight-in runway 3. Aircraft may descend once inside of Class D airspace and clear of the Edson Range Impact Area. Aircraft not in communication with Tower remain clear to the northwest of the LCAC facility and class D airspace until communication is established.

b. Intersection. From southwest of Basilone/Roblar Roads Intersection, maintain 1000' MSL and request entry via Point Intersection. Remain right (southwest) of Basilone Road and enter a left downwind for Runway 3.

WARNING: DO NOT PROCEED INBOUND FROM THE INTERSECTION WITHOUT POSITIVE CLEARANCE FROM TOWER. THE INTERSECTION ENTRY CROSSES PERPENDICULAR TO THE DZ BASILONE DROP PATTERN. WHEN PARAOPS ARE BEING CONDUCTED IN DZ BASILONE, TOWER/LONGRIFLE WILL NOT AUTHORIZE ENTRY/EXIT THROUGH BASILONE/ROBLAR ROADS INTERSECTION.

c. Point Canyon. Helicopters operating in the DeLuz Canyon area may request a Point Canyon entry. Aircraft shall fly directly down DeLuz Canyon (heading 200 degrees) at or above 500' AGL. Remain right (west) of Point Canyon at 1200' MSL. Do not over-fly the old Naval Hospital or adjacent base housing to the northeast. Enter a left downwind for Runway 3.

NOTE: NORTH INITIAL IS NOT AN AUTHORIZED ENTRY POINT WHEN RUNWAY 3 IS THE ACTIVE RUNWAY.

5. Entering the Traffic Pattern (Runway 3/21)

a. Enter the pattern at 600' MSL.

b. The helicopter overhead break altitude is 1100' MSL. Break to the northwest, normally at/over the numbers or as approved by the Tower. Low breaks of 500' MSL require Tower approval.

c. Aircraft shall avoid overtaking and passing other aircraft in the traffic pattern.

3009. VFR ARRIVAL PROCEDURES (TILTROTOR)

1. General. To the maximum extent possible, MV-22 Aircraft should fly the break. Aircraft inbound shall monitor ATIS and report receipt of the current information when contacting Tower. For lost communication procedures, see paragraph 3014.

2. Runway 21

a. LCAC Facility. Aircraft arriving from the north remain at least one mile offshore until one-half mile north of the LCAC facility. Pass north of the LCAC facility, maintain 2000' MSL and request LCAC entry from the Tower. Aircraft arriving from the south remain at least one mile offshore until abeam the LCAC facility. Pass north of the LCAC facility, maintain 2000' MSL and request LCAC entry from the Tower. Proceed to MASS-3 and pass to the left (north) of MASS-3 for pattern entry. Aircraft may descend to pattern altitude (1100' MSL) once inside Class D airspace. Aircraft not in communication with the Tower remain clear to the northwest of the LCAC facility and Class D airspace until communication is established.

b. North Initial. Approach the North Initial from the north to avoid over flying the town of Fallbrook. Cross at 3,500' MSL and request North Initial entry from the Tower for a straight in approach or the overhead maneuver. Overhead maneuver will be conducted in accordance with section 3010 paragraph 3 of this Manual. Avoid over flight of the town of Fallbrook below 3000' MSL.

3. Runway 3

a. LCAC. Aircraft arriving from the north remain at least one mile offshore until one-half mile north of the LCAC facility. Pass north of the LCAC facility, maintain 2000' MSL and request LCAC entry from the Tower for either the straight in or overhead approach. Aircraft arriving from the

south remain at least one mile offshore until abeam the LCAC facility. Pass north of the LCAC facility, maintain 2000' MSL and request LCAC entry from the Tower for either the straight in or overhead approach. Overhead maneuver will be conducted in accordance with section 3010, paragraph 3 of this Manual. Proceed to MASS-3 and pass to the left (north) of MASS-3 and then proceed to the runway for requested approach. Aircraft may descend once inside Class D airspace. Aircraft not in communication with the Tower remain clear to the northwest of the LCAC facility and Class D airspace until communication is established.

b. Point Canyon. Aircraft operating in the DeLuz Canyon area may request a Point Canyon entry. Aircraft shall fly directly down DeLuz Canyon at 2000' MSL to enter a left downwind. Remain to the right (west) of Point Canyon and do not over fly the old hospital or adjacent base housing areas. Descend to pattern altitude once established in the left downwind.

3010. VFR ARRIVAL PROCEDURES (FIXED-WING/MV-22 AIRPLANE MODE)

1. General. Pilots of aircraft inbound to MCAS Camp Pendleton shall monitor ATIS prior to calling for approach/landing instructions; for Lost Communications procedures, refer to paragraph 3014.

2. Entering Class D airspace. Jet aircraft shall contact Tower at 10 NM; others report at one of the VFR entry/reporting points. Airspeeds are in accordance with reference (e).

a. North Initial. Fallbrook water Tower, NFG TACAN 032/9.0; cross at 3500' MSL or above airspeed no greater than 250 indicated air speed. Approach North Initial from the north to avoid over-flying the town of Fallbrook.

CAUTION: THE RADAR DOWNWIND IS 2900' MSL EAST OF NFG. FALLBROOK AND VICINITY IS AN EXTREMELY NOISE SENSITIVE AREA. FLIGHT AT UNNECESSARILY HIGH AIRSPEEDS AND/OR LOW ALTITUDES SHOULD BE AVOIDED AT ALL TIMES. MINIMUM VFR ALTITUDE OVER ANY PORTION OF FALLBROOK IS 3000' MSL.

b. South Initial. Oceanside VORTAC, NFG TACAN 210/2.3; cross at 3000' MSL.

WARNING: EXTENSIVE CIVIL TRAFFIC IN THE VICINITY OF THE OCEANSIDE VORTAC.

3. Overhead Breaks. Aircraft will report the North/South Initial for an overhead break. Maintain at least 1000' AGL over the X-Ray Impact Area. Break altitude is 1600' to the northwest and 2000' to the southeast. Southeast break not authorized after sunset.

3011. IFR ARRIVAL PROCEDURES

1. General. Aircraft operating on IFR clearances will follow the published instrument procedures and comply with instructions from the controlling agency. Aircrews operating on IFR clearances in VMC must be alert to VFR traffic in the Class D airspace; the Class D airspace is a high-density traffic area with numerous converging VFR and IFR traffic patterns. Refer to Chapter 4 for instrument procedures.

WARNING: THE VISUAL DESCENT PATH AND IFR APPROACH COURSE FOR RUNWAYS 21 AND 3 DESCEND BETWEEN FLANKING RIDGES INTO A VALLEY IN WHICH THE AIRFIELD IS LOCATED.

2. Visual Approach. A visual approach may be approved by the controlling agency provided the pilot has the airport in sight and VMC prevails. A visual approach is not an instrument approach and therefore has no missed approach segment. If a go-around is necessary, the aircraft will be issued a clearance by the Tower.

3012. HELICOPTER SPECIAL VFR (SVFR) OPERATIONS

NOTE: ONLY ONE AIRCRAFT CALL SIGN AT A TIME CAN OPERATE IN CLASS D AIRSPACE DURING SVFR.

NOTE: SVFR FOR TILT-ROTOR AIRCRAFT IS ONLY AUTHORIZED IF CONDUCTED IN THE 'CONVERSION' MODE AND IN ACCORDANCE WITH PROCEDURES ESTABLISHED IN SECTION 3012 OF THIS MANUAL.

1. General. SVFR operations may be conducted within the MCAS Camp Pendleton Class D airspace (helicopter/tilt-rotor conversion mode only) when the airfield is open. A minimum ceiling of 500' AGL and visibility of at least one statute mile is required for the local pattern and North Initial arrival route. All other SVFR routes require a ceiling at or above 800' AGL. Aircraft must be cleared to enter/depart Class D airspace under SVFR conditions. Except for emergencies, no aircraft will operate in Class D airspace without an SVFR clearance.

2. Procedures. Helicopters and tilt-rotor aircraft operating SVFR may be cleared into the airspace, using the following procedures:

- a. **Pilots must initiate the request for an SVFR clearance.**
- b. Initial contact with the Tower shall be established before entering the Class D airspace. Arriving aircraft not in receipt of a SVFR clearance will remain outside of Class D airspace until clearance is received.
- c. Aircraft shall operate with landing lights on while flying within the Class D airspace to enhance collision avoidance.
- d. IFR departure/arrivals have priority over SVFR aircraft.
- e. SVFR cleared pattern aircraft will be required to land whenever other SVFR or IFR aircraft are inbound to the field until visual separation procedures can be applied.
- f. SVFR formation flights are authorized inside Class D airspace. Landing interval may be taken after the flight is cleared to land and the landing area is in sight.
- g. SVFR arrival and departure routes are depicted in Appendix A.

WARNING: DURING SVFR OPERATIONS, USE EXTREME CAUTION. AVOID THE HIGH-TENSION WIRES WEST OF MASS-3. DO NOT OVER FLY EDSON RANGE OR STUART MESA HOUSING.

(1) Intersection. Arrive/Depart via the Basilone/Roblar Road Intersection. Fly over Basilone Road for pattern entry.

(2) Point Canyon. Arrive/Depart via Point Canyon. For Runway 21: arriving aircraft proceed to the left (northeast) of the old hospital and report Lake O'Neil for a straight-in approach; departing aircraft turning right downwind and fly to the left (southwest) of the hospital and proceed to Point Canyon. For Runway 3: Arriving aircraft proceed to the right

(northwest) of the old hospital and enter a left downwind; departing aircraft proceed to Lake O'Neil and fly right (southeast) of the old hospital proceed to Point Canyon.

(3) North Initial. Arriving aircraft will proceed from North Initial to Lake O'Neil and report Lake O'Neil for pattern entry. Minimum altitude over the Naval Weapons Station is 500' AGL. Arriving aircraft not in receipt of a SVFR clearance will remain outside of Class D airspace and north of the town of Fallbrook until clearance is received. SVFR departure via North Initial will not normally be authorized, however, there are some situations that could allow for this departure.

(4) LCAC. Arriving aircraft will remain one mile offshore until turning inbound for the LCAC facility. Fly to pass to the left (north) of the LCAC facility. Aircraft shall contact Tower prior to Interstate 5 for clearance into Class D airspace. Aircraft not in receipt of a SVFR clearance will remain outside of Class D airspace to the northwest of the LCAC facility until clearance is received. If unable to contact the Tower, hold in VFR conditions northwest of the LCAC facility and contact LONGRIFLE. LONGRIFLE will coordinate with the Tower for a SVFR recovery. With clearance, proceed to MASS-3 staying clear (north) of Stuart Mesa Housing and report MASS-3 for pattern entry. Do not over-fly Edson Range.

(5) VORTAC. Departing aircraft will proceed direct to MASS-3 and pass to the left (south) of the MASS-3 complex as depicted in Appendix A. Turn left (southbound) and proceed to the Oceanside VORTAC. Remain to the left (south) of the Stuart Mesa housing area and pass just to the left (south) of the Oceanside VORTAC. Aircraft departing to the north staying within R2503 will remain over the shoreline until past the LCAC facility. Aircraft departing to the north NOT remaining within R2503 will proceed to at least one mile offshore and then proceed to their destination. Aircraft departing the shoreline to the south will fly at least one mile offshore and then proceed to their destination.

3013. NIGHT VISION DEVICE (NVD) TRAINING. NVD operations at the airfield shall be conducted per the current edition of reference (b) and only when the airfield is VFR. Aircraft exterior lighting shall comply with applicable FAA regulations with the exception that the anti-collision lights need not be lit when the pilot in command determines that, because of operating conditions, it would be in the interest of safety to turn the lights off. During NIGHTEX periods, the airfield and runway lights will be off. Squadrons should practice good light discipline to reduce hangar lights that can pose a hazard to participating aircraft.

3014. EMERGENCY PROCEDURES

1. General. An emergency may be declared by the pilot, aircrew, ATC, ARFF, or officials responsible for operation of the aircraft. At that time the pilot will receive priority handling by ATC. When an emergency is declared, Tower shall immediately activate the Crash Phone to pass the following information as it becomes available. On Station: location, type of aircraft, nature of emergency, fuel state, number of personnel on board, ordnance or hazardous cargo, landing runway, and any other pertinent information. Off Station: location of mishap, type of aircraft and if fire is present. Agency receiving crash report should request reporting person's name and telephone number and request they remain at a designated location and act as a guide if necessary.

2. Lost/Disoriented Aircraft. Pilots who are lost or disoriented should not hesitate to call any military or FAA facility for assistance. VHF direction finder service is available through San Diego FSS. If near the coast, SOCAL TRACON can best identify aircraft and provide assistance.

3. Lost Communications

a. Aircraft experiencing lost communications while VFR will remain VFR, squawk 7600, enter via normal course rules routing, and enter a 2000' MSL delta pattern oriented northwest of the runway in the direction of landing traffic. Aircraft will flash their landing and nav/position lights (night) or rock their wings (day) and adhere to appropriate light gun signals given by Tower.

b. Refer to paragraph 4003.5 for IFR Lost Communications procedures.

4. Reporting Danger to Life or Property. Pilots shall report the following conditions to ATC as soon as possible:

a. Near midair collision (NMAC) with other aircraft/drones or runway incursions.

b. Lasing of aircraft (time and location).

c. Flight maneuvers employed that may endanger life or property.

d. Other unsafe conditions.

e. Non-published drone operations.

5. Low Fuel State. "Minimum fuel" is an advisory term indicating that in the judgment of the pilot the fuel state is such that no undue delay can be accepted enroute to the destination. It is not an emergency, but undue delay may result in an emergency. If at any time the remaining useable fuel supply suggests the need for traffic priority to ensure a safe landing, the pilot shall declare an emergency and report fuel remaining in minutes.

6. Overdue Aircraft

a. Responsibility. An aircraft is considered overdue beyond 30 minutes of the destination Estimated Time of Arrival (ETA) and communications cannot be established with the aircraft. The Flight Clearance Section shall monitor the status of flight plans inbound to MCAS Camp Pendleton. Tenant units shall monitor local flights on their daily flight schedules. Flight Clearance should be notified immediately when an aircraft becomes overdue.

b. Procedures for Overdue Aircraft. Flight following procedures shall be initiated and monitored by Flight Clearance. The following action shall be taken for overdue aircraft:

(1) Initiate a check at the destination airfield for the aircraft in question. The VAL and tenant squadrons will conduct a physical check of their aircraft and report the results to Flight Clearance.

(2) Initiate an alert notice by contacting FSS and request a preliminary communications search be conducted.

(3) For local flights, if the aircraft is not located within one hour after issuance of the alert notice, Airfield Operations shall ensure the Rescue Coordination Center has been notified.

7. Search and Rescue (SAR)

a. The Fleet Area Control and Surveillance Facility (FACSFAC) is the SAR Mission Coordinator for crashes or emergencies involving naval units within the Southern California Fleet Operating Area. FACSFAC is the tasking authority for standby alert helicopters located at Naval Air Station (NAS) North Island. FACSFAC will also assist and relay information to Navy SAR helicopters airborne in the W-291 training area; the Coast Guard Station, San Diego; and the Rescue Coordination Center (RCC), Langley Air Force Base, Virginia. The RCC is the designated SAR Mission Coordinator for off-station land crashes or emergencies.

FACSFAC	DSN 735-1777, commercial (619)545-1777
RCC	DSN 574-8112, commercial (800)851-3051

b. The U.S. Coast Guard Station, San Diego, is responsible for covering as far north as San Mateo, to include MCB Camp Pendleton. The area north of San Mateo Point is the responsibility of the Los Angeles station.

Coast Guard, San Diego (619) 278-7031/32/33 (Response assets located in SD Bay (surface) and KSAN (air))

Coast Guard, Los Angeles (310) 521-3815 (Response assets in San Pedro (surface) and Pt. Mugu (air))

Backup EMERGENCY lines (619)295-3121/3122

3015. SPECIAL USE AREAS

1. Restricted Airspace.

a. MCAS Camp Pendleton Class D/E airspace is located within MCB Camp Pendleton's R2503 A/B restricted airspace. R2503 is controlled by range control, call-sign, LONGRIFLE. Range procedures are discussed in MCB Camp Pendleton Base Order P3500.1, Range and Training Facilities Regulations.

b. The boundaries of R2503A/B/C/D encompass the airspace above MCB and MCAS Camp Pendleton. R2503A overlays the western shoreline of Camp Pendleton and extends from the surface to 2000' MSL. R2503B overlays the eastern portion of Camp Pendleton and extends from the surface to 15,000' MSL. R2503C overlaps R2503B, from 15,000' MSL to flight level 270. R2503D overlaps R2503A, from 2000' MSL to 11,000' MSL.

2. Hazardous Cargo Areas. Hazardous cargo must be handled in accordance with reference (b). Only CALA spots 3 through 12 shall be utilized for the loading or unloading of hazardous cargo aboard aircraft. The explosive limits for the CALA/cargo pad are 30,000 pounds Net Explosive Weight (NEW) of Class/Division (C/D) 1.1; or 28,118 pounds NEW of C/D 1.2.1; or 500,000 pounds NEW C/D 1.2.2 or C/D 1.3; or 30,000 pounds NEW mixed C/D ordnance with C/D 1.1 present. Aircraft Commanders shall coordinate with Airfield Operations before arriving with hazardous cargo. Hazardous spills shall immediately be reported to ARFF at (760)725-4707 and Station HAZMAT at (760)725-8460.

3. Hot Brake Parking Area. The Hot Brake area is clear of the runway on Alpha, Bravo, Delta, Echo 1 and Foxtrot 1 Taxiways.

NOTE: DUE TO INSUFFICIENT TAXIWAY WIDTH, AIRCRAFT LARGER THAN A C-130 ARE NOT AUTHORIZED IN THE CALA.

4. Jettison Areas

a. Fixed-wing aircraft primary and secondary jettison areas have been established in the offshore operating areas.

(1) Primary - 33 degrees 00' North, 117 degrees 48' West; OCN (CH 100X) 219 degree radial/23 DME; JLI (CH 87X) 247 degree radial/61 DME.

(2) Secondary - 33 degrees 00' North, 118 degrees 15' West, OCN (CH 100X) 236 degree radial/44 DME; JLI (CH 87X) 249 degree radial/84 DME.

(3) The use of these areas requires coordination with BEAVER CONTROL, UHF frequency 289.9, for clearance to jettison. Pilots are accountable for ensuring the area below the aircraft is clear prior to jettisoning.

b. The helicopter jettison area has been established in the Zulu impact area of MCB Camp Pendleton. Contact LONGRIFLE for entry into the Zulu impact area.

5. Fuel Jettison Area. Aircraft should jettison fuel offshore, clear of islands and surface vessels, at an altitude of at least 6000' AGL, with consideration for wind borne drift. Avoid populated areas if required to jettison fuel over land.

3016. NOISE ABATEMENT/OVER FLIGHT RESTRICTIONS/QUIET HOURS

1. Noise Abatement/Over Flight Restrictions. The following VFR restrictions apply to noise sensitive areas:

<u>Area</u>	<u>Restriction</u>
Naval Hospital	Do not over-fly
Base Housing Areas	Avoid over-flight below 1500' AGL
11, 13, 16 Areas (Mainside)	Avoid over-flight below 1500' AGL
Base Recreational Areas	Do not over-fly below 500' AGL (e.g., Swimming Pools Beaches and Stables)
Naval Weapons Station Fallbrook	Do not over-fly below 500' AGL
City of San Clemente	Do not over-fly
Town of Fallbrook	Do not over-fly below 3000' MSL
City of Oceanside	Do not over-fly below 3000' MSL

Temecula Valley	Do not over-fly below 3500' MSL
MCAS Camp Pendleton CALA	Do not over-fly below 500' AGL when in Operation
MCAS Camp Pendleton Fuel Farm	Do not over-fly
Personnel, Equipment, Aircraft	Do not over-fly below 500' AGL.

Consistent with weather and mission requirements, use of the over water route is preferred between MCAS Miramar and MCAS Camp Pendleton.

2. Aircraft Disturbance Complaints. Complaints concerning aircraft should be referred to the Air Station Deputy Operations Officer via Flight Clearance (760)725-8016 during working hours. After working hours, reports should be referred to the MCAS Camp Pendleton Station Duty Officer (760)763-1154.

3. Quiet Hours

a. General. MCAS Camp Pendleton Operations Officer will coordinate quiet hours for ceremonies/special events aboard the Air Station and overhead areas within the confines of the Class D/E airspace. Requests for Quiet Hours should be submitted to Airfield Operations via the requesting unit's chain of command no later than 30 days prior to the scheduled event. Requests should include the date and time, location, purpose for the quiet hours, and a name and phone number as a point of contact. Non-tenant unit requests will be evaluated based on operational impact to MAG-39 Operations. MAG-39 will approve or disapprove all tenant unit requests except HMLA-775. Approved Quiet Hours will be published as a NOTAM and included on the Air Station Daily Brief Sheet and recorded on ATIS. Although every effort is made to prevent Quiet Hours' incursions, requesting units are responsible for providing road guards on the Air Station tow way to prevent vehicles from interrupting ceremonies on the flight line. If during the ceremony, the requesting unit requires an extension of the quiet hours, the unit representative will call Flight Clearance at (760)725-8016 for immediate assistance. Additionally, if the ceremony concludes prior to the scheduled expiration of Quiet Hours, the unit will inform Flight Clearance. Securing of quiet hours will be promulgated through a Frost Call from MCAS Camp Pendleton Flight Clearance.

(1) MCAS Camp Pendleton Full Quiet Hours. MCAS Camp Pendleton Full Quiet Hours will normally be implemented for events for O-5/E-8 and above that take place aboard the Air Station not to exceed one hour. No arrivals/departures, pattern operations, or ground turns are permitted. Auxiliary power units will not be engaged, and ground vehicles and Ground Support Equipment (GSE) will not be operated. Adjacent squadrons to the immediate left and right of the ceremony will not have personnel on the flight line. Other squadrons may have personnel on the flight line if their activities do not detract by sight or sound from the intent of quiet hours.

(2) Ranch House Full Quiet Hours. Ranch House Full Quiet Hours will normally be implemented for events for O-7 and above, and memorial ceremonies that take place at the Ranch House not to exceed one hour. No arrivals/departures pattern operations, or ground turns are permitted. Refueling, Ground vehicle and GSE operations are authorized. Auxiliary Power Unit operations are authorized southwest of the control Tower only.

(3) Modified Quiet Hours East. Modified Quiet Hours East will be implemented for events that take place in the 22/23/24 Areas (MCAS/Ranch House) or Main Side (Areas 11-16). The southeast traffic pattern will be closed. Single instrument approaches to a full stop are authorized; multiple approaches are not authorized. When Modified Quiet Hours East is published for MCAS/Ranch House events, aircraft are authorized one departure and one arrival, but local pattern work is not authorized.

(4) Modified Quiet Hours North. Modified Quiet Hours North will be implemented for events that take place in the 25/27 Areas. The Point Intersection and Point Canyon routes will be closed. Extended downwind patterns for the northwest traffic pattern for Runway 21 or extended upwind patterns for Runway 3 are not authorized.

(5) Modified Quiet Hours West. Modified Quiet Hours West will be implemented for events that take place in the 33 Area. The northwest traffic pattern and Point Intersection route will be closed.

(6) Area Quiet Hours. Area Quiet Hours will be implemented for MCB Camp Pendleton events that take place outside of MCAS Camp Pendleton airspace. Over-flight of these areas during the published hours is not authorized.

NOTE: FLIGHTS AT LZS WITHIN THE CLASS D/E AIRSPACE DURING QUIET HOURS ARE AUTHORIZED FOR PREVIOUSLY FRAGGED MISSIONS.

3017. CLOSED TOWER OPERATIONS

1. General. Closed Tower Operations (CTO) are restricted to aircrew that have acknowledged understanding of CTO procedures in writing by signing the MCAS Camp Pendleton CTO request form and emailing the signed form to Flight Clearance (Contact Flight Clearance for CTO request form). IAW reference (b), CTOs may be conducted with the authorization of the Air Station Commanding Officer and the concurrent approval of the aircraft reporting custodian. The Commanding Officer of MCAS Camp Pendleton approves CTO's for aircrew who have received a CTO PPR via Flight Clearance. When a CTO PPR is requested, it is the responsibility of the PPR requestor to obtain permission of the aircraft reporting custodian. If a CTO PPR is issued by Flight Clearance, it is assumed that the aircraft reporting custodian has authorized the request. CTOs are not authorized for routine training flights, but as a mechanism for single arrivals and departures in support of non-routine flights. Flight Clearance can be contacted at mcascpen.fltclr@usmc.mil or (760) 726-8016.

NOTE: THERE ARE NO FUEL, ATC, WEATHER OR FLIGHT PLANNING SERVICES PROVIDED DURING CTOS. ARFF IS MANNED 24/7.

2. Coordination of Closed Tower Operations. Requests for CTOs must be submitted to Flight Clearance at least 24 hours in advance to ensure proper ATC notification.

NOTE: DUE TO COORDINATION REQUIREMENTS WITH SOCIAL TRACON, IFR CTO DEPARTURE/ARRIVAL DELAYS IN EXCESS OF ONE HOUR INVALIDATE THE CTO PPR.

NOTE: DUE TO COORDINATION REQUIREMENTS WITH SOCIAL TRACON, AN IFR CTO NOT COORDINATED THROUGH FLIGHT CLEARANCE DURING NORMAL AIRFIELD HOURS, RISKS DENIAL BY SOCIAL TRACON. IF DENIED WHILE AIRBORNE, PILOTS CAN PROCEED INBOUND "AT OWN RISK" AFTER STATING INTENTIONS WITH CONTROLLING AGENCY.

3. Restrictions to Closed Tower Operations

a. Runway 21/3 is the only authorized landing surface for the conduct of CTOs.

b. SOCAL TRACON will authorize only one IFR call sign to be airborne in MCAS Camp Pendleton Airspace during Closed Tower hours. Upon arrival, aircrew must call "landing assured" before the next aircraft can commence the approach/departure.

c. An ATC clearance to conduct an approach when the airfield is closed does not constitute clearance into R-2503. Aircraft must obtain approval from LONGRIFLE prior to entering the restricted area and shall maintain communication with LONGRIFLE while conducting the approach. MCAS Camp Pendleton's Class D and E airspace is only in effect during hours when the Control Tower is operational. When the Control Tower is closed, aircrew must comply with procedures for operations within R-2503 in accordance with the using agency, Camp Pendleton Range Control, LONGRIFLE.

d. The following are prohibited:

(1) Departures/approaches from/to the taxiways, helicopter spots, or flight line.

(2) Simulated emergencies.

(3) Overhead breaks.

(4) Pattern operations/multiple approaches/routine training on the airfield.

(5) Fixed-Wing Straight in Landings.

(6) Parachute Operations from the airfield.

WARNING: FIXED-WING STRAIGHT IN LANDINGS ARE NOT AUTHORIZED WHEN THE TOWER IS CLOSED. AIRCREW MUST OVERFLY THE RUNWAY TO ENSURE THERE ARE NO VEHICLES, PERSONNEL OR OBSTRUCTIONS ON THE RUNWAY THEN CONDUCT CIRCLING TO LAND AFTER CONFIRMATION OF A HAZARD-FREE LANDING AREA.

e. When the Tower is closed, flights shall contact LONGRIFLE for clearance to enter LZ Phoenix. Aircraft shall monitor LONGRIFLE and make pattern advisory calls in the blind on the LZ Phoenix frequency.

WARNING: THE LZ PHOENIX IS LOCATED OUTSIDE OF R2503 AND BECOMES UNCONTROLLED AIRSPACE WHEN THE AIRFIELD IS CLOSED. NON-TENANT AND CIVILIAN AIRCRAFT MAY TRANSIT THROUGH THIS AREA WITHOUT WARNING.

4. Aircrews desiring to conduct VFR CTOs shall:

a. VFR Departure

(1) Possess a CTO PPR. CTO PPRs should be reserved at least 24 hours prior from Airfield Operations at 725-8016. To request PPRs after field closure, contact MCAS Camp Pendleton Station Duty Officer at (760)763-1154; DSN 361-1154.

NOTE: AFTER HOURS APPROVALS DO NOT MEET SOCAL TRACON COORDINATION REQUIREMENTS FOR IFR CTOS BUT WILL ENSURE ARFF IS NOTIFIED.

(2) Obtain a weather briefing from Regional METOC (858)307-1533.

(3) File a flight plan.

(4) Squadron Operations Duty Officer (ODO) calls ARFF at (760) 725-4707 prior to arrival to pass the estimated departure time to ARFF. Aircrew can also contact ARFF on frequency 340.2. ARFF will be contacted at least 15 minutes prior to departure.

(5) Prior to taxi, contact LONGRIFLE, state route of departure, and request range advisories and clearance to transit the R-2503; monitor LONGRIFLE until clear of the R-2503 airspace.

(6) Taxi, takeoff, and departure point advisory calls will be made on Tower frequency. Depart in accordance with course rules.

NOTE: SVFR DEPARTURES ARE NOT AUTHORIZED DURING CTO.

NOTE: ASOS INFORMATION IS AVAILABLE ON 267.6

(7) Check in with LONGRIFLE after takeoff and notify LONGRIFLE when departing the R-2503 airspace.

(8) Notify San Diego FSS of the time of departure.

b. VFR Arrival

(1) Possess a CTO PPR. CTO PPRs should be reserved at least 24 hours prior from Airfield Operations at 725-8016. To request PPRs after field closure, contact MCAS Camp Pendleton Station Duty Officer at (760)763-1154; DSN 361-1154.

(2) Squadron ODO calls ARFF at (760)725-4707 prior to arrival to pass the estimated landing time to ARFF. Aircrews can also contact ARFF on frequency 340.2. ARFF will be contacted at least 15 minutes prior to landing. Aircrews should receive a weather report from MCAS Miramar Metro. Aircrew shall not conduct a visual arrival if the weather observer reports other than VMC.

NOTE: SVFR ARRIVALS ARE NOT AUTHORIZED DURING CTO.

(3) Contact LONGRIFLE at 310.3 for authorization to enter R-2503 airspace and monitor LONGRIFLE until on deck.

(4) Enter the airfield in accordance with course rules. Entry advisory calls will be made on Tower frequency.

(5) Flight plans can be closed out with San Diego FSS once landing is assured. After landing, call San Diego FSS to ensure the flight plan has been closed.

(6) Squadron ODO's/Aircrews shall notify the ARFF Dispatcher (760)725-4707 or 340.2 when an aircraft cannot meet its PPR ETA plus or minus 15 minutes.

(7) Ground Turns. The ARFF Dispatcher shall be notified prior to conducting ground turns.

WARNING: FIXED-WING STRAIGHT IN LANDINGS ARE NOT AUTHORIZED WHEN THE TOWER IS CLOSED. AIRCRAFT MUST OVERFLY THE RUNWAY TO ENSURE THERE ARE NO VEHICLES, PERSONNEL OR OBSTRUCTIONS ON THE RUNWAY THEN CONDUCT CIRCLING TO LAND AFTER CONFIRMATION OF A HAZARD-FREE LANDING AREA.

5. Aircrews desiring to conduct IFR CTOs shall:

a. IFR Departure

(1) Possess a CTO PPR. CTO PPRs should be reserved at least 24 hours prior from Airfield Operations at (760)725-8016. To request PPRs after field closure, contact MCAS Camp Pendleton Duty Officer at Comm (760)763-1154; DSN 361-1154.

NOTE: AFTER HOURS APPROVALS DO NOT MEET SOCIAL TRACON COORDINATION REQUIREMENTS FOR IFR CTOS BUT WILL ENSURE ARFF IS NOTIFIED.

(2) Obtain a complete route and terminal weather brief prior to departure from Regional METOC (858)307-1533.

(3) File IFR flight plan with the appropriate air operations facility or FSS a minimum of 30 minutes prior to planned departure. This can also be accomplished by calling (800)992-7433, or (800) WX-BRIEF.

(4) Contact SOCIAL TRACON at (800)448-3724 (option #5) prior to taxi to request IFR clearance and release instructions.

NOTE: MCAS CAMP PENDLETON ARRIVAL/DEPARTURE CONTROL SERVICES ARE NOT AVAILABLE WHEN THE AIRFIELD IS CLOSED.

(5) Squadron ODO calls ARFF at (760) 725-4707 prior to arrival to pass the estimated departure time to ARFF. Aircrews can also contact ARFF on frequency 340.2. ARFF will be contacted at least 15 minutes prior to departure.

(6) Prior to taxi, contact LONGRIFLE (UHF 310.3/VHF 123.2), state route of departure, and request range advisories and clearance to transit the R-2503; monitor LONGRIFLE until clear of the R-2503 airspace.

(7) Activate Pilot Controlled Lighting if required by keying aircraft transmitter on UHF 340.2/VHF 128.775 to selected intensity.

(8) Utilize MCAS Camp Pendleton Tower (UHF 340.2/VHF 128.775) when taxiing onto runway 21/3.

(9) Depart as instructed. Contact SOCIAL TRACON on UHF 323.0/VHF 127.3 or as instructed when airborne.

(10) Contact SOCIAL TRACON via phone with reason and intentions if not airborne by "void" time.

b. IFR Arrivals

(1) Possess a CTO PPR. CTO PPRs should be reserved at least 24 hours prior from Airfield Operations at (760)725-8016. To request PPRs after field closure, contact MCAS Camp Pendleton Duty Officer at Comm (760)763-1154; DSN 361-1154.

NOTE: AFTER HOURS APPROVALS DO NOT MEET SOCIAL TRACON COORDINATION REQUIREMENTS FOR IFR CTOS BUT WILL ENSURE ARFF IS NOTIFIED.

(2) Squadron ODO calls ARFF at (760)725-4707 or the Station Duty Officer (760)763-1154 prior to arrival to pass the estimated landing time to ARFF. To shoot the instrument approach, the actual weather must meet the ceiling/visibility minima published on the approach plate.

(3) If the weather is not VMC, request an instrument approach via SOCIAL TRACON on UHF 323.0/VHF 127.3. Once approved for the approach, expect a radio handoff to LONGRIFLE for authorization to enter the R-2503.

NOTE: THE NFG TACAN IS NOT MONITORED FOR FAULTS DURING CTOS. PILOTS ARE ENCOURAGED TO USE THE OCEANSIDE VORTAC INSTEAD.

(4) Activate Pilot Controlled Lighting if required by keying aircraft transmitter on UHF (340.2/VHF 128.775) to selected intensity.

(5) Once landing is assured, advise LONGRIFLE landing assured and request that LONGRIFLE pass to SOCIAL TRACON.

(6) Utilize Tower frequency as UNICOM to broadcast position, landing intentions, and taxi calls.

(7) Call SOCIAL TRACON at (858)537-5916 within five minutes of landing to cancel IFR if unable to via radio. This is required to avoid undue delay to other aircraft.

(8) If unable to land, inform LONGRIFLE and execute the missed approach. Contact SOCIAL TRACON (UHF 323.0/VHF 127.3) for further instructions.

(9) Call SOCIAL TRACON at (858)537-5916 to close out IFR Flight Plan after landing.

6. Closed Tower Ground Turns. The ARFF Dispatcher shall be notified prior to conducting ground turns. A CTO PPR is not required.

3018. SMALL UNMANNED AERIAL SYSTEMS (sUAS) OPERATIONS

1. Definitions

(a) Public UAS Operations: The Department of the Navy (DON) considers an unmanned aircraft system (UAS) operation to be "public" when the UAS is owned, leased, or operated by a DON activity. Certain contracted aircraft operations are considered to be DON Public Aircraft Operations while conducting missions for the DON.

(b) Civil sUAS Operations: An sUAS operation that does not meet the statutory criteria for a public aircraft operation is considered a Civil Operation. Civil Operations must be conducted in accordance with all FAA regulations applicable to the operation

NOTE: CIVIL UAS OPERATIONS ARE PROHIBITED WITHIN MCAS CAMP PENDLETON CONTROLLED AIRSPACE AND ABOVE THE AIRFIELD WITHIN THE PERIMETER

2. Requests to conduct Public UAS operations within airspace controlled by MCAS Camp Pendleton Air Traffic Control (ATC) shall be submitted to MCAS Camp Pendleton ATC and the FAA through; <https://faadronezone-access.faa.gov/> at

least 60 calendar days prior to the requested operation. Requests can be initiated by contacting an MCAS Camp Pendleton ATC UAS Coordinator or by going to the FAA through; <https://www.faa.gov/uas/>. SharePoint information is available at <https://eis.usmc.mil/sites/mcascp/ops/atc/Lists/ATC%20Facility%20Contacts/AllItems.aspx>.

3. Requests above the boundaries of the UAS Facility Map will be approved on a case-by-case basis.

4. DON usage of Commercial-Off-The-Shelf (COTS) UAS must be submitted in accordance with CAMPENO 3710.1. Refer to reference (j) for clarification on the use of UAS operations aboard MCB Camp Pendleton.

5. Approvals for operations do not relieve operators from the responsibility to check the airspace they are operating in and comply with all restrictions that may be present in accordance with 14 CFR § 107.45 and § 107.49 (a) (2), such as restricted and prohibited airspace, TFRs, etc.

6. MCAS Camp Pendleton ATC/Air Station Operations may deny, terminate, restrict, or delay UAS flight operations at any time.

THIS
PAGE
INTENTIONALLY
LEFT
BLANK

CHAPTER 4
INSTRUMENT PROCEDURES

	<u>PARAGRAPH</u>	<u>PAGE</u>
GENERAL	4000	4-2
INSTRUMENT DEPARTURE PROCEDURES	4001	4-2
INSTRUMENT APPROACH PROCEDURES	4002	4-2
RADAR PROCEDURES	4003	4-3
FREQUENCY PLAN	4004	4-4
TRANSPONDER OPERATION	4005	4-4
"GEAR DOWN" PROCEDURES	4006	4-4
MV-22 MAINTENANCE PATTERN	4007	4-4

AIRFIELD OPERATIONS MANUAL

CHAPTER 4

INSTRUMENT PROCEDURES

4000. GENERAL

1. Responsibilities. The MCAS Camp Pendleton ATC Facility provides for the safe, orderly and expeditious flow of aircraft, and controls vehicular traffic operating on the airport movement area.

2. Briefings. ATC will provide briefings on local course rules and ATC Procedures. While the Control Tower and Radar Air Traffic Control Facility (RATCF) are controlled access areas, tours by pilots are encouraged; coordination with the ATC Facility Officer is required.

3. Class D airspace. The MCAS Camp Pendleton Class D airspace is the cylindrical airspace from the surface up to and including 2600' MSL. The perimeter of this airspace is defined as the 010 bearing at 4 NM from the Airport Reference Point, clockwise to the 227 bearing at 4 NM, direct to the 240 bearing at 2.6 NM, clockwise to the 355 bearing at 2.6 NM, direct to the 010 bearing at 4 NM (Appendix F).

4. Class E airspace. The MCAS Camp Pendleton Class E airspace facilitates IFR recoveries and extends from the surface up to and including 2600' MSL. This airspace is an extension of the Class D airspace, from the 010 bearing at 4 NM, direct to the 018 bearing at 6.9 NM, direct to the 041 bearing at 6.9 NM, direct to the 050 bearing at 4 NM (Appendix F).

5. LIMA airspace. The LIMA airspace has been established through a letter of agreement with SoCal TRACON to facilitate IFR recoveries. The airspace is depicted in Appendix F and is under control of the MCAS Camp Pendleton Air Traffic Control Facility when the airfield is open.

6. When CTOs are in effect, all aircraft will contact MCB Camp Pendleton Range Control LONGRIFLE (frequency 310.3 or 123.2) for permission to enter R2503 inbound, or prior to departing the airfield IFR or VFR.

NOTE: MCAS CAMP PENDLETON'S CLASS D AND CLASS E AIRSPACE IS ONLY IN EFFECT WHEN THE CONTROL TOWER IS OPERATIONAL. LIMA AIRSPACE IS ONLY IN EFFECT WHEN THE RATCF IS OPERATIONAL.

4001. INSTRUMENT DEPARTURE PROCEDURES

1. General. IFR clearances will be issued by Clearance Delivery (134.675/271.6). Taxi instructions are issued by Ground Control (360.2), and takeoff/departure instructions and clearance onto the runway will be issued by the Tower (340.2/128.775).

2. Departure Clearance. IFR releases will be relayed to the pilot verbatim.

4002. INSTRUMENT APPROACH PROCEDURES

1. General. Both precision and non-precision instrument approach procedures for MCAS Camp Pendleton are published in the DOD FLIP Low Altitude Instrument Approach Procedures, Volume 4.

2. ATIS. Arriving aircraft shall monitor the ATIS broadcast (285.45) prior to contacting SOCAL TRACON or MCAS Camp Pendleton Arrival/Tower.

3. Radar Arrival Procedures. Aircraft desiring a Ground Controlled Approach (GCA) into MCAS Camp Pendleton should contact Tower when operating VFR within Class D/E airspace or MCAS Camp Pendleton Arrival when operating outside Class D/E airspace.

4003. RADAR PROCEDURES

1. Operational Capabilities. RATCF provides Precision Approach Radar (PAR) and Airport Surveillance Radar (ASR) approaches, instrument approach clearances, monitoring for TACAN/RNAV approaches, and vectoring and clearances for visual approaches.

2. PAR/ASR Procedures. Within three miles of the runway, ATC will issue a landing/low approach clearance. Pilots desiring to execute a stop and go, touch and go, or missed approach shall notify ATC prior to final descent. A pilot shall not descend below the published Decision Altitude or Minimum Descent Altitude unless the runway is in sight. Pilots should continue making radar corrections until over the landing threshold. Course and glide path information provided after the Decision Altitude is advisory only. At the completion of the approach, when the runway environment is in sight, the controller will instruct the pilot to contact the Tower and proceed visually.

3. Missed Approach Procedures. A go around/missed approach, due to misalignment or radical deviation on final approach, is mandatory unless the landing environment is in sight. Pilots shall execute a missed approach when directed by the Tower or GCA Controller.

4. GCA Climb Out Procedures for Runway 21. Unless otherwise amended by ATC, pilots shall expect the following climb out procedures:

a. VFR. Climb via runway heading to 1300' MSL, after the upwind numbers turn left to a heading of 050 and continue climbing to 3000' MSL.

b. IFR. Climb via runway heading to 1300' MSL, after the upwind numbers turn left to a heading of 050 and continue climbing to 3000' MSL.

5. Local Lost Communication Procedures. Pilots conducting Ground Controlled Approach (GCA) recoveries can expect to receive the following lost communication procedures from radar; "If no transmissions are received for one minute in the pattern or five seconds on final approach (15 seconds for an ASR), attempt contact Camp Pendleton Tower on 340.2/128.77 and proceed VFR. If unable (expect to be issued one of the appropriate IFR instructions below):

a. Helicopter; Runway 21. Climb and maintain 4100' MSL, proceed direct to CORRI, and execute the Copter TACAN Runway 21 Approach."

b. Helicopter; Runway 3. Climb and maintain 4900' MSL, proceed direct to CASPO, and execute the TACAN Z, Runway 21 Approach, circle to Runway 3."

c. Fixed Wing/MV-22. Climb and maintain 4900' MSL, proceed direct to CASPO, and execute the TACAN Z, Runway 21 Approach or (if Runway 3 is in use) TACAN Z Runway 21 approach, Circle to Runway 3."

d. Non-TACAN Capable or VOR/DME Aircraft only. Climb and maintain 4200, proceed direct JAPAP, execute VOR/DME or TACAN Y Runway 21 approach (or VOR/DME Runway 21 approach, Circle to Runway 3)."

4004. FREQUENCY PLAN. Commonly used frequencies are listed in Appendix D.

4005. TRANSPONDER OPERATION. Transponders will be off or in standby when taxiing or conducting local pattern operations. Appropriate transponder codes will be utilized during lost communication or emergencies.

4006. GEAR DOWN PROCEDURES. The pilot shall provide a "Gear Down" report when abeam or after lowering the landing gear on a straight-in approach. If this report is not received, ATC shall remind the pilot to "CHECK WHEELS DOWN." In the event of an unsafe gear indication, the pilot shall promptly notify the controlling agency. After landing with known or suspected unsafe gear, the pilot shall remain on the runway until the landing gear is inspected and the pilot-in-command determines the aircraft can be safely taxied/towed clear of the runway. Prior to final descent, the GCA Controller will remind the pilot that their wheels should be down.

4007. MV-22 MAINTENANCE PATTERN. The MV-22 maintenance pattern is available upon request. Aircraft shall contact Camp Pendleton Arrival (236.3), and should expect a block altitude assignment from ATC. Using left turns, aircraft will enter a racetrack pattern parallel to the final approach course. Aircraft will operate under their own navigation while in VMC conditions, and must remain within the lateral and vertical limits of LIMA airspace, area B. In the event of a potential spill out or conflicting traffic, ATC may issue vectors or alternative instructions. Refer to appendix F for LIMA airspace dimensions.

THIS
PAGE
INTENTIONALLY
LEFT
BLANK

AIRFIELD OPERATIONS MANUAL

CHAPTER 5

AIRFIELD OPERATIONS & MAINTENANCE

	<u>PARAGRAPH</u>	<u>PAGE</u>
GENERAL	5000	5-2
ORDNANCE/WEAPONS PROCEDURES	5001	5-2
REFUELING PROCEDURES	5002	5-6
AIRFIELD MAINTENANCE	5003	5-10
RESPONSIBILITY FOR AIRFIELD PAVED AREAS	5004	5-10
DAILY INSPECTIONS	5005	5-10
FOREIGN OBJECT DEBRIS (FOD) INSPECTIONS	5006	5-11
RUNWAY TAXIWAY AND RAMP SWEEPING	5007	5-11
MAINTENANCE OF GRASS AREAS	5008	5-11
FUEL SPILLS	5009	5-11
HALOTRON FLIGHTLINE EXTINGUISHERS	5010	5-12
TOWAY	5011	5-12
AIRCRAFT ACCESS APRON (THE SLASH)	5012	5-12

AIRFIELD OPERATIONS MANUAL

CHAPTER 5

AIRFIELD OPERATIONS & MAINTENANCE

5000. GENERAL. The flight line is a dynamic environment and poses hazards to personnel. Hazards range from loud noise, airborne debris, hazardous chemicals and exposure to explosive ordnance operations. Appropriate personal protective equipment (including hearing protection) must always be worn while on the flight line.

5001. ORDNANCE/WEAPONS PROCEDURES1. General

a. Ordnance Operations including uploading/downloading arming/de-arming of aircraft carrying explosive ordnance or gun ammunition is authorized when the airfield is open or closed. Ordnance operations may only be conducted in the CALA and in accordance with established ordnance and safety guidelines outlined in reference (h). MK-76 and 106 practice bombs, captive carry missiles, chaff/flare dispensers, and crew served guns may be loaded on the flight line. Cartridge activated devices (CADs), and chaff/flare dispensers can be armed at the "hold short" line prior to takeoff.

NOTE: DUE TO TAXIWAY WIDTH, AIRCRAFT LARGER THAN A C-130 ARE NOT AUTHORIZED IN THE COMBAT AIRCRAFT LOADING AREA.

b. Units will schedule the use of the CALA through Flight Clearance via email (Global: mcascpen.fltclr@usmc.mil, telephone or in person (Appendix G). CALA loading points will be scheduled on a first-come, first-served basis. Units must specify if CALA operations include hot loading when requesting spots. For hot loading, MCAS Camp Pendleton Flight Clearance will notify MCAS Camp Pendleton ARFF of the hot tube loading event. Any CALA scheduling conflicts will be resolved by the MAG-39 Operations Officer. CALA logs are available on the SHAREPOINT at: <https://eis.usmc.mil/sites/mcascp/ops/FLTCLR/default.aspx>

c. Aircraft exiting the runway shall contact Ground Control on the Charlie Taxiway for clearance into the arm/de-arm area or the CALA (Appendix H). Aircraft entering the CALA will proceed along the Charlie Taxiways to their designated loading/ downloading spots. While in the CALA or arm/de-arm area, turning/taxiing aircraft and fuel trucks shall monitor the Ground Control Frequency. Aircraft exiting the CALA will request taxi clearance prior to departing a loading/downloading spot. Aircraft Commanders shall specify their destination, e.g., "Camp Pendleton Ground, ATLAS 01, flight of two in the CALA, taxi to the arming area." The departing Aircraft Commander will also ensure that no fuel trucks are present in the fuel truck area, and that appropriate coordination has been made with all Aircraft Commanders in the CALA before exiting.

NOTE: CALLS SHALL BE MADE IN THE BLIND ON TOWER FREQUENCY WHEN THE AIRFIELD IS CLOSED.

d. Due to the proximity of other aircraft in the CALA, a qualified taxi director should direct aircraft into and out of assigned loading/downloading spots. Starting engines is prohibited if the aircraft in the adjacent spot is being fueled.

e. While entering/exiting the CALA, fuel trucks will be under positive control and must receive clearance from Ground Control to transit airfield taxiways. Fuel trucks will enter the CALA via the Charlie Taxiway and proceed along the "Truck Entry/Exit Line" (North of the striped foul line) to the fuel truck area. During refueling operations, the fuel truck will be positioned in front of the aircraft, and at no time will the fuel truck leave the refueling area except to depart the CALA. Fuel trucks exiting the CALA will proceed to the "Truck Entry/Exit Line" and depart the CALA via Charlie Taxiway.

WARNING: COLD REFUELING OPERATIONS WILL NOT BE CONDUCTED WITHIN 300' OF AIRCRAFT CONDUCTING HOT TUBE LOADING. COLD REFUELING WILL CEASE IF ANY AIRCRAFT COMMENCES HOT TUBE LOADING WITHIN THE 300' RADIUS.

f. Squadron ordnance personnel shall not cross the runway or overrun area unless clearance has been received from Tower. Access to the CALA and arm/de-arm area is via Perimeter Road.

WARNING: DUE TO SIMULTANEOUS FUELING AND UPLOADING PROCEDURES OCCURRING ON SEPARATE AIRCRAFT, ALL PERSONNEL SHALL MAINTAIN AN AWARENESS OF THE REQUIRED DISTANCES DURING THESE PHASES.

g. When lightning is observed within a 10-mile radius of the installation, all ordnance handling shall cease; ordnance should be made as safe as practical. All personnel shall seek cover. Aircraft already loaded, not requiring arming procedures, may taxi and launch at the discretion of the Unit Commander and Pilots in Command as modified by other applicable instructions. Aircraft already loaded with ordnance requiring arming shall not be armed during periods when lightning is observed within 10 miles. Aircraft landing during the above conditions requiring de-arming shall remain in the de-arming area until the lightning threat has passed.

2. Combat Aircraft Loading Area.

a. The CALA consists of 12 numbered loading/downloading spots 85 feet apart and the Explosive Cargo Staging Area (ECSA). These are the only authorized areas to be used for loading ammunition and explosives. Priority for hot tube loading operations will be assigned from spots 12-1. At no time, will cold refueling and hot tube loading be conducted simultaneously within 300 feet (approximately 3 CALA spots) per reference (h).

NOTE: EACH CALA SPOT IS APPROVED FOR 257 POUNDS NET EXPLOSIVE WEIGHT (NEW) PER AIRCRAFT. A DISTANCE OF 70 FEET MUST BE MAINTAINED BETWEEN AIRCRAFT, WHEN POSSIBLE. WHEN NOT POSSIBLE, THE NEW OF ADJACENT AIRCRAFT MUST BE COMBINED.

b. Aircraft gun jams/malfunctions must be cleared in the arm/de-arm area.

c. Aircraft will position to the CALA no sooner than four hours prior to launch, unless prior permission has been obtained from Airfield Operations.

d. Aircraft may be towed or taxied to/from the CALA. Ground Control shall be notified prior to the movement of aircraft. Aircraft shall not be towed when loaded with ordnance.

WARNING: AIRCRAFT WILL NOT BE TOWED VIA PERIMETER ROAD

e. During times of heavy CALA usage, if the possibility exists that aircraft will go beyond the end of the scheduled time for launch, contact Airfield Operations for an extension. If an extension is not feasible, the scheduled aircraft must either launch on time or be downloaded and returned to the flight line so that other scheduled aircraft can be moved to the CALA.

f. Unexpended ordnance, which required loading in the CALA, must be downloaded in the CALA.

g. Only essential personnel involved in the loading/ downloading and launch/recovery of aircraft are authorized in the CALA.

h. Aircraft maintenance will be limited to pre-flight/ post-flight inspections, and limited troubleshooting (less than one hour).

i. Movement of aircraft and equipment to/from the CALA is the responsibility of the aircraft custodian.

j. Explosive cargo-carrying aircraft shall have priority in the CALA.

k. Smoking is not permitted within 50' of the CALA or AWSE/GSE. The designated smoking area is on the north side of the perimeter road (Ordnance Road) at the base of the levee or the smoking bench adjacent to gate 1 of the ordnance compound. Safety Observers, Collateral Duty Inspectors, and other supervisory personnel shall ensure that smoking takes place in authorized areas only.

l. Personnel will not be authorized into the CALA without proper personal protective equipment.

m. Ordnance crews shall stage all ordnance with or without trailers on the asphalt surface on the West or North side of the CALA. Only during the actual loading/downloading of aircraft will ordnance be brought onto the concrete surface.

n. Restrictions. Overflight of the fenced Ordnance Facility (located adjacent to the right side of the approach end of Runway 21) below 500' AGL is prohibited. Ordnance uploading /downloading area (cement ramp) adjacent to the Ordnance Facility may be overflown below 500' only when there is no activity present. Ordnance/Red Label Operations must be coordinated in advance with MCAS Camp Pendleton Operations.

o. Ordnance personnel are responsible for ensuring that all ordnance packing items and FOD are removed from the spot at the completion of each evolution.

p. Aircraft commanders must ensure small arms brass is secure and remains within the aircraft as to not create a FOD hazard.

q. At no time shall ammunition and explosives be left unattended on the CALA. Visiting organizations and tenant commands shall ensure that personnel

qualified and certified to handle ammunition and explosives maintain physical custody of ammunition and explosives staged in the CALA. Security of all ammunition and explosives in the CALA shall be the responsibility of the using activity.

3. Aircraft Arm/De-arm Area. Aircraft arming/de-arming will only be accomplished in the arm/de-arm area (spots 13-18).

CAUTION: CREW SWAPS/HOT SEATING IS PROHIBITED IN THE ARM/DE-ARM AREA.

CAUTION: VEHICLES AND PEDESTRIANS ARE PROHIBITED FROM CROSSING IN FRONT OF AIRCRAFT IN THE ARM/DE-ARM AREA. SAFETY OBSERVERS ARE RESPONSIBLE TO KEEP THE AREA IN FRONT OF THE ARM/DE-ARM AREA CLEAR.

a. A maximum of six aircraft are allowed access into the arm/de-arm area at one time. Mixing helicopters and fixed-wing aircraft is authorized.

b. Pilots of aircraft requiring de-arming shall:

(1) Advise Tower on initial contact that the aircraft requires entry into the de-arming area.

(2) Advise Tower of problems that may arise during arming/de-arming, and if a requirement to shut the aircraft down exists.

NOTE: CALLS SHALL BE MADE IN THE BLIND ON TOWER FREQUENCY WHEN THE AIRFIELD IS CLOSED.

c. The primary arm/de-arm (CALA SPOTS 13-18) will be utilized to the maximum extent possible.

4. Hung Ordnance

a. Hung ordnance is any airborne weapons that cannot be fired or dropped because of weapon, rack, or circuit malfunction resulting in an unknown weapon status. Pilots of aircraft arriving with hung ordnance shall:

(1) Advise Tower that the aircraft has hung ordnance and request a straight-in approach to a full stop landing.

NOTE: CALLS SHALL BE MADE IN THE BLIND ON TOWER FREQUENCY WHEN THE AIRFIELD IS CLOSED.

(2) After landing, hold aircraft in the de-arming area until the aircraft is de-armed.

b. Aircraft experiencing lost communication with hung ordnance will be escorted to a full stop landing by a wingman.

c. In the event a single aircraft with hung ordnance must recover after experiencing radio failure, the pilot shall, to the maximum extent possible, avoid flying overpopulated areas, while complying with lost communication procedures, outlined in paragraph 3014.

NOTE: HUNG ORDNANCE SHALL BE CONSIDERED AN EMERGENCY. WHEN THE AIRFIELD IS CLOSED, PILOTS SHALL NOTIFY THE ARFF DISPATCHER ON FREQUENCY 340.2.

WARNING: IN THE EVENT OF A MALFUNCTION (E.G., JAMMED GUN, HUNG LIVE WEAPONS) ON AN AIRCRAFT, THE AIRCRAFT SHOULD BE MOVED TO THE ARM/DE-ARM AREA FOR THE

GUN/WEAPONS SYSTEM TO BE CLEARED OR DOWNLOADED. AN OPERATIONAL PROCEDURE, WHICH INCLUDES FUELING, MAY CONTINUE ON ALL OTHER AIRCRAFT.

5. Coordinating Instructions

a. Aircraft custodians shall notify Flight Clearance as soon as possible of any cancellations of CALA requests.

b. Using units shall:

(1) Assign safety observers familiar with ordnance safety procedures, to halt operations that may jeopardize safety.

(2) Conduct a FOD walk-down of the CALA daily and prior to engine turn-up.

(3) Ensure compliance with designated non-smoking areas.

5002. REFUELING PROCEDURES

1. Hot Refueling

NOTE: ALL TRANSACTIONS WILL BE RECORDED AS AN ELECTRONIC POINT OF SALE (EPOS). FUEL PERSONNEL WILL UTILIZE A DLA ISSUED TABLET TO RECORD TRANSACTIONS. AN OFFICIAL GOVERNMENT ID AND FUEL CREDIT CARD IS REQUIRED TO RECORD EACH REFUEL/DEFUEL OPERATION. A RECEIPT IS AVAILABLE UPON REQUEST.

NOTE: HOT PIT HOURS DO NOT COINCIDE WITH SCHEDULED AIRFIELD HOURS. CONTACT FLIGHT CLEARANCE AT (760) 725-8016 FOR DAILY HOT REFUELING SCHEDULE. AS A GENERAL RULE, HOT PIT HOURS START TWO HOURS AFTER THE AIRFIELD OPENS, AND CLOSE TWO HOURS BEFORE THE AIRFIELD CLOSSES.

a. Eight refueling points are available on four refueling islands. All eight points can be used simultaneously, provided adequate refueling personnel are available. Aircraft which pressure-refuel on left side will be directed to refueling points 1, 3, 5, and 7. Aircraft (except for C-130's) which pressure-refuel on their right side will be directed to points 2, 4, 6, and 8 in accordance with Appendix I-1. C-130's will be directed to points 3 or 5 facing east in accordance with Appendix I-2.

NOTE: THE MCAS CAMP PENDLETON DIRECT REFUELING SYSTEM IS NOT EQUIPPED WITH A DEDICATED C-130 LANE. A GROUND GUIDE FROM AIRCREW IS REQUIRED DUE TO THE ABNORMAL POSITIONING OF THE AIRCRAFT AND PROXIMITY TO REFUELING EQUIPMENT.

WARNING: AVOID DIRECT OVER-FLIGHT OF AIRCRAFT ON ECHO 2 AND FOXTROT 2 TAXIWAYS BELOW 500'. WHEEL EQUIPPED HELICOPTERS AND TILT-ROTOR AIRCRAFT WILL NOT AIR/HOVER TAXI IN THE FUEL PITS.

NOTE: AIRCRAFT THAT REQUIRE A HOT BRAKE CHECK WILL CONDUCT THE CHECK ON TAXIWAY FOXTROT 1 CLEAR OF THE RUNWAY.

b. Aircraft will enter the refueling pits via the Foxtrot 2 Taxiway. Upon crossing the hold short line, pilots will switch to and contact Ground Control.

CAUTION: WHEN A C-130 IS TAKING FUEL ON REFUELING POINT 3, OTHER AIRCRAFT WILL ONLY USE POINTS 1 AND 2. POINTS 4, THRU 8 WILL BE CLOSED. IF A C-130 IS

REFUELING ON POINT 5, OTHER AIRCRAFT WILL REFUEL ON POINTS 1 THRU 4. POINTS 6 THRU 8 WILL BE CLOSED.

c. Aircraft will taxi to the marshalling line (Appendix I-1) and hold until a refueling point identified by Fuels personnel. However, as depicted in Appendix I-2, C-130's will hold at the marshalling line and an aircrew member will debark and guide the aircraft into refueling position designated by the Fuels personnel.

NOTE: TAXI DIRECTORS ARE NOT REQUIRED IN THE HOT REFUELING PITS (EXCEPT FOR C-130's). FUEL PERSONNEL WILL NOT ACT AS TAXI DIRECTORS FOR AIRCRAFT.

d. Crew Chiefs/Aerial Observers (except C-130's) can exit the aircraft at the lead in line to the refueling point and act as taxi director of the aircraft into the point. C-130 Crew Chiefs can exit the aircraft at the marshalling line to taxi aircraft to the designated refueling point. When refueling operations are complete, aircraft shall depart the fuel pits via the Echo 2 Taxiway.

WARNING: AIRCRAFT THAT REQUIRE TO REPOSITION IN THE HOT REFUELING PITS MUST EXIT THE HOT PITS VIA ECHO 2 AND RE-ENTER VIA FOXTROT 2 UNLESS OTHERWISE INSTRUCTED BY FUEL PERSONNEL. NEITHER AIR NOR GROUND BACK TAXIING IS AUTHORIZED IN THE HOT REFUELING PITS AND IS CONSIDERED AN UNSAFE MANEUVER.

WARNING: AT NO TIME WILL AN AIRCRAFT MAKE A TURN TOWARDS FOXTROT 2 WHEN EXITING A REFUELING POINT. THIS IS DUE TO THE CLOSE PROXIMITY OF AIRCRAFT ENTERING THE HOT PITS FROM THE FOXTROT 2 ENTRY POINT.

e. Aircraft shall disembark passengers prior to refueling operations. Passengers will remain a minimum of 50' from the aircraft while refueling operations are in progress.

CAUTION: STARTING OR STOPPING ANY ENGINE, REGARDLESS OF ITS CONFIGURATION, WITHIN 50 FEET OF A REFUELING OPERATION IS PROHIBITED. THE STARTING OR STOPPING OF AN ENGINE WITHIN 50 FEET OF A REFUELING OPERATION IS SUFFICIENT CAUSE FOR THE OPERATOR TO IMMEDIATELY SHUT DOWN REFUELING OPERATIONS WITHIN THAT SAME 50 FEET.

f. Nozzle Operators. In accordance with reference (a), tenant squadron personnel or plane captain/aircrew fully qualified for aircraft refueling operations duties related to the specific type/model aircraft being refueled shall act as nozzle operators during all refueling operations. Additionally, tenant squadron personnel or plane captain/aircrew are responsible for checking aircraft fueling adapter serviceability, pre-check system operation, fuel tank vents and fuel cap security.

NOTE: FUELING WILL BE DISCONTINUED BY THE REFUELING SUPERVISOR IF THE NOZZLE OPERATOR LEAVES THE FUEL NOZZLE UNATTENDED. IN ACCORDANCE WITH REFERENCE (A) 12.5.1.1 NOZZLE OPERATORS DUTIES INCLUDE THE PERFORMANCE OF NECESSARY AIRCRAFT REFUELING CHECKS SUCH AS EXERCISING OF THE SHUTOFF VALVES PRECHECK SYSTEM AND VENT AND REFUELING PANEL MONITORING. THE NOZZLE OPERATOR SHALL REMAIN AT THE NOZZLE THROUGHOUT THE REFUELING AND LEAVE ONLY TO CONDUCT NECESSARY VENT CHECKS.

g. When refueling operations are complete, aircraft shall depart the fuel pits via the Echo 2 Taxiway.

h. All refueling activities will cease when MCAS Camp Pendleton is in Thunderstorm Condition I and will resume only upon cancellation of Thunderstorm Condition I.

NOTE: URINATING IN THE HOT PITS IS STRICTLY PROHIBITED. AIRCREW CAN USE THE FACILITIES LOCATED IN THE FUEL CREW SHACK.

i. Hot Refueling with Countermeasures

(1) The following procedures apply to USMC aircraft only and are not authorized for other service aircraft.

WARNING: IN ACCORDANCE WITH REFERENCE (A), HOT REFUELING OF EXPLOSIVE LOADED COMBAT AIRCRAFT IS PROHIBITED. DUMMY ORDNANCE, PRACTICE ORDNANCE CONTAINING ONLY FLASH OR IMPACT SIGNAL CARTRIDGE, TRAINING MISSILES WITHOUT LIVE WARHEADS AND MOTORS, INTERNALLY CARRIED PYROTECHNICS AND SIGNAL, UNDERWATER SOUND CARTRIDGES, AIRCRAFT-PECULIAR CARTRIDGE ACTUATED DEVICES, AND DE-ARMED INTERNALLY MOUNTED GUNS LOADED WITH TARGET PRACTICE AMMUNITION ARE EXCLUDED FROM THIS REQUIREMENT; HOWEVER, THIS TYPE OF ORDNANCE SHALL BE SAFE PRIOR TO INITIATING REFUELING. HOT REFUELING OF AIRCRAFT WITH HUNG ORDNANCE OF ANY TYPE IS PROHIBITED. EXPLOSIVE LOADED COMBAT AIRCRAFT ARE NOT PERMITTED IN THE HOT REFUELING PITS.

WARNING: IN ACCORDANCE WITH REFERENCE (A), USMC UC-35 AIRCRAFT ARE NOT AUTHORIZED FOR HOT REFUELING AT MCAS CAMP PENDLETON WITH DECOY FLARES DUE TO INSUFFICIENT SAFETY FEATURES.

WARNING: IN ACCORDANCE WITH REFERENCE (A), AIRCRAFT DE-ARMING AND RE-ARMING SHALL BE CARRIED OUT IN DESIGNATED AREAS PRIOR TO ENTRY AND AFTER DEPARTURE FROM THE REFUELING PITS.

WARNING: IN ACCORDANCE WITH REFERENCE (A), MJU-8/B, MJU-8A/B, MK-46, M206, M211, M212, MJU-46/B, AND MJU-50/B DECOY FLARES ARE NOT AUTHORIZED FOR HOT REFUELING OPERATIONS.

(2) First response firefighting capability at individual hot pit fueling points shall consist of a 30-pound PKP fire extinguisher with an additional 150-pound Halon fire extinguisher for every two fueling points when hot refueling USMC aircraft with loaded decoy flares.

(3) AH-1/UH-1 specific procedures:

a. Aircrew shall utilize the arm/de-arm area to de-arm their dispensers prior to requesting clearance to the hot refueling pits. The dispensers will be de-armed by a qualified ordnance team; however, the aircraft commander is ultimately responsible for ensuring all procedures are completed.

CAUTION: AT NO TIME SHALL AN H-1 AIRCREW REQUEST CLEARANCE TO OR ENTER THE HOT PITS WITH COUNTERMEASURES ON THE AIRCRAFT PRIOR TO RENDERING THEIR DISPENSERS SAFE IN THE ARM/DE-ARM AREA.

b. Prior to the aircraft being grounded and the fuel hose being connected to the aircraft, the crewmember who will be refueling the aircraft (UH-1) or one of the pilots (AH-1) shall relay to the senior Fuels Marine present that the countermeasures on board are safe. This shall be accomplished by presenting the Fuel Marine with thumbs up signal. The Fuel Marine shall return the signal to indicate that he or she understands the aircraft to be safe for refueling. The aircraft Commander is responsible for

ensuring that the Fuel Marine understands and has acknowledged that the aircraft is safe for refueling.

c. Upon completion of refueling in the hot pits, H-1 aircraft shall return to the arm/de-arm area to re-arm their dispensers, if required, for follow-on missions.

d. MV-22 specific procedures:

(1) MV-22 aircrew shall ensure that the countermeasure system is rendered safe in accordance with the landing checklist prior to departing the active runway for the hot pits.

(2) Prior to the aircraft being grounded and the fuel hose being connected to the aircraft, the crew member who will be fueling the aircraft shall relay to the senior Fuel Marine present at the refueling point that the countermeasures on board are safe. This shall be accomplished by presenting the Fuel Marine with thumbs up signal. The Fuel Marine shall return the signal to indicate that he or she understands the aircraft is safe for refueling. The aircraft commander is responsible for ensuring that the Fuel Marine understands and has acknowledged that the aircraft is safe for refueling.

(3) MV-22 aircrews shall not arm the countermeasure system prior to crossing the hold short line on Echo 2 taxiway.

2. Cold Refueling

a. The Alongside Aircraft Refueling Contractor furnishes, manages, operates, and maintains mobile fuel servicing equipment required to provide jet fuel services and support to all tenant and transient aircraft at Marine Corps Air Station (MCAS) Camp Pendleton. The Contractor is responsible for truck fill and product return to bulk operations. The Contractor performs tasks which include Issue and Defuel, Dispatch, Quality Surveillance, and all operations and maintenance of Contractor equipment. The Contractor ensures compliance with all applicable federal, state and local laws and regulations.

b. Typical Hours of Operations are Mon and Fri: 0600 - 1700 / Tue - Thu: 0600 - 2300. Contractors are contracted to support fuel request 24/7 365 days a year. Any hours outside of typical hours noted above shall be requested through MCAS Operations office via MAG 39. The call center number is (760) 725-3430. Personnel are advised not to call prior to start hours as employees are preparing equipment for service and call center is not manned until start hours. Contractors have established an after-hours notification procedure if services are required. Requests shall be made through MCAS Operations office via MAG 39.

3. Jet fuel (JP5) is used in lieu of diesel as required to tenant squadron GSE at a designated location and time. Unscheduled requests for ground fuel deliveries, for which there is no specific response time, received by the fuel dispatch center shall be accomplished within the time limits mutually agreed upon by Air Operations, the requesting activity, and dispatcher. The Contractor is not required to have the capability to perform defueling operations for removal of ground fuel from GSE.

4. All refuel and defuel operations are performed in accordance with the Refueling NAVAIR 00-80T-109. Personnel performing refuel and or defuel operations shall become familiar with the noted Refueling NAVAIR and are

reminded ground crews shall assist with deploying and retrieving of equipment. Request will be fulfilled and supported IN THE ORDER that they are received. Support equipment and personnel are limited and personnel requesting services are requested to be mindful of limitations. Priority refuels and defuels shall be coordinated through MCAS Operations. Emergencies such as leaking aircraft, needing immediate defueling shall be coordinated directly with the Dispatcher.

5. All transactions will be recorded as an EPOS. Fuel personnel will utilize a DLA issued tablet to record transactions. Personnel are reminded a form of government ID and Fuel Credit Card is required to record each refuel / defuel operation. A receipt is available upon request.

5003. AIRFIELD MAINTENANCE

1. Airfield maintenance and repairs are performed by the Public Works Department under the staff cognizance of the MCAS Camp Pendleton Public Works Officer. Forward discrepancies to MCAS Camp Pendleton Operations for correction.

2. Due to the sensitivity associated with infrared and heat sensors tied into hangar fire-suppression systems, any activity that could inadvertently set off the system is strictly prohibited. Such activities include APU or engine operations inside the hangar, open flames, etc. Units requesting to conduct activities that may potentially trigger the fire-suppression system require approval from Marine Corps Base Camp Pendleton Fire Department.

NOTE: FIRE-SUPPRESSION SYSTEMS CONTAIN AQUEOUS FILM FORMING FOAM (AFFF) A KNOWN HAZARDOUS SUBSTANCE. ALL HANGAR FIRE-SUPPRESSION SYSTEMS ARE CURRENTLY TAGGED OUT UNTIL ALL AFFF IS REMOVED. REMOVAL IS SCHEDULED FOR AUGUST 2025.

3. Hangar doors shall be closed on weekends and other periods of inactivity to protect against inclement weather, and as an additional barrier to contain any release of hangar AFFF.

5004. RESPONSIBILITY FOR AIRFIELD PAVED AREAS. The Air Station Operations Officer is responsible for the condition of aircraft movement areas and parking ramps.

NOTE: URINATING ON AIRFIELD SURFACE AREAS IS PROHIBITED.

5005. DAILY INSPECTIONS

1. The runway and taxiways shall be inspected twice daily by MCAS Camp Pendleton Flight Clearance. The inspections are intended to detect FOD in aircraft operating areas, check pavement condition, and the status of runway and taxiway lighting.

2. Before shifting the duty runway, Flight Clearance shall conduct a FOD inspection of critical areas, such as the approach end of the runway and hold areas.

3. The runway shall be inspected for FOD prior to the commencement of operations following an emergency. Any airfield damage shall immediately be reported to the Air Station Operations Officer.

4. The Air Traffic Control Maintenance Division shall perform daily inspections of navigational aids and communication equipment. Findings that

adversely impact airfield operations shall be reported to the Air Station Operations Officer.

5. Additional inspections shall be conducted whenever directed by the Air Station Operations Officer.

5006. FOREIGN OBJECT DEBRIS INSPECTIONS. Prevention of FOD is an essential, on-going program and is the responsibility of all personnel associated with flight operations. Conditions requiring corrective action beyond the capability of tenant units, including adverse conditions of aircraft movement areas and parking ramps, shall be reported to Airfield Operations.

5007. RUNWAY, TAXIWAY, AND RAMP SWEEPING. Runway, taxiway, and ramp areas are routinely inspected for FOD hazards and swept by Flight Clearance Personnel as required.

5008. MAINTENANCE OF GRASS AREAS. The Air Station Operations Officer is responsible for the condition of the Right/Left and North Grass areas. Hazards or deficiencies to flight operations in these areas shall be reported to the Air Station Operations Officer.

5009. FUEL SPILLS

1. Fuel spills over five gallons will immediately be reported to ARFF at (760)725-4707 and Air Station HAZMAT at (760)725-8460.

2. Hot Refueling Pits. In the event of a fuel spill, ARFF will immediately be notified by both aircrew and refueling personnel. The aircrew will immediately shutdown the aircraft's engine(s). The aircraft will then be towed out of the fuel pit after shutdown. ARFF will standby and provide fire protection while the responsible squadron provides personnel for clean-up of the fuel spill in accordance with MCAS Camp Pendleton Environmental procedures.

3. Other Fuel Spill Situations. If a fuel spill occurs on the parking ramps or in the hangars, ARFF will be notified immediately by the most expeditious means. Fuel will not be washed down unless there is an immediate threat to life or aircraft. ARFF will take appropriate measures to contain the fuel spill; however, the responsible squadron is responsible for the clean-up.

a. It is the responsibility of the unit causing the spill to comply with clean-up procedures. Fuel is to be picked up by use of absorbents and or disposed of via the MCAS Camp Pendleton Hazardous Waste Department, Environmental Office. The ARFF incident Commander may determine that a spill is large enough that a vacuum truck or defueler will be necessary to remove most of the fuel. If the fuel spill occurred because of a refueling equipment malfunction, refueling personnel are responsible for the clean-up. Additionally, the following actions shall be completed.

(1) Immediately notify ARFF dispatch (760)725-3877/4707.

(2) Immediately notify Flight Clearance (760)725-8016.

(3) Maintain adequate materials on hand for fuel spill containment and clean-up.

4. Submit telephonic incident report to MCAS Camp Pendleton Environmental Office, (760)725-8460.

5010. HALOTRON FLIGHTLINE EXTINGUISHERS

1. In order to mitigate an incident/accident escalating into a more dangerous situation and to maintain compliance with 00-80R-14 NATOPS, the Aircraft Rescue and Firefighting (ARFF) section will provide the following:

a. ARFF will conduct monthly classes for all personnel engaged in duties involving aircraft operations (maintenance, servicing, and refueling). These classes will include proper care and operation of the 150 lbs. Halotron extinguishers, as well as standard operating procedures for the service, maintenance and issuance of the extinguishers. To schedule classes, squadrons should call 725-4707. These classes will include the below listed topics:

- (1) Aviation fuel fires
- (2) Accessory section fires
- (3) Fuselage fires
- (4) Brake and wheel fires
- (5) Engine and tailpipe fires
- (6) Electronic equipment fires

b. ARFF Materiel section will issue the 150 pounds flight line extinguishers to each squadron depending on their make-up of aircraft and according to requirements outlined in NAVAIR 00-80R-14. They will be recalled periodically to perform required maintenance.

2. Squadrons are required to report any discharge of Halotron to the ARFF dispatcher at (760)725-4707 immediately.

3. Squadrons must maintain accountability of their assigned, serialized extinguishers. It is imperative that the extinguishers are not stored in any hangar or building, remain vertical on the flight line, and anti-pilferage seals are intact.

5011. TOWAY. The airfield TOWAY is a designated road that runs the length of the apron directly in front of the maintenance hangars. This Toway should be used to the maximum extent possible when towing aircraft to and from squadron hangar areas. Due to apron loading, the Toway does not meet NAVAIR offset requirements from the first line of aircraft parked on the apron. NAVAIR has granted a permanent waiver for the offset requirement based on a coordinated agreement between MCAS Camp Pendleton and Marine Aircraft Group 39. Tow-Team vigilance must be maintained during Toway use to ensure safety of personnel and aircraft. Towing of MV-22 aircraft along the Toway West of the control tower should be done using extreme caution due to the size of the aircraft and limited offset space provided by the current apron-parking plan. Tow crews of MV-22's should consider towing aircraft via the Papa Taxiway utilizing airfield radios for ground control coordination.

5012. AIRCRAFT ACCESS APRON (THE SLASH). The Aircraft Access Apron, commonly referred to as the "slash" consists of the first 50' of pavement outside of the hangar doors prior to the Toway. The Aircraft Access Apron is not intended, nor site-approved for parking of aircraft. Due to high apron loading all squadrons utilize this area for parking and maintenance of aircraft. Squadron Commanders accept risk when parking aircraft in the Aircraft Access Apron as high-profile vehicles (box trucks, Fuel trucks, forklifts, etc.) transiting on the Toway may strike aircraft components that overhang the Toway. Squadron Commanders must ensure that no part of the parked aircraft (blades) overhang the Toway and those squadron Maintenance personnel are aware of the risks.

THIS
PAGE
INTENTIONALLY
LEFT
BLANK

AIRFIELD OPERATIONS MANUAL

CHAPTER 6

TRANSIENT SERVICES

	<u>PARAGRAPH</u>	<u>PAGE</u>
GENERAL	6000	6-2
ACCOMMODATIONS	6001	6-3
TRANSPORTATION	6002	6-3
AIR TERMINAL SERVICES	6003	6-4
VIP PROCEDURES	6004	6-4
CLEARANCE OF PASSENGERS	6005	6-4
CIVILIAN AIRCRAFT	6006	6-4
FOREIGN AIRCRAFT	6007	6-5
TEMPORARY STORAGE OF REGISTERED MATERIAL AND WEAPONS	6008	6-5
PER DIEM PROCEDURES/ENDORSEMENT OF ORDERS	6009	6-5

AIRFIELD OPERATIONS MANUAL

CHAPTER 6

TRANSIENT SERVICES

6000. GENERAL. The Air Station Operations Officer ensures visiting aircrews receive professional service during their visit to MCAS Camp Pendleton. Transient personnel may obtain assistance from Flight Clearance located on the first deck of the Operations building (building 2399). Flight Clearance may be reached at (760)725- 8016 or DSN 365-8016. Due to extremely limited ramp space and no available excess hangar space, non-tenant units desiring to conduct detachment operations must be sponsored by the tenant aircraft group. Marine Aircraft Group 39 (MAG-39) Operations may be reached at (760)725-4025 or Marine Aircraft Group 41 (MAG-41) Det A Operations at (760)763-1322 for information. Extended, remain-overnight, single aircraft operations are exempt from this requirement if no facilities, logistical support nor special services are required. Requests to conduct such operations should be addressed with the MCAS Camp Pendleton Deputy Operations Officer at (760) 763-5275 DSN 361- 5275.

1. Course Rules Brief. Non-tenant units operating at MCAS Camp Pendleton for an extended period shall receive a course rules brief from the Air Traffic Control section prior to commencing operations from the airfield. Air Traffic Control may be reached at (760)725-0368 or DSN 365- 0368.

2. Transient Parking. Transient parking at MCAS Camp Pendleton is limited. Transient aircraft will be directed to park by Ground Control and Flight Clearance personnel using the "Follow Me" vehicle. Flight Clearance Personnel are not qualified taxi directors and will not provide taxi guidance. Refer to FLIP AP/1, the IFR En Route Supplement, and the Low Altitude Terminal Procedures, Volume 4, for airfield capabilities and procedures.

3. Services. Services for transient aircraft are limited. Prior coordination with Airfield Operations is required. Transient aircraft, except for those hosted by a tenant squadron or large cargo aircraft, can expect to be parked on the VAL. Laboratory Service is not available. There are no crew vehicles, nor Material Handling Equipment (MHE) available. Requests for transportation and MHE must be requested through the supported unit.

a. Aircraft maintenance services and hangar space may be available upon request through MAG-39 Operations at (760)725-4025.

b. Transient crews are responsible for servicing their aircraft.

c. Pilots of visiting aircraft are responsible for the security of equipment left aboard their aircraft.

d. Hot refueling service is available (refer to hot refueling procedures in Chapter 3) and does not require a Prior Permission Request (PPR). Gravity (cold) refueling is available on a first-come, first-served basis (except VIP support aircraft) and requires a PPR. Expect delays during peak operating hours. Only JP-5 is available. Consult the Enroute Supplement and NOTAMS for hours of availability. Crewmembers will be responsible for

refueling their aircraft. Defueling services are only available for JP-5 fuel.

e. Weather and Flight Planning services are available in Building 2399 at (760)725-8374 or via Regional METOC at (858)307-1533.

4. Prior Permission Request. A PPR number must be requested and approved at least 24 hours prior to arriving at MCAS Camp Pendleton. Aircraft that are inbound for hot refueling do not require a PPR. All tenant and non-tenant aircrews requesting parking on the VAL require a PPR (including FRAGGED VIP lifts). PPRs may be obtained during normal working hours from Flight Clearance. When the airfield is closed, PPRs can be obtained through the MCAS Camp Pendleton SDO at (760)763-1154.

6001. ACCOMMODATIONS

1. Billeting. MCAS Camp Pendleton has no transient billeting. Billeting arrangements must be coordinated through the Marine Corps Base Billeting Office.

2. Messing Facilities

a. Dining facilities are located within walking distance, adjacent to the Air Station, in the 22 and 24 Areas. Current operating hours may be obtained from Flight Clearance.

b. A commercial restaurant is located directly across the street from the Air Station.

c. Flight suits are authorized aboard all MCAS Camp Pendleton and MCB Camp Pendleton facilities.

3. Flight Rations. Rations can be obtained by contacting the 24 Area Mess Hall, (760)725-8460/DSN 365-1943, 24 hours in advance.

4. ATM. There is an ATM located in the MAG-39 HQ parking lot.

6002. TRANSPORTATION

1. General. MCAS Camp Pendleton has no assigned aircrew vehicle. MCAS Camp Pendleton and MCB Camp Pendleton transportation assets are limited. Transportation arrangements must be made prior to arrival at MCAS Camp Pendleton. Neither MCAS Camp Pendleton nor MCB Camp Pendleton provides a base taxi service.

2. Commercial

a. Bus service is available aboard MCB Camp Pendleton and connects with the surrounding communities. Rental vehicles can be obtained through the Base Marine Corps Exchange. MCAS Camp Pendleton does not issue government vehicles to transient aircrews.

b. Taxis are not authorized aboard MCAS Camp Pendleton but can be met at the Air Station main gate.

3. Flight Crews. Transportation from MCAS Camp Pendleton to quarters is the responsibility of the aircrew.

6003. AIR TERMINAL SERVICES

1. General. MCAS Camp Pendleton is not designated as an air terminal. However, various services associated with an air terminal are provided on a limited basis. Services are provided by the Flight Clearance Section located on the first deck of the Operations building (building 2399).
2. Parking. C-130 and smaller aircraft can expect to park on the VAL. Larger aircraft can expect to park on the North Ramp. Taxi directors will not be provided.
3. Air Freight Services. Air freight services are not available. Units requiring the use of the airfield for troop and cargo movement must contact Airfield Operations for coordination at least 72 hours prior to movement. All air freight services, and equipment must be provided by the requesting unit.
4. Agriculture/Customs. Agriculture and customs services are available upon request with 24 hours notification. It is the responsibility of the aircrew to ensure customs has been requested if required.

6004. VIP PROCEDURES

1. General. In accordance with the FLIP General Planning Guide, a VIP is defined as a code 7 or above. All units, including tenant squadrons, must contact Flight Clearance when arriving or departing the VAL with VIPs to ensure the VIP is accorded appropriate honors/courtesies. VIP PPRs are requested at least 24 hours in advance (includes tenant squadrons).
2. Arrival/Departure. Upon notification from Tower, the Flight Clearance section shall initiate arrival procedures for VIP personnel. VIP aircraft will be directed to the VAL parking and assigned a parking spot based on aircraft size and priority.
3. VIPs. VIPs will be extended full services and courtesies. Full honors, per U.S. Naval Regulations, are required for a formal visit, unless otherwise directed by the visiting officer. Hosting units shall advise Airfield Operations of VIP itineraries. A VIP lounge is available adjacent to the passenger lounge area of the Operations building (building 2399).

6005. CLEARANCE OF PASSENGERS

1. General. Personnel departing MCAS Camp Pendleton on a flight must manifest in Flight Clearance no later than 30 minutes prior to boarding the aircraft. The pilot-in-command shall ensure a list of passengers is filed with Flight Clearance. All passengers require appropriate identification.
2. Appearance/Conduct. Military personnel boarding military flights are expected to be in appropriate uniform and conform to service regulations. Retired and civilian personnel must travel in appropriate civilian attire. Use of tobacco products inside the passenger terminal lounge is prohibited.

6006. CIVILIAN AIRCRAFT. Only operators of civilian aircraft who possess a valid Aviation Facility License per 32CFR766, who have official business, and who have been approved by the MCAS Camp Pendleton Commanding Officer may utilize MCAS Camp Pendleton. Additionally, a PPR must be issued by Flight Clearance. Civilian aircraft that land at MCAS Camp Pendleton who fail to comply with these requirements will be handled as potential intruders by the

Military Police. In the event of an emergency landing, a Hold Harmless Agreement and an incident report pertaining to the emergency must be completed prior to departure.

6007. FOREIGN AIRCRAFT. Foreign Aircraft will be required to have a current Naval Aircraft Landing Number (NALAN) issued by the Chief of Naval Operations. Fuel for foreign aircraft must be requested at least two weeks in advance.

6008. TEMPORARY STORAGE OF REGISTERED MATERIAL AND WEAPONS. MCAS Camp Pendleton cannot store registered publications, classified material, or weapons. Civilian aircraft cannot be refueled or afforded other than basic service. Food service, Laboratory service and ice is not available.

6009. PER DIEM PROCEDURES/ENDORSEMENT OF ORDERS. Personnel requiring endorsement of their orders should contact the Base Billeting Office (Building 1341). Further assistance can be provided by the MCAS Camp Pendleton Headquarter & Headquarters Squadron Administrative Section during normal working hours.

AIRFIELD OPERATIONS MANUAL
CHAPTER 7
EMERGENCY RESPONSE PROCEDURES

	<u>PARAGRAPH</u>	<u>PAGE</u>
GENERAL	7000	7-2
AIRCRAFT RESCUE AND FIREFIGHTING (ARFF)	7001	7-2
PROVOST MARSHALL'S OFFICE (PMO)	7002	7-3
EXPLOSIVE ORDNANCE DISPOSAL (EOD)	7003	7-3
SALVAGE PROCEDURES	7004	7-3
INVESTIGATION AND SECURITY RESPONSIBILITY/ PROCEDURES	7005	7-3
PUBLIC AFFAIRS RELEASES	7006	7-3
MISHAP INVESTIGATION SUPPORT	7007	7-3
REPORTING UNAUTHORIZED UNMANNED AIRCRAFT ACTIVITY AND LASER POINTER ACTIVITY	7008	7-3
MV-22 HUNG LANDING GEAR PROCEDURES	7009	7-3

AIRFIELD OPERATIONS MANUAL

CHAPTER 7

EMERGENCY RESPONSE PROCEDURES

7000. GENERAL. The ARFF Standard Operation Procedures (SOP), StaO P11135.1E, provides instructions and procedures for the conduct of Aircraft Rescue and Firefighting operations at MCAS Camp Pendleton.

7001. AIRCRAFT RESCUE AND FIREFIGHTING

1. Aircraft Rescue and Firefighting Division. The ARFF Officer is responsible to the Air Station Operations Officer for the organization, supervision, training, and operational readiness of the ARFF Section. The ARFF Officer, or designated representative, will have complete control of an aircraft rescue and firefighting operation at the immediate scene of an aircraft mishap.

2. Mishap Site. Only essential personnel are authorized access to a mishap site. Additional supporting agencies shall report to the MCAS Camp Pendleton Operations Officer for an escort to the mishap site. Commanding Officers of aircraft involved, the Aircraft Mishap Board, and other authorized personnel will be allowed access to the crash site at the earliest possible time, consistent with safety.

3. Equipment. In accordance with reference (e), Firefighting and support vehicles and equipment shall be on stand-by alert at the ARFF building. ARFF vehicles and support equipment can respond to off-station emergencies.

4. Minimum Response

a. Minimum response requirements are contained in reference (e).

b. Closed Control Tower Operations are authorized on a PPR basis only. ARFF crews will be in an alert status plus or minus 15 minutes of the proposed takeoff or landing time. Arriving aircraft should contact MCAS Camp Pendleton ARFF on frequency 340.2 15 minutes prior to landing and the ARFF Dispatcher should be notified of any canceled operations.

5. On-Station Mishap. If an aircraft mishap occurs at the airfield, aircraft movement on the airfield shall cease. Personnel are required to remain clear of the mishap site, including squadron personnel not assigned to the Aircraft Mishap Board.

6. Off-Station Mishap. Airborne observation of a mishap should initially be reported to the controlling agency. When an off-station mishap is reported to Airfield Operations, ARFF shall be notified as soon as possible with the following information:

- a. Location of the crash.
- b. Type/description of aircraft.
- c. Condition of wreckage and crew status.
- d. Other pertinent information (e.g., fire present; buildings, vehicles, or other aircraft involved, etc.)
- e. Name, activity, location and phone number of person making the report.

7002. PROVOST MARSHALL'S OFFICE (PMO). During an aircraft mishap, security forces will provide perimeter security and restrict access to the mishap site. The Military Police will initially make radio contact with MCAS Camp Pendleton ARFF Dispatch on frequency 340.2 for instruction. At no time will security personnel or vehicles transit aircraft movement areas without positive radio contact with Tower; a radio-equipped vehicle may be utilized to escort security personnel to the mishap site.

7003. EXPLOSIVE ORDNANCE DISPOSAL (EOD). MCB Camp Pendleton EOD will support emergency mishap operations as required per applicable orders and directives. For assistance during working hours, contact MCB EOD at (760)725-6325. After working hours, call (760)207-1442.

7004. SALVAGE PROCEDURES

1. Reporting custodians will assume responsibility for salvage of unit aircraft.

2. Requests for salvage assistance will be coordinated by the Operations Department and must be approved by the Commanding Officer, MCAS Camp Pendleton.

7005. INVESTIGATION AND SECURITY RESPONSIBILITY/PROCEDURES. Responsibility for the investigation and security of aircraft involved in a mishap rest with the aircraft reporting custodian, per reference (f).

7006. PUBLIC AFFAIRS RELEASES. All inquiries regarding aviation mishaps shall be referred to the MCIWEST-MCB Office of Communication Strategy.

7007. MISHAP INVESTIGATION SUPPORT. Requests for ATC audio/video/data recordings or transcripts require a formal request on unit letter head to the MCAS Camp Pendleton ATC Facility Officer. Requests must be approved by the Commanding Officer, MCAS Camp Pendleton. For the requested event, please include the date, time, aircraft call sign and reason for request in the body of the letter.

7008. REPORTING UNAUTHORIZED UNMANNED AIRCRAFT ACTIVITY AND LASER POINTER ACTIVITY. Any observed activity regarding unmanned aircraft or laser pointers will be reported to MCAS Camp Pendleton Air Traffic Control via Flight Clearance at (760) 725-8016 or 8026. Flight Clearance will forward all necessary information to Air Traffic Control to be reported to the Domestic Events Network (DEN).

7009. MV-22 HUNG LANDING GEAR PROCEDURES.

1. Responsibilities and Procedures

a. Tower

(1) Upon notification of an inbound aircraft with malfunctioning landing gear, Tower will activate the Crash Phone.

(2) For aircraft requiring in-flight troubleshooting, Tower will issue holding instructions in Class Delta Airspace above pattern altitude.

(3) For aircraft requiring landing on the Emergency Landing Pad (ELP) (Appendix J), Tower will close the fuel pits and issue the notification on ATIS.

b. Flight Clearance

(1) Upon notification by Tower of an inbound aircraft with malfunctioning landing gear, Flight Clearance will deploy a tow vehicle with a tow hitch to Hangar 6 for mattress and Emergency Landing Response Team (ELRT) pickup. Flight Clearance will provide the ELRT Leader with one hand-held radio for use during the emergency.

NOTE: IF THE AIRCRAFT IS A NON-TENANT AIRCRAFT, FLIGHT CLEARANCE WILL CALL VMM-164 AND/OR VMM-364 TO REQUEST SUPPORT FOR MATTRESSES AND AN ELRT.

(2) Flight Clearance will transport the mattress stacks and ELRT personnel to the ELP.

(3) Flight Clearance will notify the Fuels Section to shut down the hot pits.

(4) Upon delivery of gear and personnel to the ELP, the tow vehicle will return to Hangar 6 for pickup of follow-on gear and personnel.

(5) Upon landing and shutdown of the aircraft, Flight Clearance will escort the tow vehicle and personnel across the runway, entering the ELP from taxiway F2 and using a clockwise flow to stage recovery personnel and equipment.

(6) Flight Clearance tow vehicle driver will maintain communication with Ground and Tower during escort movement on the airfield.

(7) Flight Clearance tow vehicle will return to F1 taxiway and await further instructions from the ARFF On-scene Commander.

c. ARFF

(1) Upon notification of an inbound aircraft with malfunctioning landing gear, ARFF will respond to the ELP per ARFF SOP.

(2) The ARFF On-scene Commander will maintain communication with Ground and Tower for movement on the airfield.

(3) The ARFF On-scene Commander will oversee the incident and once the scene and aircraft are safe, the ARFF On-scene Commander will turn the aircraft over to the Squadron.

d. Fuels. Upon notification of an inbound aircraft with malfunctioning landing gear, Fuels will shut down the hot pits and personnel will shelter in the fuel pits ready shack until the aircraft has landed and shutdown.

THIS
PAGE
INTENTIONALLY
LEFT
BLANK

AIRFIELD OPERATIONS MANUAL

CHAPTER 8

AIRFIELD SECURITY

	<u>PARAGRAPH</u>	<u>PAGE</u>
GENERAL	8000	8-2
AIRFIELD SECURITY PROCEDURES	8001	8-2
PHOTOGRAPHY PROCEDURES	8002	8-3
PUBLIC OR MEDIA EVENTS	8003	8-3
FOREIGN NATIONALS	8004	8-3
INTRUDER AIRCRAFT PROCEDURES	8005	8-3
AIRFIELD PHYSICAL SECURITY	8006	8-3

AIRFIELD OPERATIONS MANUAL

CHAPTER 8

AIRFIELD SECURITY

8000. GENERAL

1. Policy. MCAS Camp Pendleton security regulations can be found in the MCAS Camp Pendleton All Hazards Plan. The MCB Camp Pendleton Provost Marshal's Office (PMO) provides physical security and law enforcement at the Air Station. Marine Corps Base (MCB) Camp Pendleton Military Police provides air station security to ensure only authorized personnel have access to the flight line and aircraft. During normal working hours, flight line access requests with no tenant sponsor can be coordinated through the MCAS Camp Pendleton Mission Assurance Office at (760) 763-0351. Access to the flight line for tenant and non-tenant personnel when the field is closed, must be coordinated with the Station Duty Officer located at building 23123 (760) 763-1154. Immediate Response is dispatched from a Consolidated Dispatch Center, phone number (760) 725-1921.
2. Mission. The primary mission of PMO is to provide physical security of aviation assets aboard the Air Station. Accordingly, access to aircraft and the flight line is limited to authorized personnel only.
3. Notification of Key Personnel. Personnel who witness security violations or unusual events, such as moving vehicle violations, fire, or criminal activity, shall immediately notify PMO Dispatch and the Airfield Operations Officer during working hours or the Station Duty Officer (SDO) after working hours (refer to Appendix D).
4. Colors. The posting and retiring of colors will be performed by off going and on coming Station Duty Officer and ASDO. Pedestrians and vehicular traffic sighting the posting and retirement of colors shall render honors; vehicles should stop until colors are complete.
5. Special Events. Special events may cause the Air Station to alter its daily operations. Airfield Operations will coordinate with PMO to provide security and traffic control for such events.
6. Speed Limit and Parking. The speed limit aboard the Air Station is 15 miles per hour, except where otherwise posted. Speed limits and authorized parking areas are strictly regulated by PMO in accordance with MCB Camp Pendleton and the California Vehicle Code. The parking lot located adjacent to the Aircraft Rescue Firefighting Station Building 2370 in between Kidd Street and Teamwork Street is designated for emergency personnel only. In accordance with FC 4-730-10N this will provide adequate parking based on the total positions assigned, including eight-and 24-hour shift positions.
7. Privately Owned Vehicles (POV). POVs are not allowed on the flight line and aircraft movement areas unless authorized by the MCAS Camp Pendleton Commanding Officer. Recreational vehicles will not be stored aboard MCAS Camp Pendleton.

8001. AIRFIELD SECURITY PROCEDURES

1. Entry Control. StaO 5500.3 publishes procedures for entry into the boundaries of the Air Station. Four entry gates restrict vehicular entry into and exit out of the Air Station:

Gate A: On Administration Rd., adjacent to building 2331.

Gate B: On 11th Street.

Gate C: On 9th Street.

Gate D: On 6th Street, adjacent to the fuel storage area.

2. Flight Line Security. Military Police are responsible for the security of air station assets, the flight line, and aircraft. Sentries are armed and authorized the use of deadly force. Sentries can conduct security inspections of personnel, vehicles, and equipment aboard the air station at any time. A tenant military escort must accompany visiting personnel.

3. Ordnance Areas. Military Police will patrol the ordnance area located on the northeast portion of the airfield. Access to this area is limited to authorized personnel only.

4. Explosive Hazards. Suspected explosive hazards located aboard MCAS Camp Pendleton will be identified to PMO in accordance with StaO 3571.1B and 3571.2A. Contact MCB Camp Pendleton EOD at (760)207-1442.

8002. PHOTOGRAPHY PROCEDURES. Photography is not allowed aboard MCAS Camp Pendleton without authorization. Written authorization must be obtained from the CO MCAS Camp Pendleton through Airfield Operations and always be in the possession of the photographer. Panoramic photos or video of the flight line are not authorized. Photos of the cockpit or internal areas of aircraft are not authorized without the approval of the aircraft custodian.

8003. PUBLIC OR MEDIA EVENTS. Public or media events must be approved by the Commanding Officer prior to the day of the event.

8004. FOREIGN NATIONALS. Official visits by foreign nationals will be approved by HQMC (Code CIC) via Naval message. Foreign nationals visiting MCAS Camp Pendleton in either an official or unofficial capacity must be approved by the Commanding Officer prior to the day of the visit. Foreign nationals will always be escorted.

8005. INTRUDER AIRCRAFT PROCEDURES. When an aircraft lands without prior authorization, Tower will isolate and hold the aircraft clear of the runway and parking ramp until inspected by PMO. Following inspection by PMO, the aircraft will be turned over to Airfield Operations for appropriate handling.

8006. AIRFIELD PHYSICAL SECURITY

1. Only authorized tenant military and civilian personnel will be allowed routine access to the airfield. Airfield access authorization is obtained by tenant unit access rosters and sponsorship letters submitted to the Physical Security Officer in building 23171. Once this security clearance is obtained, authorized personnel will have their ID card scanned and enabled for flight line access. Personnel will then be entered in the Automated Entry Control System. Access to the airfield is then accomplished by swiping through or

holding the scanned ID card to the scanner at the turnstile gates or the vehicle access gates, depending on the clearance granted.

NOTE: ALL NON-GOVERNMENT CONTRACTOR VEHICLES MUST BE REGISTERED THROUGH FLIGHT CLEARANCE (BLDG 2399 725-8016) PRIOR TO ENTERING THE FLIGHT LINE. ALL VEHICLE OPERATORS MUST MEET AIRFIELD VEHICLE OPERATOR REQUIREMENTS IN CHAPTER 9 UNLESS

ESCORTED BY ANOTHER VEHICLE WITH AN AVOC QUALIFIED DRIVER AND EQUIPPED WITH A TWO-WAY RADIO.

2. Personnel on foot are not authorized to use the vehicle access gates. Personnel shall enter the airfield through the turnstiles.

NOTE: INDIVIDUAL PHYSICAL TRAINING IS NEVER AUTHORIZED ON THE FLIGHT LINE. PERSONNEL DESIRING TO RUN ON PERIMETER ROAD FOR PERSONAL PT OR TO RUN THE MCAS CAMP PENDLETON PFT OR CFT COURSES MUST UTILIZE THE PERSONNEL GATES AT THE EAST END OF THE AIR STATION NEXT TO BUILDING 23700 (ARMORY) AND AT THE WEST END OF THE AIR STATION NEXT TO BUILDING 23112. INDIVIDUAL PT ON THE AIRCRAFT PARKING APRONS, TAXIWAYS AND THE TOWAY IS PROHIBITED AT ALL TIMES. PERMISSION TO CONDUCT SQUADRON TRAINING ON THE PRIMARY AIRFIELD SURFACE (INCLUDING THE TOWAY AND FLIGHT LINE) CAN BE REQUESTED THROUGH AIR STATION OPERATIONS AT 725-8386.

3. All additional requests for vehicle access to the airfield will be considered by the Airfield Operations Officer, Deputy Operations Officer or Airfield Operations Chief on a case-by-case basis. The vehicle operator must be able to produce a valid driver's license, airfield driver's license, proof of current insurance, current vehicle registration, and nature of business when requesting vehicle access onto the airfield. Non-tenant requests will be verified with tenant supported agency.

4. Contact Airfield Operations for further information regarding access to the airfield. See Appendix G for Operations Department contact information.

THIS
PAGE
INTENTIONALLY
LEFT
BLANK

AIRFIELD OPERATIONS MANUAL

CHAPTER 9

GROUND VEHICLE OPERATIONS ON THE AIRFIELD

	<u>PARAGRAPH</u>	<u>PAGE</u>
GENERAL	9000	9-2
VEHICLE OPERATIONS ON THE AIRFIELD	9001	9-2
ENFORCEMENT OF AIRFIELD DRIVING REGULATIONS	9002	9-7
AIRFIELD VEHICLE OPERATOR INCIDENT PROCEDURES	9003	9-8
PEDESTRIAN TRAFFIC	9004	9-9
VISITORS ON THE AIRFIELD	9005	9-9
FLIGHTLINE CEREMONIES	9006	9-9
SQUADRON HOME COMINGS	9007	9-10

AIRFIELD OPERATIONS MANUAL

CHAPTER 9

GROUND OPERATIONS

9000. GENERAL. This chapter sets out procedures for ground vehicular operations and pedestrian regulations on the airfield. The various squadrons and supporting units aboard MCAS Camp Pendleton create a high volume of vehicular and pedestrian traffic on and around the airfield. Instructions and procedures for movement around the air station shall be strictly adhered to and enforced to mitigate traffic accidents and runway incursions.

9001. VEHICLE OPERATIONS ON THE AIRFIELD1. Airfield Vehicle Operator's Course (AVOC)

a. Individual units will provide AVOC study guides to all personnel that need to drive a vehicle on the airfield. This study guide will be used to familiarize all personnel with the airfield layout and the regulations governing airfield vehicle operations. The study guide can be found at the following link:

<https://eis.usmc.mil/sites/mcascp/ops/atc/avoc>

b. In accordance with reference (b), all personnel who operate vehicles on the airfield, to include GSE vehicle operators, will be trained in a classroom setting and tested initially and then annually thereafter. Only MCAS Camp Pendleton ATC personnel will conduct this training and administer the test. Attendance at the course will be documented, and an AVOC License will be issued to all personnel who successfully complete the exam.

c. Those individuals with a legitimate need to drive on the runways, taxiways, and other controlled movement areas shall be issued an All-Access AVOC License or "Green Card" after completing the appropriate level of instruction. This license allows them to drive on the movement areas only after receiving approval from the Ground Control (the tower) over the radio. It also allows them to drive on the NON-movement areas such as the parking ramp, fuel pits, CALA, arm/de-arm area, fire/toway lane, or perimeter road. All other personnel will receive a Restricted Access AVOC License or "Red Card" after completing the appropriate level of instruction. This license allows them to drive **only** on the NON-movement areas (toway and parking aprons).

d. Personnel shall have in their possession their government identification and AVOC license any time they are operating a vehicle or GSE on the airfield.

e. All civilians (to include civilian contractors) who require access to drive on the airfield will complete the above requirements to include annual testing. Upon successfully passing the exam, civilians will be issued an AVOC license. Civilian contractors will be issued an AVOC license for the duration of their contract work, or a period of one year, whichever is less.

f. All non-government vehicles (Contractor Vehicles) must be registered through Flight Clearance, by the air station sponsor and vehicle operator prior to any access inside the flight line fence. Privately owned vehicles are not authorized inside the flight line fence without the approval of the MCAS Camp Pendleton Commanding Officer.

g. Vehicle operators must report to Flight Clearance (Building 2399) for a briefing before operating on the flight line, taxiways, or runway. Flight Clearance will issue:

- (1) Airfield vehicle registration placard.
- (2) A two-way radio for communication with Ground Control.
- (3) A vehicle escort as necessary.

h. Operator Requirements. Personnel operating vehicles on the airfield shall have in their possession the following:

- (1) A valid state driver's license.
- (2) A valid operator's permit for the type of vehicle used. If applicable (HMMWV, Forklift, Tug, etc).
- (3) The appropriate Airfield Vehicle Operator's License ("Red Card" or "Green Card").

i. Heavy equipment operations aboard MCAS Camp Pendleton will always have an AVOC certified ground guide.

NOTE: VEHICLE OPERATIONS ON THE AIRFIELD WITHOUT AN AVOC LICENSED DRIVER MAY BE NECESSARY FROM TIME TO TIME. THESE OPERATIONS REQUIRE EITHER AN AVOC "GREEN CARD" QUALIFIED GROUND GUIDE OR APPROPRIATE RADIO-EQUIPPED ESCORT VEHICLE.

2. Perimeter Road/Danger area/"Treeline Road"

a. Perimeter Road. The road that surrounds the Northwest side of the airfield shall be used to the greatest extent possible for access to areas on the north side of the runway. While driving on Perimeter Road, vehicle operators shall use caution and watch for joggers.

b. Ordinance Road. The road that passes between the "Right/Left Grass" and the wooded area ("Ordinance Road" or "Treeline Road") is considered a controlled movement area and vehicles shall not operate here without first establishing two-way radio communication with the tower.

3. Toway

a. A Toway runs along the southeastern edge of the aircraft parking apron directly in front of the hangars and connects to Perimeter Road on either end of the airfield, creating a full loop. This lane serves several purposes:

- (1) It provides a clear path on the flight line for vehicles to transit.
- (2) It ensures that vehicles are not traveling between or near aircraft parked on the apron, reducing the possibility of a collision with an aircraft, equipment, and personnel.

(3) To be used by maintenance personnel to tow aircraft up and down the flight line, allowing them to avoid using taxiway Papa for this purpose.

(4) To be used by emergency vehicles responding to emergencies in the immediate vicinity of the hangars or parking apron.

b. Squadrons are prohibited from blocking the Toway with any aircraft, vehicles, equipment or embark boxes.

WARNING: AIRCRAFT COMPONENTS (BLADES, FUEL PROBES, ETC.) MUST NOT PROTRUDE INTO TOWAY DUE TO RISK OF DAMAGE BY HIGH-PROFILE VEHICLES (I.E., FUEL TRUCKS) TRANSITING THE TOWAY.

4. General Operating Procedures

a. Background. Vehicle operations within the airfield fence are highly controlled due to heightened security and hazards associated with aircraft operations. Vehicle operations are restricted to personnel who have been trained and have passed the MCAS Camp Pendleton Airfield Vehicle Operators Course.

b. GOVs/POVs/Contractor Vehicles. Authorized vehicles include Government, Government-leased, and approved contractor vehicles registered through MCAS Camp Pendleton Flight Clearance. Privately Owned Vehicles are not authorized on the airfield unless specifically approved by the MCAS Camp Pendleton Commanding Officer. Operators of authorized POVs accept full responsibility for any vehicle damage incurred on the airfield. POVs are prohibited in the CALA, on perimeter road, in the fuel pits and inside the fuel farm security fence.

c. All vehicles on the airfield, regardless of whether they are radio-equipped, shall utilize the Toway lane and perimeter road to the maximum extent possible.

d. All vehicles except those responding to an emergency on the airfield shall give way to taxiing aircraft.

e. Vehicles responding to an emergency on the airfield have right of way over ALL vehicles and taxiing aircraft. When an emergency is in progress on the airfield, all other vehicles and taxiing aircraft shall utilize caution and hold their position as advised by ATC.

f. Operators of non-radio equipped vehicles desiring to operate on or near movement areas shall obtain a radio from either their work section or Flight Clearance to maintain positive radio communication with MCAS Camp Pendleton Ground Control (the tower).

g. All non-radio equipped vehicles and personnel are restricted to the NON-movement areas only unless escorted by a radio-equipped vehicle or AVOC certified ground guide. These areas include the parking ramp, fuel pits, CALA, arm/de-arm area, compass rose, fire lane/tow-way lane, and perimeter road. All vehicle operators wishing to proceed onto taxiways, runways, and the grassy areas near them are required to be in positive radio communication with Ground Control (the tower) and must receive specific clearance to enter the movement area. A radio-equipped vehicle must **continuously** escort non-radio equipped vehicles operating on movement areas, AVOC certified ground guide, or aircraft.

h. Only radio-equipped or escorted vehicles will be authorized by Ground Control (the tower) to enter a movement area or cross the active runway.

i. If a radio-equipped vehicle experiences radio failure while operating on a controlled movement area where they were previously in two-way communication with the tower, the vehicle operator shall execute the following procedure.

- (1) Move the vehicle OFF the movement area.
- (2) Call Flight Clearance at (760) 725-8016 and report issue and await instructions.

If Flight Clearance is unavailable

- (3) Face the vehicle toward the control tower.
- (4) Flash the vehicle's headlights.

(5) Actively observe the tower cab windows for a colored light gun signal instructing what to do next.

NOTE: A SOLID GREEN LIGHT GUN SIGNAL APPROVES VEHICLE OPERATORS TO CROSS A RUNWAY OR TAXIWAY, PROCEED, OR GO. A SOLID RED LIGHT GUN SIGNAL MEANS VEHICLE OPERATORS MUST STOP AND HOLD THEIR POSITION. FLASHING RED INSTRUCTS THE VEHICLE OPERATOR TO EXIT THE MOVEMENT AREA. FLASHING WHITE INSTRUCTS THE VEHICLE OPERATOR TO RETURN TO THEIR ORIGINAL STARTING POINT ON THE AIRFIELD. ALTERNATING RED AND GREEN IS A GENERAL WARNING SIGNAL AND IS NOT A CONTROL INSTRUCTION. AFTER RECEIVING THIS SIGNAL, VEHICLE OPERATORS SHOULD EXERCISE EXTREME CAUTION AND BE EXTRA ALERT FOR NEARBY AIRCRAFT.

j. If a radio-equipped vehicle experiences radio failure while operating on the NON-movement areas (parking ramp, fire/vehicle/Toway lane, Perimeter Road, etc.) the vehicle operator shall not enter the controlled movement areas until their radio has been fixed and two-way communication with the tower has been established.

k. The maximum speed for all vehicles operating on any taxiway or the runway is 25 MPH. Vehicles may proceed faster than 25 MPH on these areas only if they are responding to an aircraft emergency, conducting lighting/surface checks, or if they have been instructed by Ground Control (the tower) to "*proceed without delay*", "*expedite*", or do something "*immediately*". The maximum speed for all vehicles operating on Perimeter Road OR the fire/towway is 15 MPH. The maximum speed for all vehicles operating in aircraft parking areas, or otherwise operating directly near any aircraft is 5 MPH. Regardless of location, the maximum speed for any vehicle actively towing an aircraft is 5 MPH. At no time shall any vehicle be driven more than a safe and reasonable speed for the existing daylight, weather, or surface conditions.

l. Vehicles not radio-equipped, or those that have experienced radio failure will **only** utilize the Perimeter Road when proceeding to or from the northwest side of the airfield.

m. All vehicles desiring to access an area on the Northwest side of Runway 21/03 shall make every effort to use the Perimeter Road. Those vehicle operators unable to utilize the perimeter road due to operational necessity, should request to cross the runway at the approach or departure ends.

n. Operators of emergency vehicles shall not activate their vehicle's emergency lights or sirens while driving on the airfield except in the case of either an actual emergency or a simulated emergency.

o. During the day, all vehicles not regularly used on the airfield that are non-radio equipped shall carry and display an orange and white checkered flag attached to a staff flying above the vehicle; or be equipped with an amber beacon/strobe whenever there are flight operations being conducted on the airfield. The flag shall consist of a checkerboard pattern of aviation orange and white squares and shall not be less than one foot by one foot.

p. At night, vehicles will illuminate an amber beacon/strobe (if equipped) or 4-way flashers, as well as headlights and/or park/marker lights. Operators must ensure their headlights do not blind pilots of aircraft on the ground or in the air. If the possibility exists of blinding any pilots, headlights will be extinguished before they create a hazard, and the vehicle will proceed with only amber lights, or parking lights, or will stop moving until the possibility of blinding a pilot no longer exists.

q. Foreign Object Debris (FOD) is an ever-present problem and is everyone's responsibility. Vehicle operators shall cross FOD shakers at vehicle access gates. Upon entering the vehicle access gate and crossing the FOD shaker, the driver will exit the vehicle, check for FOD in the tire treads and ensure that all gear is secure and won't fall out. Additionally, operators shall keep their vehicles on the concrete surfaces to the maximum extent possible to reduce the number of rocks and debris carried onto aircraft operating areas. Unpaved surfaces shall not be used unless necessary to gain access to an area on the airfield. Vehicle operators shall either pick up FOD when observed or report the observed FOD to the Control Tower or Flight Clearance. If the airfield is closed, report FOD areas to the SDO.

r. There are numerous environmentally sensitive areas all around the airfield. Some of these are identified by signs and/or by small marker flags in the ground surrounding these areas. Vehicles straying into environmentally sensitive areas run the risk of destroying endangered wildlife and their habitat. Additionally, MCAS Camp Pendleton could be assessed federally mandated fines, and the operator of the vehicle could be subject to prosecution. Drivers are expected to know where they are and to stay on paved surfaces unless necessary for their work.

s. Vehicles other than Airfield Operations vehicles, and pedestrians are prohibited on the levee wall unless specifically approved by the MCAS Camp Pendleton Commanding Officer.

t. Motor Vehicle Gates. Vehicle operators using any motor vehicle gate (MVG) must wait until the gate has closed completely behind them prior to proceeding onto the airfield. Vehicle operators will not allow other vehicles to proceed through the gates before the gate closes unless the vehicle and operator are known. In the event of an MVG malfunction contact the MCAS Camp Pendleton SDO.

5. Towing Aircraft

a. An aircraft may be towed to any location on the ramp area at squadron discretion.

b. Aircraft being towed shall have wing walkers and a qualified safety observer who shall be ready to apply brakes if necessary.

c. Tow vehicles shall operate with amber headlights and 4-way flashers on during hours of darkness.

d. Aircraft and equipment under tow during hours of darkness shall display aircraft position lights if able or other adequate external lighting to prevent collision by other vehicle/aircraft operators.

NOTE: PERIMETER ROAD IS NOT DESIGNED FOR AIRCRAFT TOWING. TOWING OF AIRCRAFT ON PERIMETER ROAD IS PROHIBITED.

e. Taxiing aircraft have the right-of-way over all vehicles and equipment under tow.

f. While operating on the airfield, tug operators must have in their possession a valid GSE driver's license, an AVOC License, and a valid state driver's license.

9002. ENFORCEMENT OF AIRFIELD DRIVING REGULATIONS

1. Background. From time to time, vehicle operators may accidentally or inadvertently violate the rules governing vehicle operations on the airfield. Violations of these rules typically pose some form of a safety risk to pilots and/or other vehicle operators and need to be treated seriously and properly addressed or corrected in a timely manner.

2. Enforcement Procedures

a. All vehicles operated on the airfield at MCAS Camp Pendleton are subject to being stopped by PMO personnel, the MCAS Camp Pendleton Operations Officer, the Operations Chief, the duty ARFF crew, Flight Clearance section personnel or their designates.

b. Additionally, the ATC tower has the authority to direct vehicle operators to proceed to the base of the tower. This will primarily be used to allow ATC personnel to speak with vehicle operators regarding unsafe actions they have taken while operating on the movement areas. However, at the suggestion of ATC, and with the approval of the Flight Clearance Supervisor (or designated representative in his/her absence), the offending individual's Airfield Vehicle Operator's License may be suspended or revoked on a case-by-case basis.

c. Vehicle operators are required to produce a valid Airfield Vehicle Operator's license and a valid state driver's license at the request of the personnel listed in Sub-Para a.

d. Violations of established airfield driving procedures will be reported to Air Station Operations, MAG-39 Safety, and the individual's Commanding Officer as well as the squadron's Safety Officers. Vehicle operators who are considered a major violator will have their Airfield Vehicle Operator's license suspended or revoked as specified in Sub-Para b.

e. In cases where vehicles are found operated by individuals without a valid Airfield Vehicle Operators license, the operator will automatically be escorted to and detained at MCAS Flight Clearance. The individual's Squadron

Gunnery Sergeant or Staff Non-Commissioned Officer in Charge will be required to come to Flight Clearance to pick up the operator.

9003. AIRFIELD VEHICLE OPERATOR INCIDENT PROCEDURES.

1. In the event a vehicle operator on the airfield violates any rules, regulations, or procedures and/or cause a safety risk of any kind, they will be subject to the procedures listed below:

2. Depending on the severity of the violation (as determined by the ATC Tower Watch or Flight Clearance Supervisor on duty) the violator will be subject to one or more of the following actions.

a. A verbal and written counseling from Air Traffic Control or Flight Clearance Supervisor regarding the incident. The driver shall be present in the Flight Clearance Office for the counseling at a time determined by ATC or Flight Clearance.

b. A one-month suspension of the individual's Airfield Vehicle Operator's License. (May be approved by the Flight Clearance Supervisor on duty at the time of the incident).

c. A six-month suspension of the individual's Airfield Vehicle Operator's License. (Must be approved in writing by the MCAS Deputy Operations Officer). After the six-month suspension, the vehicle operator must retake the AVOC, pass the written exam and coordinate with the AVOC lead instructor to pass an airfield driving test.

d. A one-year suspension of the individual's Airfield Vehicle Operator's License. (Must be approved in writing by the MCAS Deputy Operations Officer). After the one-year suspension, the vehicle operator must retake the AVOC, pass the written exam and coordinate with the AVOC lead instructor to pass an airfield-driving test.

3. The MCAS Camp Pendleton Operations Officer has the final authority regarding all matters pertaining to the duration of any suspension of airfield driving licenses.

4. Should a vehicle operator have three or more violations in a period of 90 days it will carry an automatic six-month suspension of airfield driving license.

5. The Tower Watch Supervisor on duty at the time of the incident has the authority to suspend the violating individual's Airfield Vehicle Operator's License until the Flight Clearance Supervisor or the Operations Officer can determine a suitable action. This is intended to ensure that the violating individual does not continue to endanger air safety.

a. Full Quiet Hours. Vehicle Operators are responsible for knowing when MCAS Camp Pendleton is in Full Quiet Hours. Vehicles will not be operated inside the flight line fence when Full Quiet Hours are in effect. Quiet hours are published in the daily brief sheet, which is available in the Flight Clearance office, Bldg. 2399.

b. NITEX (NVG ops). Additionally, vehicle operators are responsible for knowing when NITEX (Night Vision Goggle Operations) is in effect aboard MCAS Camp Pendleton. Vehicles must maintain a high degree of light discipline during these periods to avoid blinding pilots flying with NVGs. NITEX hours are published in the daily brief sheet, which is available in the Flight Clearance office, Bldg. 2399.

9004. PEDESTRIAN TRAFFIC

1. Airfield pedestrians are personnel authorized by MCAS Camp Pendleton Operations or tenant units to be on the flight line in direct support of flight operations. Pedestrians not in direct support of flight operations shall always be under escort to ensure their safety and security of airfield assets.

a. Pedestrians on the flight line are required to always wear eye and ear protection or appropriate proper protective equipment.

b. Physical training directly on the airfield is strictly prohibited. Individuals may, however, conduct physical training on Perimeter Road. Individuals choosing to do so must carry their common access card and utilize the entry/exit points at the Far East and West turnstiles (those nearest the armory and the fuel farm). Pedestrians should be alert for aircraft in the arming area and shall not cross in front of those aircraft at any time. The electronic gates and signs near the Arming/De-arming pad identify the hazard area when aircraft are arming or de-arming. Unit physical training on the flight line can only be conducted outside of airfield hours and with approval of the MCAS Camp Pendleton Operations Department. Only individual physical training can be conducted on perimeter road during airfield hours. Unit PT must be approved and coordinated through the MCAS Camp Pendleton Operations office (760) 725-8386. Approved training will be complete 30 minutes prior to airfield opening.

c. Pedestrians are prohibited on the airfield levee wall.

9005. VISITORS ON THE AIRFIELD

1. Non-scheduled/non-sponsored visitors to the Air Station are required to report to the SDO at building 23123. Visitors to tenant squadrons are required to report directly to the Squadron Security Manager or the Squadron Duty Officer as appropriate. Public or media events must be approved by the MCAS Camp Pendleton Commanding Officer prior to the day of the event.

a. During normal working hours, the visitor's sponsoring unit will be responsible for them.

b. After normal working hours the access notification process will consist of the Squadron Duty Officer alerting PMO and the Flight Clearance section that entry to the secured aircraft parking area is required. Requests for after hours access must be coordinated prior during normal business hours with the Flight Clearance section.

c. Civilian contractors must report to Flight Clearance (building 2399) for instructions and clearance to the flight line and aircraft movement areas.

9006. FLIGHTLINE CEREMONIES.

1. Ceremonies on the flight line have a negative impact on flight operations and should be kept to a minimum. MAG-39 tenant units desiring to conduct a ceremony on the flight line apron must request permission from MAG-39 Operations. HMLA-775 and non-tenant units must request permission from the

MCAS Camp Pendleton Operations Department. Ceremonies are limited to one hour.

2. Due to the dynamic nature of the flight line and associated hazards, ceremonies will only be conducted on the flight line if Full Air Station Quiet Hours have been approved for the event.

3. Tenant unit ceremonies will be held in front of tenant squadron hangars. Requests for the use of the Visiting Aircraft Line can be made by calling (760) 725-8386.

4. Units that plan to hoist the American Flag between two cranes for the ceremony must get permission from the MCAS Camp Pendleton Operations Department. Permission to hoist the flag on the day of the ceremony is also required as the cranes are considered obstructions to navigation and weather conditions must be evaluated.

5. There are no quiet hours associated with ceremony practices. Covers cannot be worn for practice when flight operations are in progress due to FOD hazard.

6. Units conducting the ceremony are responsible for coordinating access of their guests and maintaining control of their guests throughout and after the ceremony. Guests should not be left unattended after the ceremony ends and all guests should be off the flight line no more than 20 minutes after the completion of the ceremony. Guests should adhere to air station photography restrictions, and it is the responsibility of the hosting unit to enforce the policy.


7. Units conducting the ceremony are encouraged to provide toway road guards on either side of the ceremony to prevent vehicle incursion on the ceremony.

9007. SQUADRON HOME COMINGS. Unit rotations are very active events that involve both the members of the unit, and family/friends of the members that come to welcome them home from deployments. Coordination for unit homecomings includes air station security, photography, aviation operations, Family Readiness, and transportation. Sponsoring units and/or advanced parties should ensure that the MCAS Camp Pendleton Operations Department (760) 725-8386, is involved in the planning and execution of the homecoming event.

THIS
PAGE
INTENTIONALLY
LEFT
BLANK


APPENDIX A

RUNWAY 21 VFR ARRIVAL AND DEPARTURE ROUTES

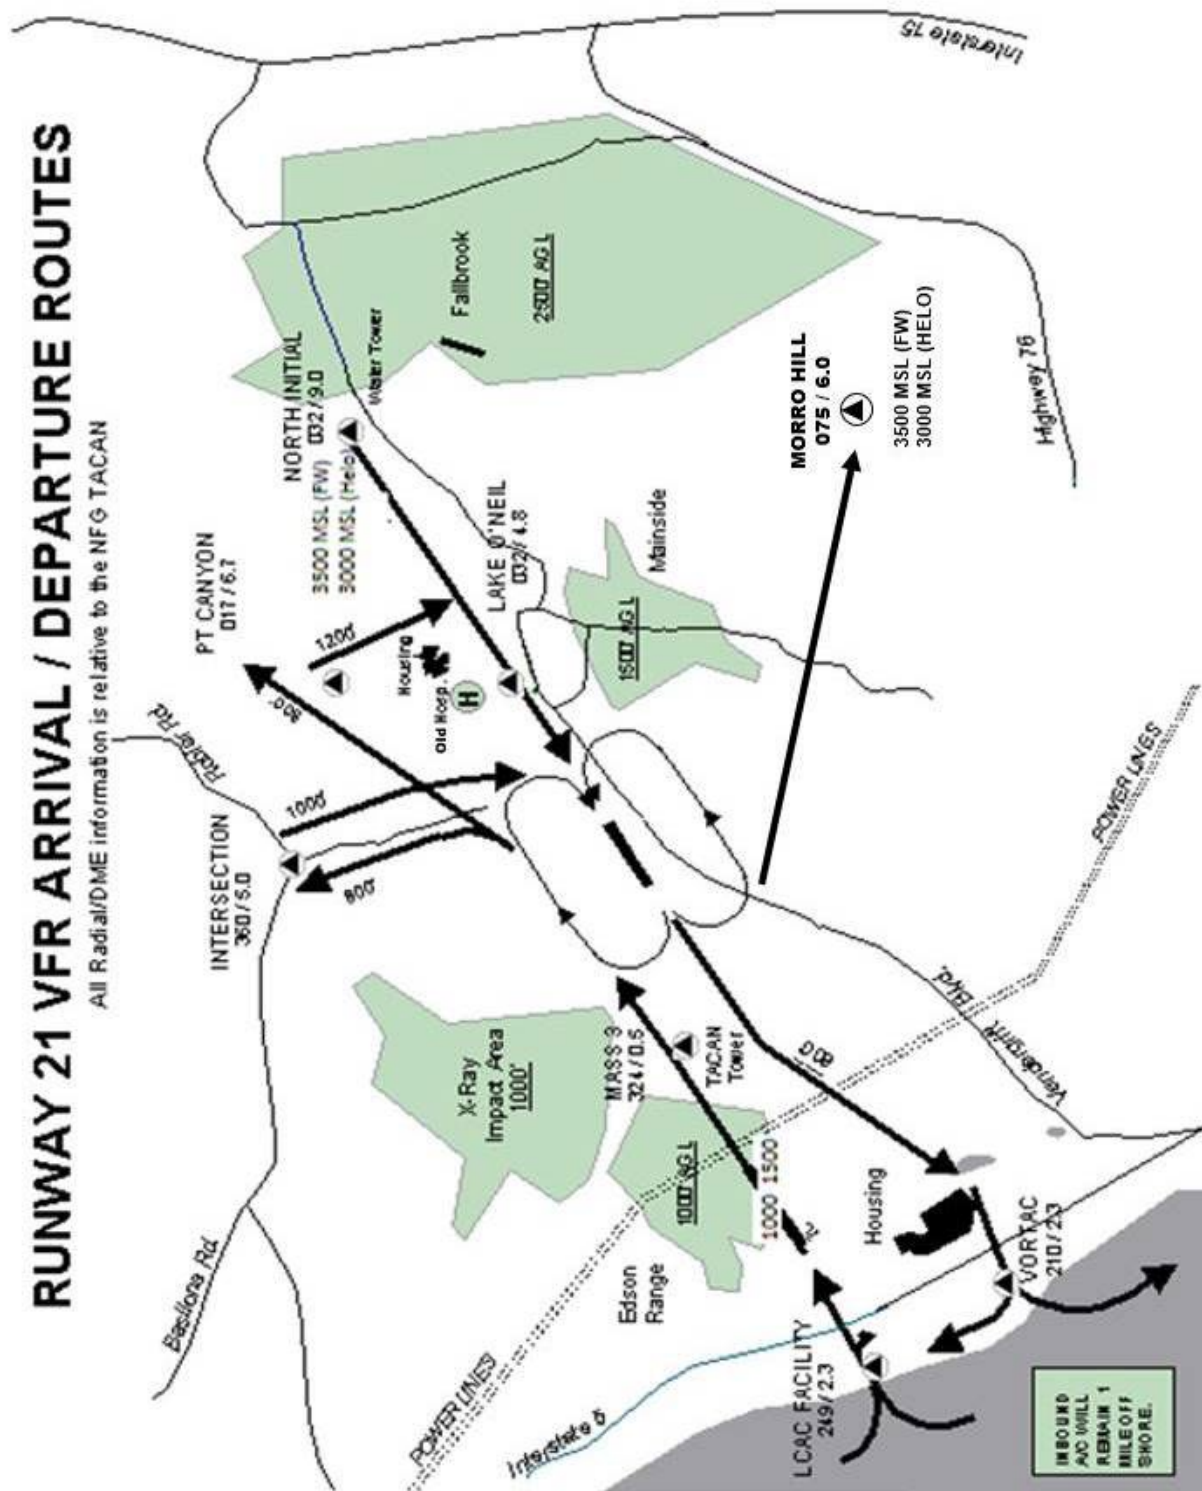


APPENDIX A

RUNWAY 3 VFR ARRIVAL AND DEPARTURE ROUTES

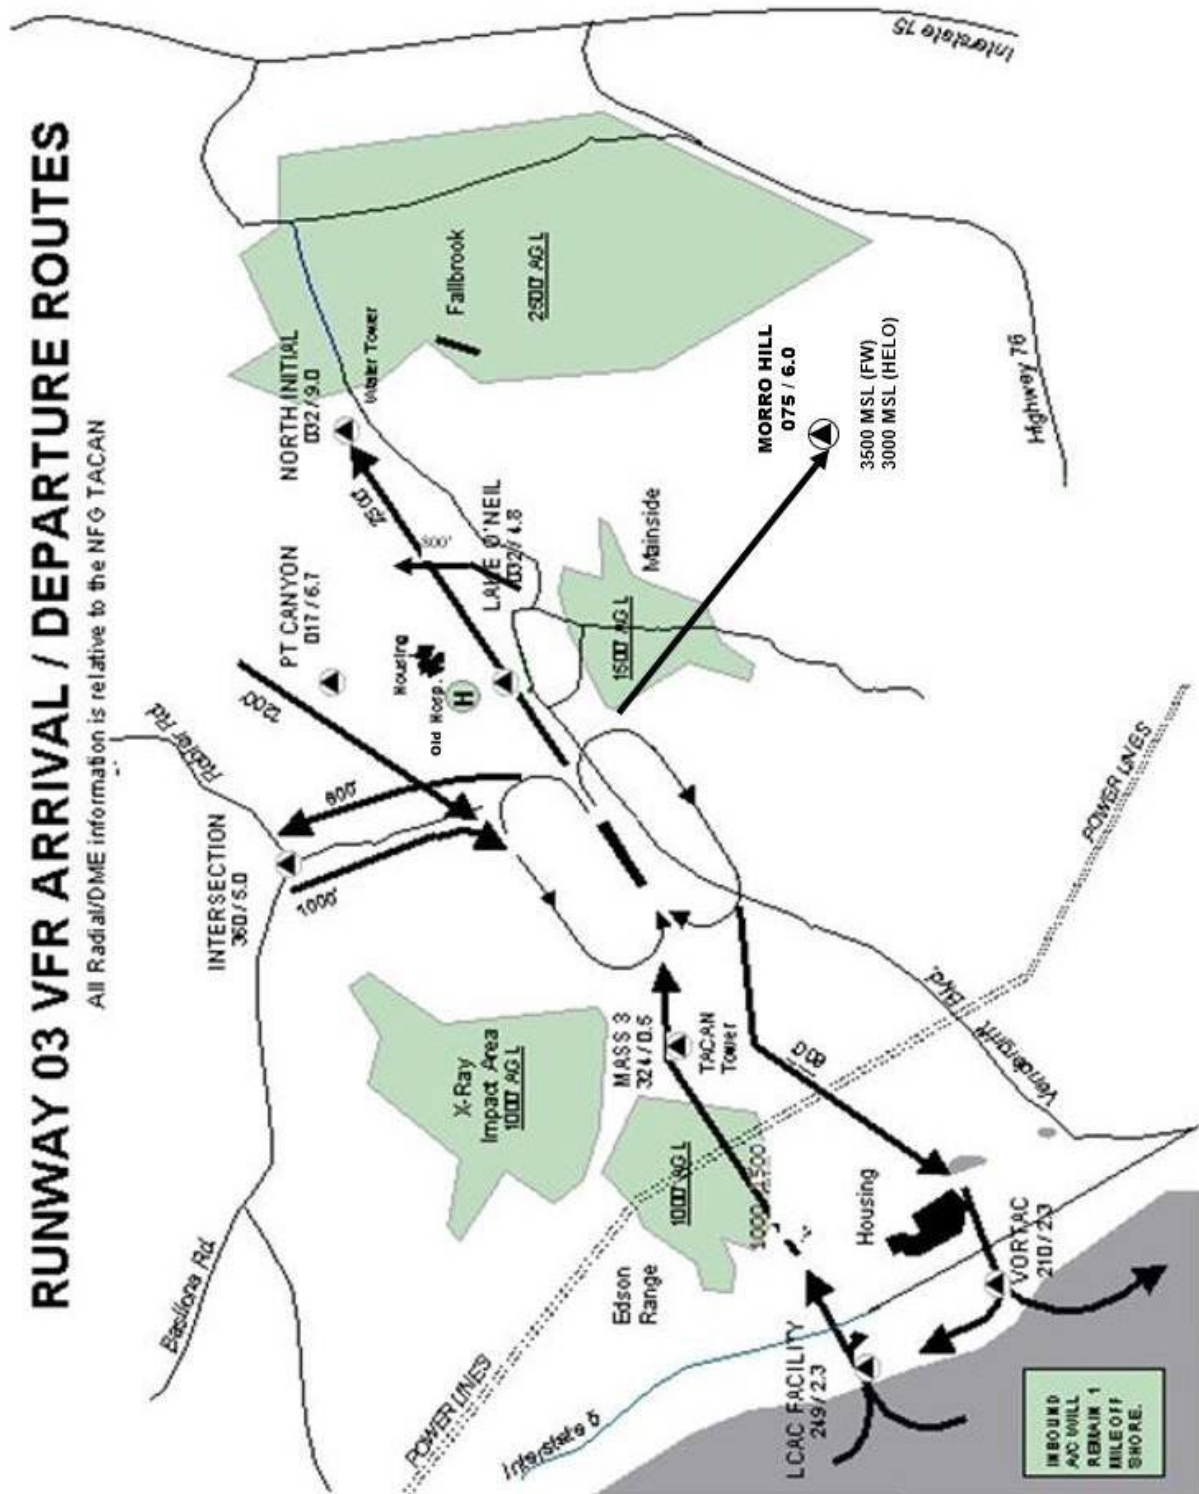


SVFR ARRIVAL / DEPARTURE ROUTES

All Radial/DME information relative to the NFG TACAN

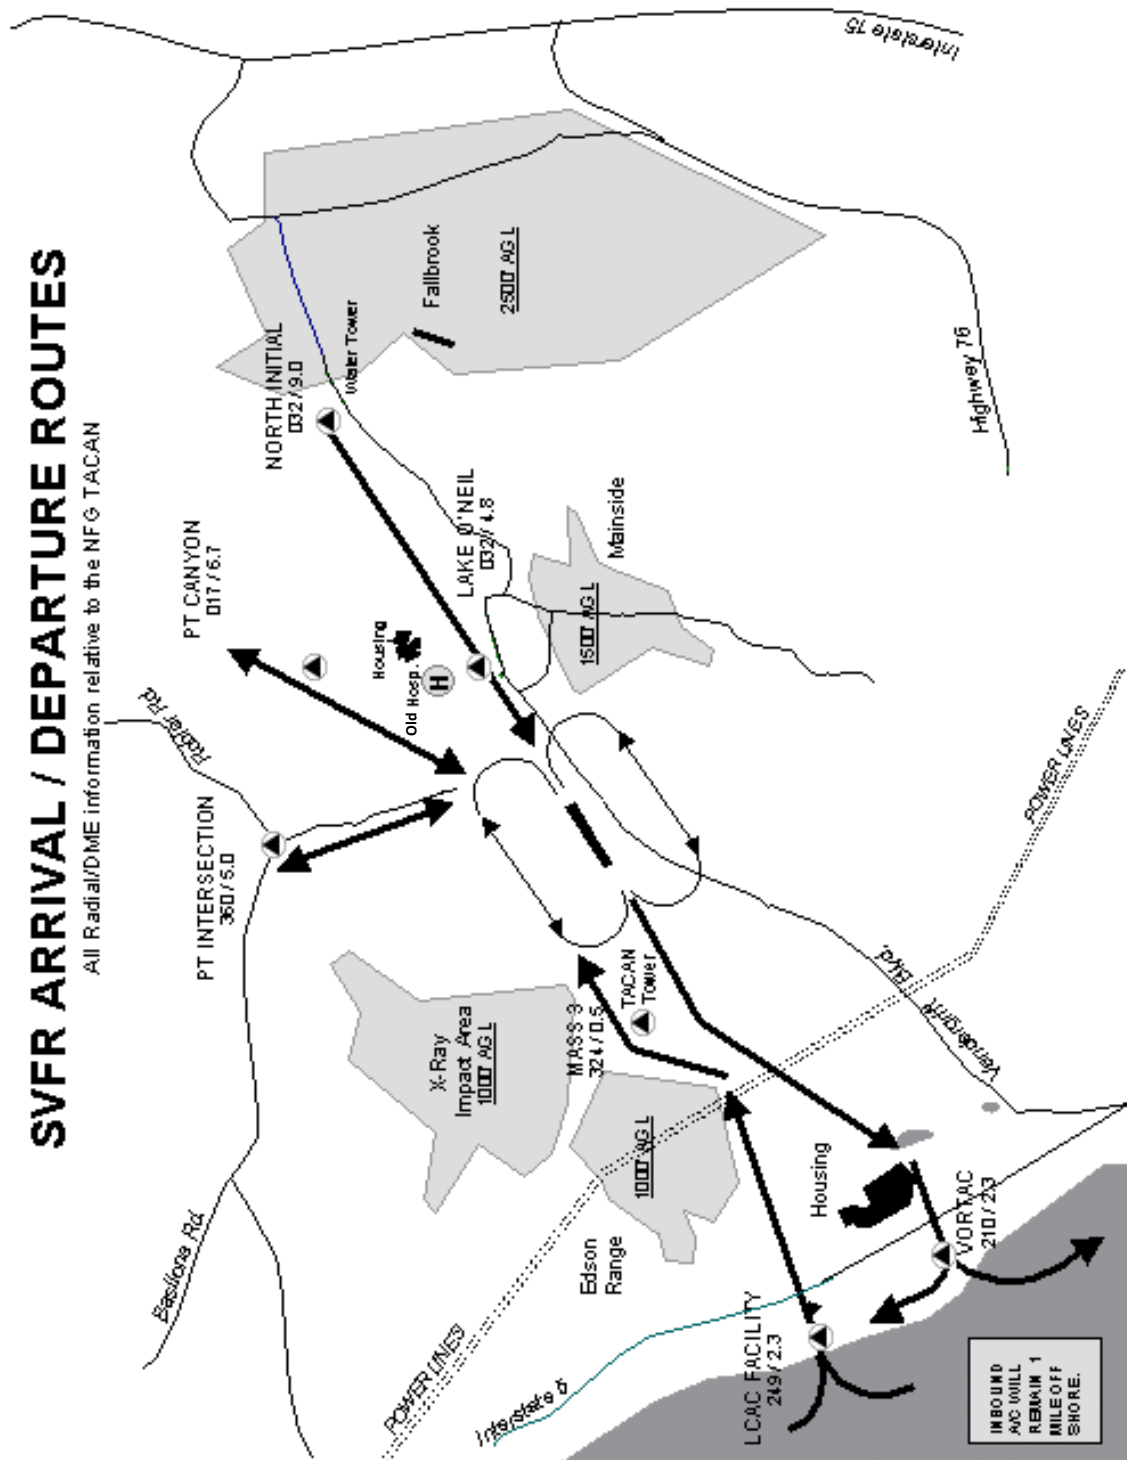

APPENDIX B
AIRFIELD DIAGRAM

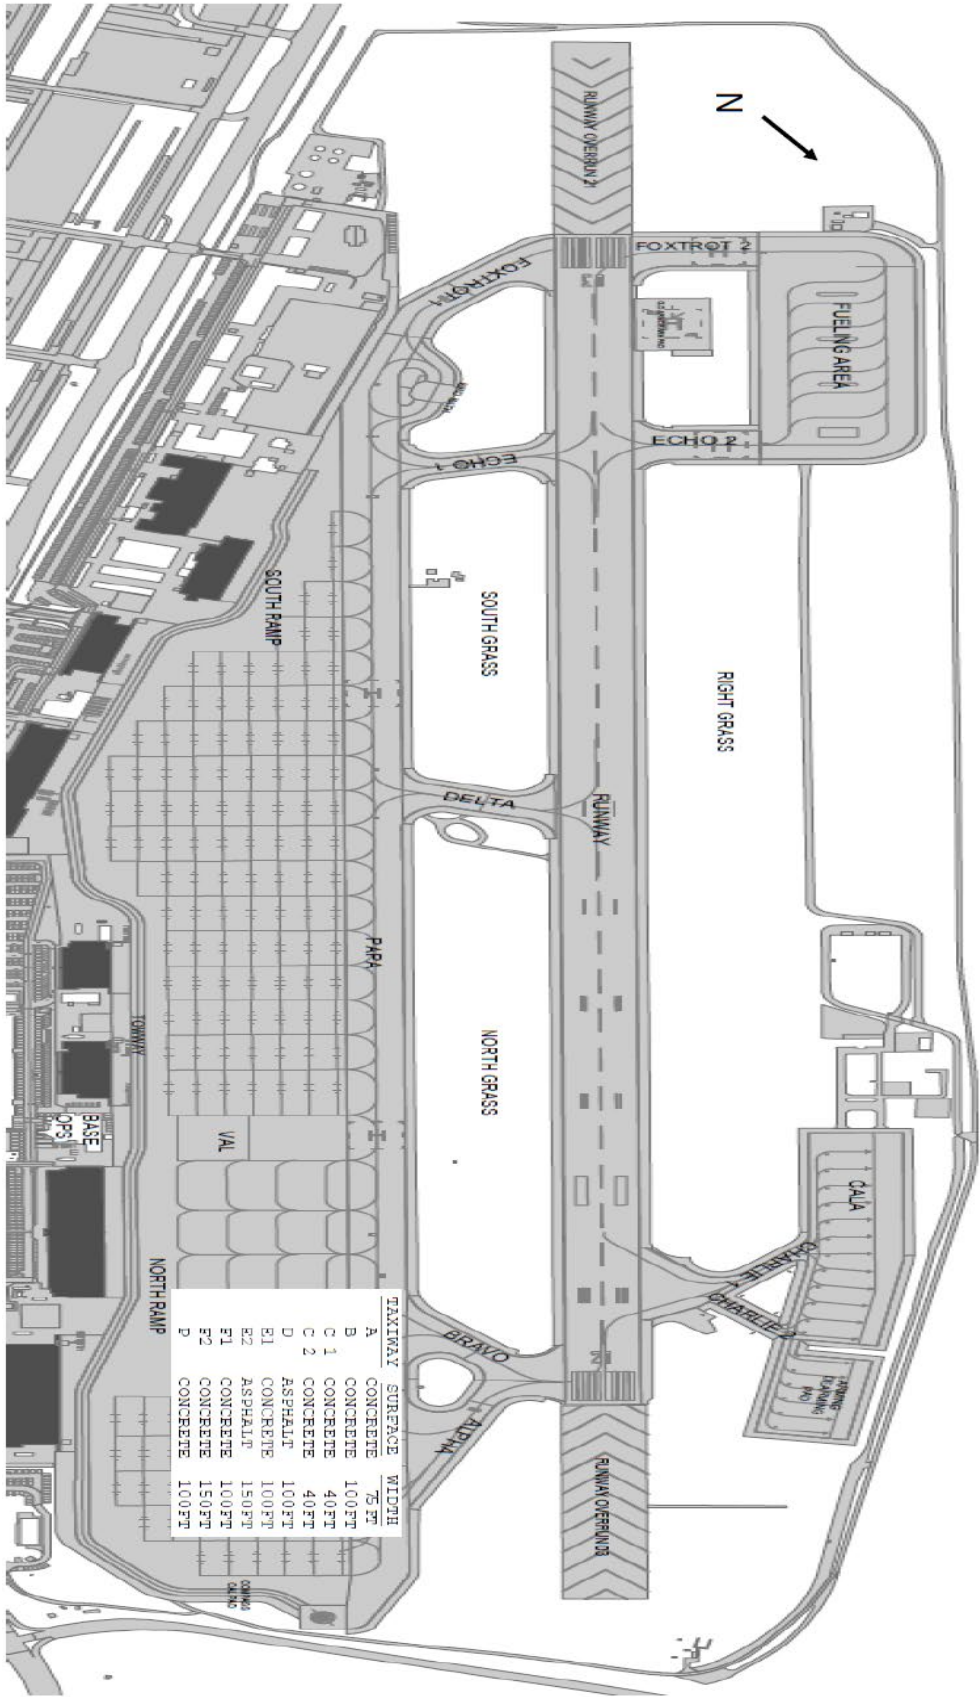

APPENDIX C

PHONE DIRECTORY

Camp Pendleton. Area code (760). DSN numbers are 365+(last 4) for numbers that begin with 725, 361+(last 4) for numbers beginning with 763, or 371+(last 4) for numbers beginning with the 719 prefix.

MCAS

Airfield Operations Officer	725-8387
Airfield Operations	725-8386/4562
Airfield Operations (Fax)	725-8012
Air Traffic Control	725-0368
ARFF Dispatcher	725-4707
ARFF EMERGENCY	725-3877
Fuels Division (hot fuel service)	763-3286
Fuels Division (cold fuel service)	725-3430
Flight Clearance	725-8016
Flight Clearance (Fax)	725-8012
Air Traffic Control Maintenance Dept (ATCMD)	725-0367
ATCMD After Hours	(760) 207-2528
HAZMAT	725-8460
Military Police (MCAS)	725-1921/763-0018
Safety	725-8020/8381
Station Duty Officer	763-1154
Weather Forecaster	725-3327
Weather (Fax)	725-8012

MCB

Air Space Management	725-8183/8437
Comm Center	725-6368/6562
PMO Dispatcher (MCB)	725-3888
Explosive Ordnance Disposal	725-2541
Range Control (LONGRIFLE)	725-4604
Range Scheduling	725-3510/4219

Fleet Area Control and Surveillance Facility (FACSFAC)

Duty	DSN 735-1777, (619) 545-1777
-------------	---

U.S. Coast Guard

San Diego Detachment	(619) 683-6470/6471
San Diego EMERGENCY	(619) 295-3121/3122
Los Angeles Detachment	(310) 732-2043

Rescue Coordination Center, Langley AFB, Virginia

Duty	DSN 574-8112, (800) 851-3051
-------------	-------------------------------------

APPENDIX D


MCAS CAMP PENDLETON CLOSED FIELD OPERATIONS PHONE AND FREQUENCY LIST

Base Ops	Freq: 265.0 Phone: (760) 725-8386 (DSN 365)
Metro/Weather office (For weather and Metro services)	Freq: 342.7 Phone: (760) 725-3327 (DSN 365)
Miramar Metro/Weather (24/7 SVC)	Freq: 342.4 Phone: (858) 577-1553 (DSN 267)
ARFF	Freq: 340.2 Phone: (760) 725-4707 (DSN 365)
ATCMD	Phone: (760) 763-0048 (DSN 361)
MCB PMO	Phone: (760) 725-1931 (DSN 365)
Fuels Division	Phone: (760) 725-3286 (DSN 365)
Airfield Operations Officer	Phone: (760) 725-3805 (DSN 365)
Deputy Airfield Operations Officer	Phone: (760) 763-5275 (DSN 361)
Visiting Aircraft Line (VAL)	Phone: (760) 763-7775 (DSN 361)
Flight Planning	Phone: (760) 725-8016 (DSN 365)
MCAS Duty Officer	Phone: (760) 763-1154 (DSN 361)
SOCAL TRACON (To request IFR)	Freq: 323.0/UHF or 127.3/VHF Phone: (800) 448-3724 (OPT #5)
SOCAL TRACON (To cancel IFR)	Phone: (858) 537-5916
SOCAL TRACON (Emergencies/ILS or TACAN outages only)	Phone: (858) 537-5900

APPENDIX E

LOCAL TRAFFIC PATTERN

ALL ALTITUDES ARE IN FEET MSL

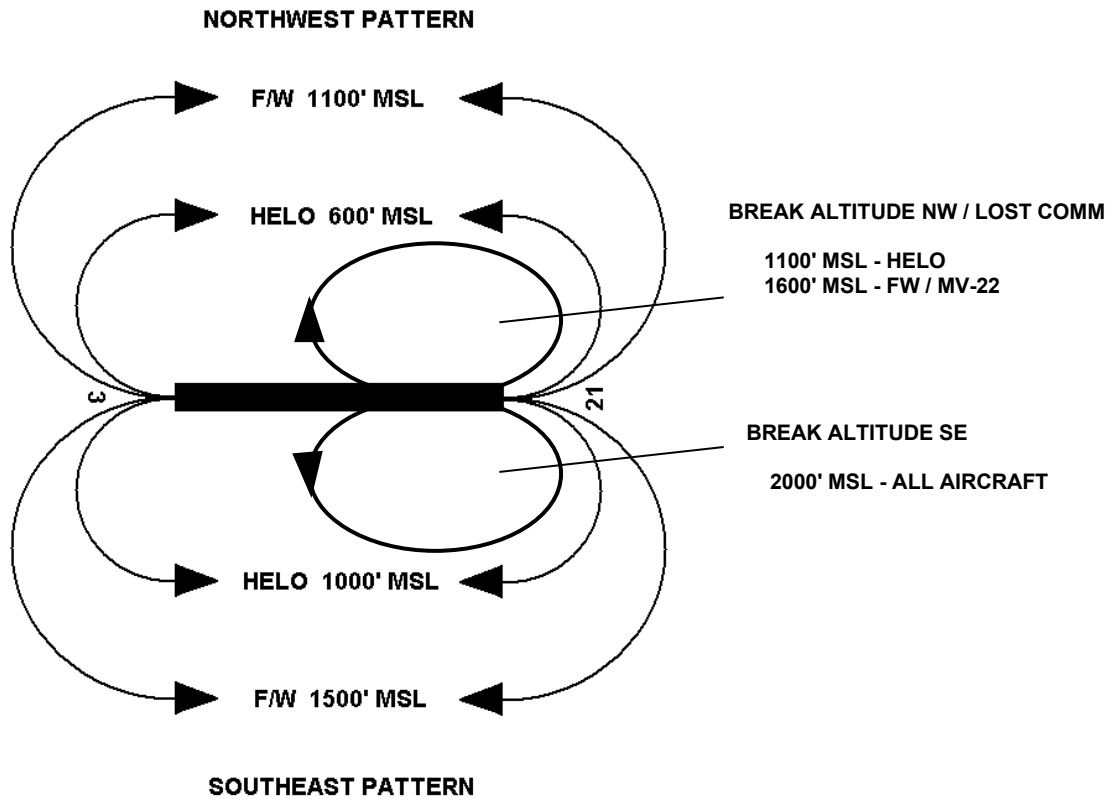

CLASS "D", CLASS "E", AND LIMA AIRSPACE



APPENDIX G

RADIO FREQUENCY DIRECTORY

MCAS

Tower UHF (Primary)	340.2
Tower UHF (Secondary)	340.2
Tower VHF	128.775
Ground UHF	360.2
Ground VHF	128.775
ATIS	285.450
Clearance Delivery UHF	271.6
Clearance Delivery VHF	134.675
Base Ops	265.0
GCA	236.3
Camp Pen Metro	342.4

Range Control (LONGRIFLE)

UHF	310.3
VHF	123.2
FM (Primary)	30.35
FM (Secondary)	40.35

Squadron Base frequencies


Hangar 2	265.2
Hangar 3	284.4
Hangar 4	307.5
Hangar 5	310.1
Hangar 6W	344.375
Hangar 6E	342.6
Hangar 7W	283.0
Hangar 7E	270.4

Other

TALA	254.95
------	--------


APPENDIX H

CALA AND ARMING/DEARMING AREA DIAGRAM

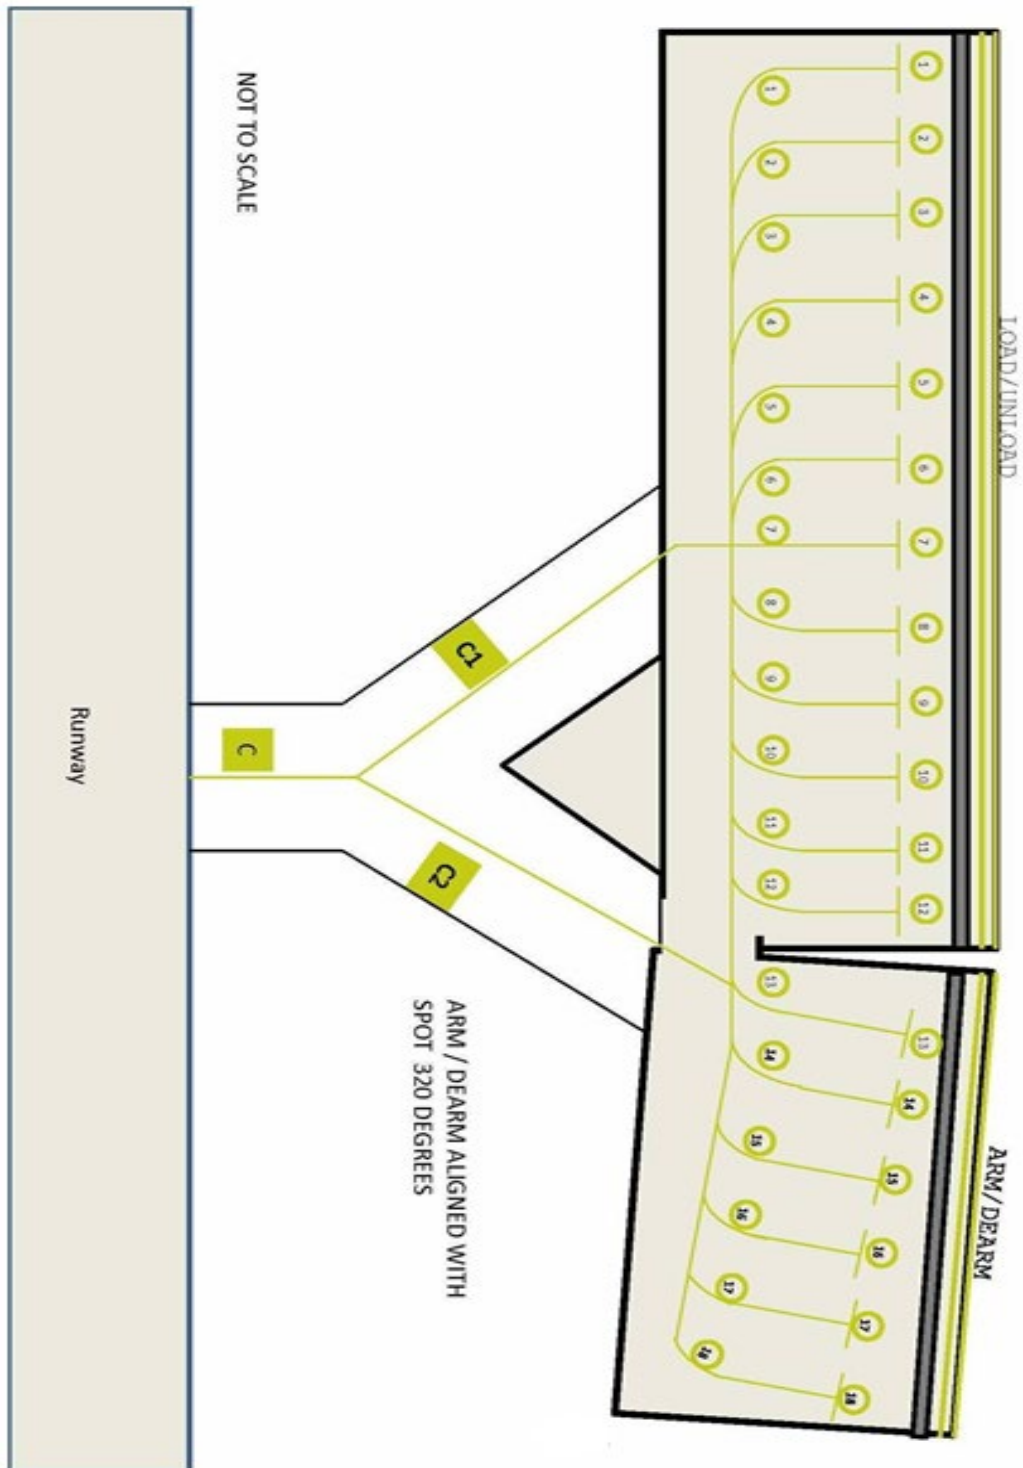


APPENDIX I

AIRCRAFT HOT REFUELING PITS (HELO)

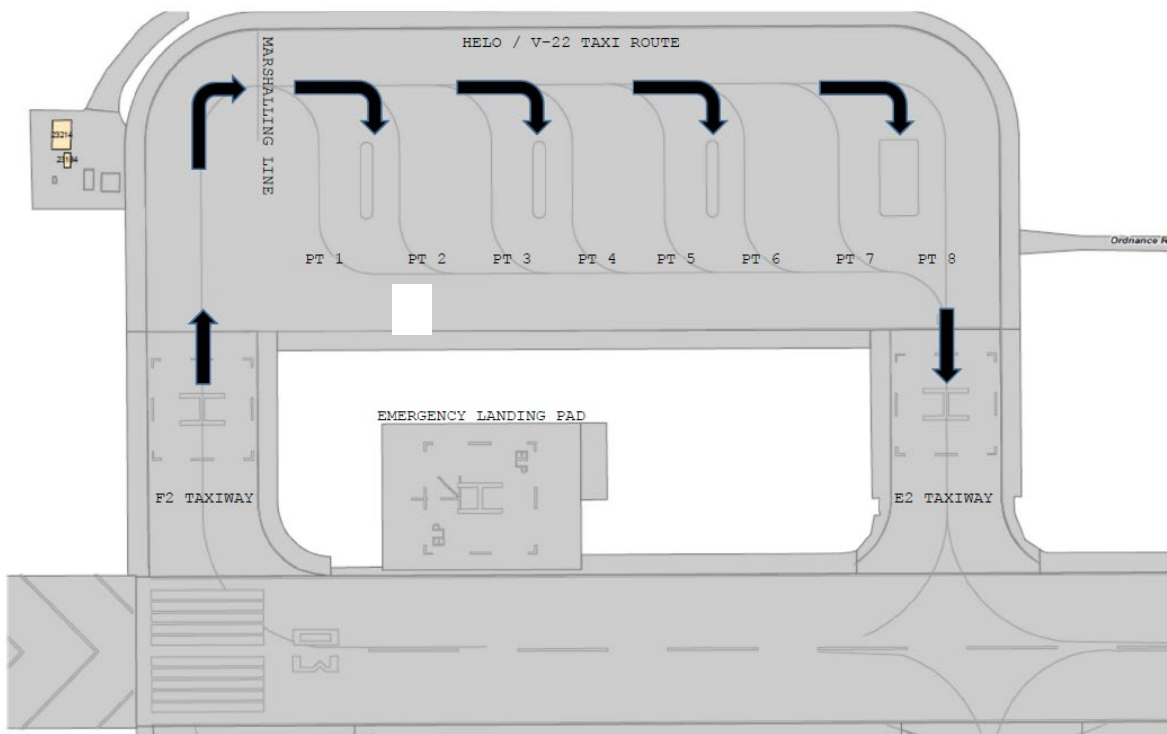


AIRCRAFT HOT REFUELING PITS (C-130)

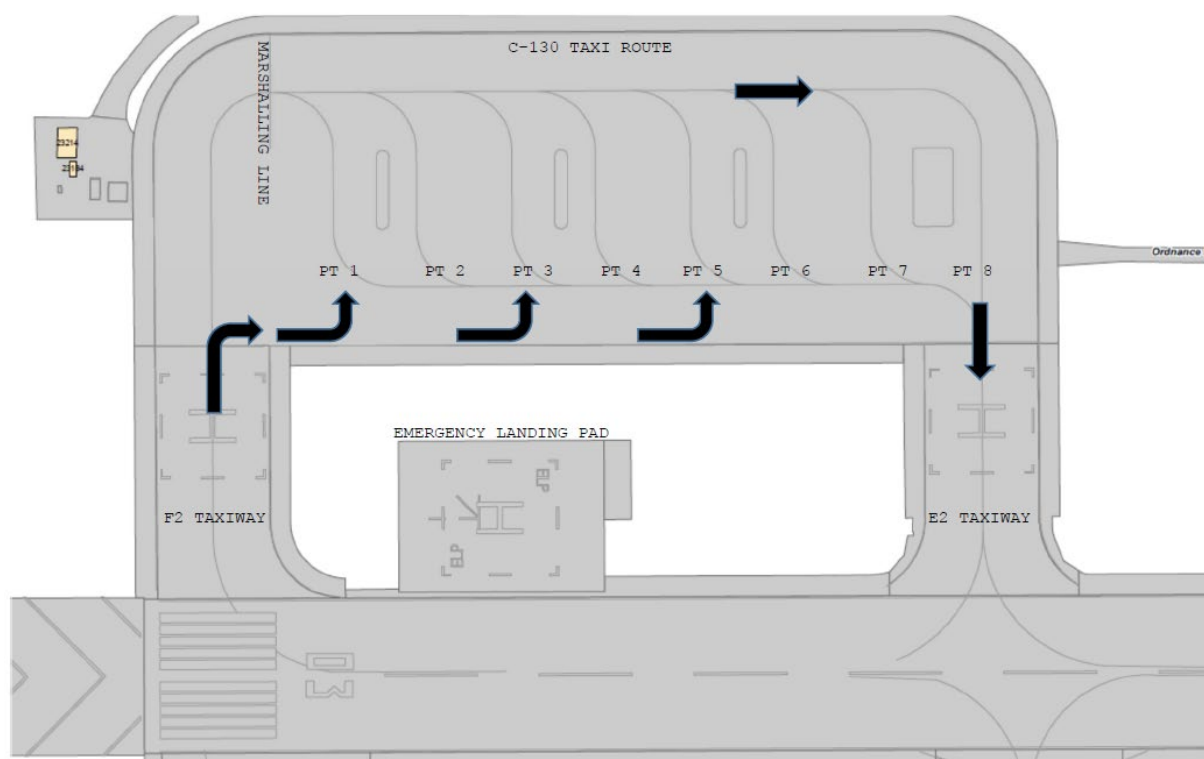

APPENDIX J

EMERGENCY LANDING PAD (ELP)

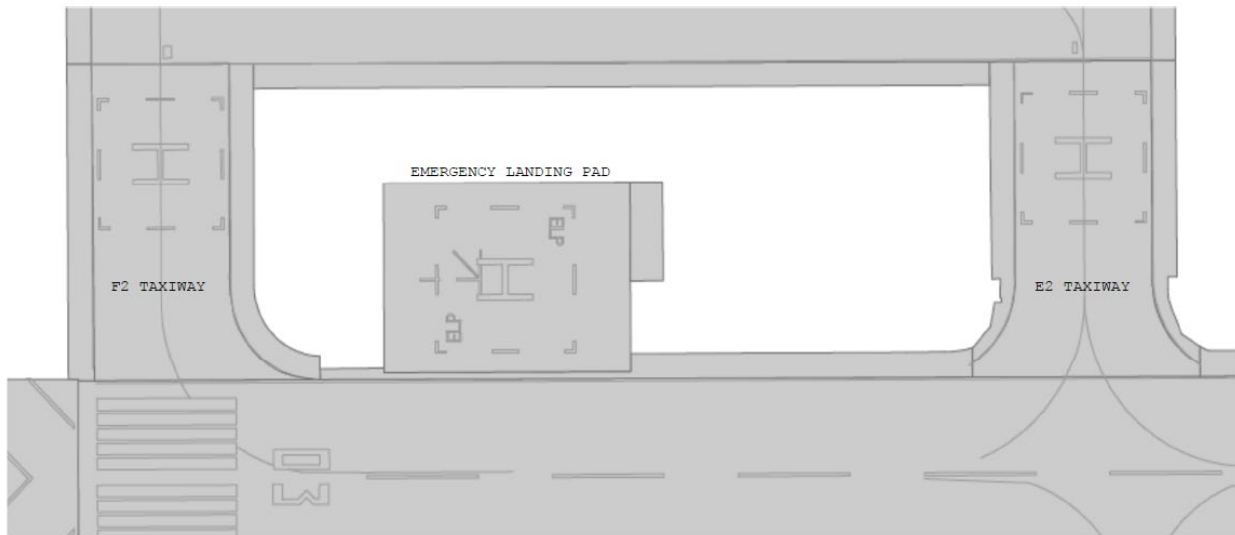

APPENDIX K

WEIGHT BEARING CAPACITY

1. MCAS Camp Pendleton utilizes the Aircraft Classification Number/Pavement Classification Number (ACN/PCN) system to determine runway/taxiway weight bearing and aircraft weight compatibility. The ACN/PCN System is the ICAO standard method of reporting pavement strength. The PCN has been established by an engineering assessment of the runway. The PCN is for use in conjunction with an ACN. The PCN for KNFG is 80FCWT and is located in the IFR Supplement. Taxiway and apron weight bearing capacity at KNFG is more restrictive than the runway bearing strength. The ACN's for DOD aircraft are located in the Flight Information Handbook.

2. Some restricted landings are permitted. Contact Airfield Operations with waiver requests.

Parking Aprons

South
PCN 52 RC

North
PCN 53 RC

S: XXX
T: 172K lbs
ST: 175K
TT: 323K
SBTT: 470K
TDT: 840K
TRT: 585K

Taxiways

A, B, D, E1
E2, F1, F2
PCN 52 RC

C, P,
PCN 53 RC

S: XXX
T: 172K lbs
ST: 175K
TT: 323K
SBTT: 470K
TDT: 840K
TRT: 585K

Runway

03 & 21

PCN 80 FCWT

S: XXX
T: 172K lbs
ST: 175K
TT: 323K
SBTT: 593K
TDT: 840K
TRT: 585K

S: Single Wheel

C-23, F-15, F/A-18, T-1, T-2C, T-39A, P-2, S-3B, E-2C, T-34, T-45, C-12, C-20, C-21, UC-35, C-37

T: Twin Wheel

P-3, CH-46, DC-9, CH-53, B-727, B-737 (C-40), C-7, C-9B, C-118A, C-121, C-140, C-22

ST: Single Tandem

C-130

TT: Twin Tandem
KC-135, DC-10-10, DC-10-10CF, L-1011, B-707, B-757, B-767, E-3A,
E-6A

SBTT: Single Belly Twin Tandem
DC-10-30, KC-10

TDT: Twin Delta Tandem
C-5A

TRT: Triple Tandem
C-17