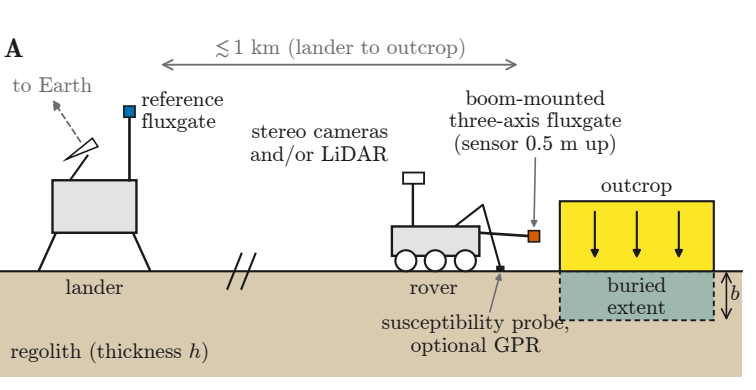
A
≲1 km (lander to outcrop)
to Earth
reference fluxgate
stereo cameras and/or LiDAR
boom-mounted three-axis fluxgate (sensor 0.5 m up)
outcrop
lander
rover
buried extent
b
susceptibility probe, optional GPR
regolith (thickness h)

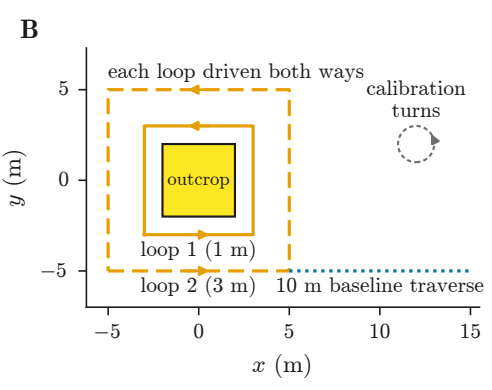
B
each loop driven both ways
calibration turns
outcrop
loop 1 (1 m)
loop 2 (3 m)
10 m baseline traverse
y (m)
x (m)
5
0
−5
−5
0
5
10
15