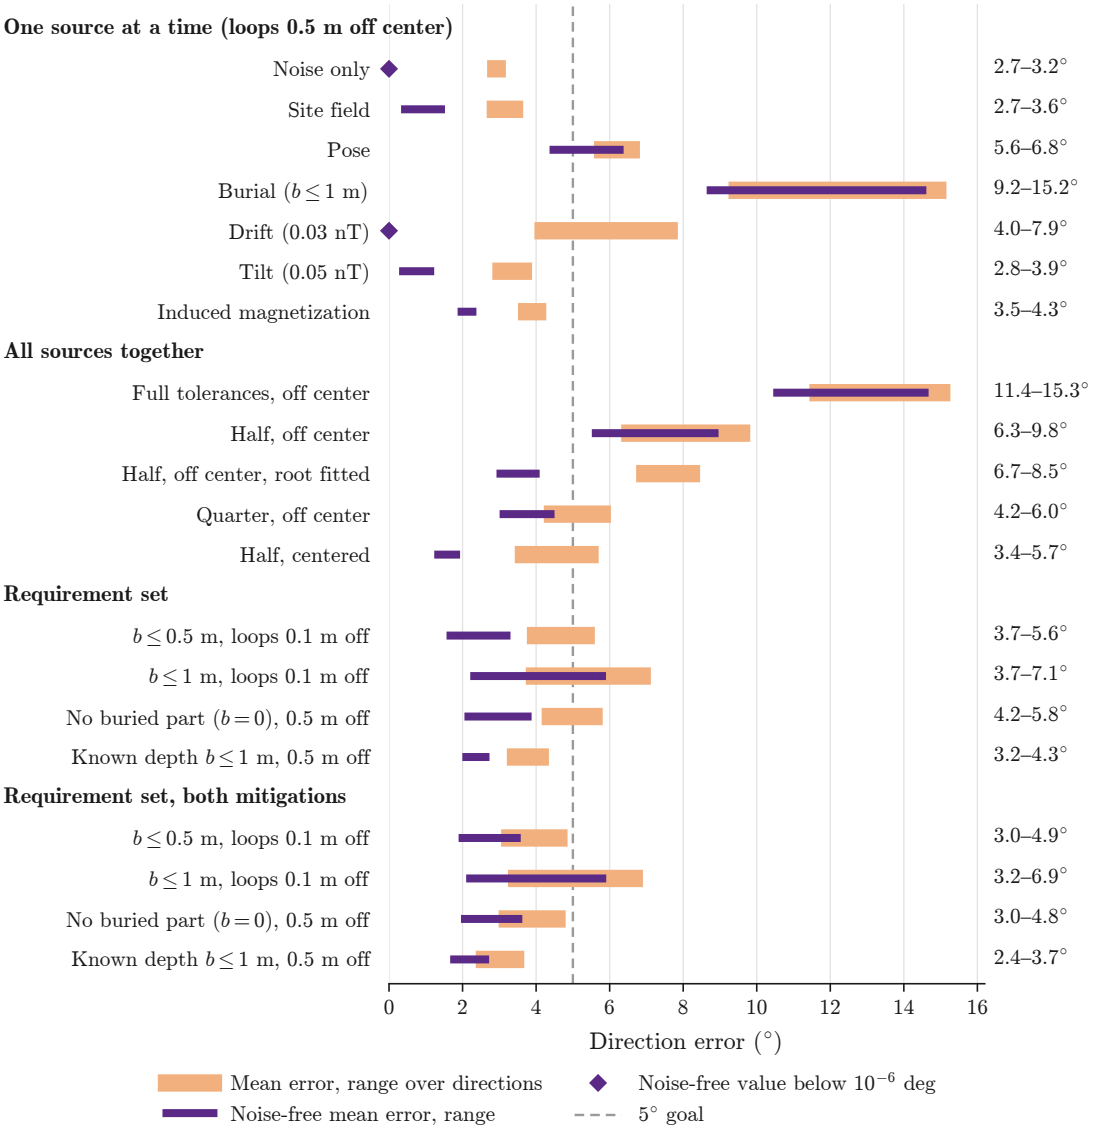
One source at a time (loops 0.5 m off center)
Noise only
Site field
Pose
Burial ($b \leq 1$ m)
Drift (0.03 nT)
Tilt (0.05 nT)
Induced magnetization
All sources together
Full tolerances, off center
Half, off center
Half, off center, root fitted
Quarter, off center
Half, centered
Requirement set
$b \leq 0.5$ m, loops 0.1 m off
$b \leq 1$ m, loops 0.1 m off
No buried part ($b = 0$), 0.5 m off
Known depth $b \leq 1$ m, 0.5 m off
Requirement set, both mitigations
$b \leq 0.5$ m, loops 0.1 m off
$b \leq 1$ m, loops 0.1 m off
No buried part ($b = 0$), 0.5 m off
Known depth $b \leq 1$ m, 0.5 m off
2.7–3.2°
2.7–3.6°
5.6–6.8°
9.2–15.2°
4.0–7.9°
2.8–3.9°
3.5–4.3°
11.4–15.3°
6.3–9.8°
6.7–8.5°
4.2–6.0°
3.4–5.7°
3.7–5.6°
3.7–7.1°
4.2–5.8°
3.2–4.3°
3.0–4.9°
3.2–6.9°
3.0–4.8°
2.4–3.7°
0
2
4
6
8
10
12
14
16
Direction error (°)
Mean error, range over directions
Noise-free mean error, range
Noise-free value below 10^{-6} deg
5° goal