REVISION	DESCRIPTION	DATE	BY
A01	INITIAL RELEASE	16-FEB-26	KATIE C.

NOTES

01 FABRICATION, ASSEMBLY, AND INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH INTERNAL HARNESS STANDARD MSOP012 AND SHALL COMPLY WITH IPC/WHMA-A-620, CLASS 3, AND IPC-A-610, LATEST REVISION.

02 CONTINUITY TESTING SHALL BE PERFORMED IN ACCORDANCE WITH IPC/WHMA-A-620, SECTION 19.5, CLASS 3. HIGH-POT TESTING BE PERFORMED ON THE COMPLETED CABLE ASSEMBLY.

03 DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

04 COVER HARNESS BUNDLE WITH EXPANDABLE SLEEVING, ITEM #07, AND SECURE SLEEVE TO BUNDLE WITH FLEECE TESA TAPE, ITEM #06. LEAVE APPROXIMATELY 5–15 MM OF EXPOSED WIRE FROM CONNECTOR ENDS.

05 FLAG LABELS, ITEM #08, SHALL BE APPLIED IN ACCORDANCE WITH IPC/WHMA-A-620 SECTION 12.7.1 WITHIN 25–75 MM OF THE CONNECTOR HOUSING. REFER TO THE LABEL TABLE FOR LABEL INFORMATION.

06 REFERENCE INSTRUCTION DOCUMENTS IS-37 AND IS-38 FOR HARWIN GECKO CONNECTORS, ITEM #01.

07 POTTING MATERIAL SHALL BE LOCTITE STYCAST 2651MM, ITEM #03. EPOXY INGRESS INTO MATING INTERFACES, CONTACTS, OR LATCH FEATURES SHALL BE PREVENTED.

08 REFER TO "EBOM_10000440-501_A_GB4_TAIL_TO_IOCARRIER" FOR BILL OF MATERIALS.

09 REFER TO "WIRELIST_10000440-501_A_GB4_TAIL_TO_IOCARRIER" FOR WIRING LIST.

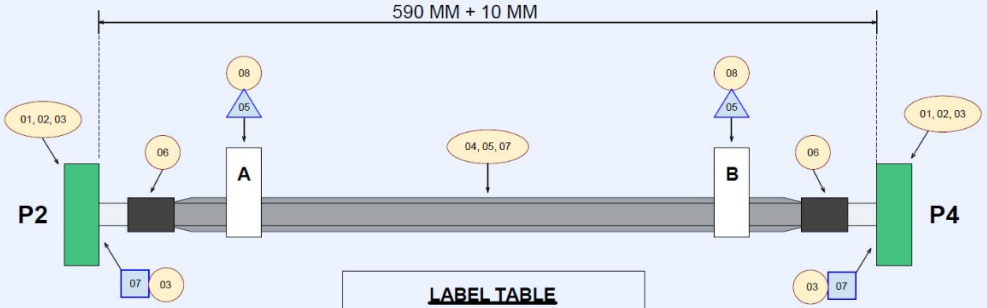

LABEL TABLE

A.	P2 (TO TAIL J2) GLI-B4-A01 10000440-501
B.	P4 (TO I/O J4) GLI-B4-A01 10000440-501

APPROVALS	DATE
EE: MATTHEW S.	DD-MMM-YY
ME: BLAISE B.	DD-MMM-YY
TECH: ANDREW B.	DD-MMM-YY
REFERENCE DOCUMENTS	
PCB: MI-10025699 REV. A	
PCB: MI-100XXXXX REV. A	
OTHER: N/A	

Title: HARNESS, GLIDE B4, TAIL TO I/O CARRIER

Size	Number	Revision
B	10000440-501	A

Date: 2/17/2026 Sheet 1 of 2

File: G:\Shared drives\...\HARNESS_10000440-501_A_GB4_TAIL_TO_IOCARRIER.Ldr

PIN1 TRIANGLE INDENT



INSERT (REAR) VIEW

CRIMP CONTACT:	G125-1010005
CRIMPER:	Z125-900
POSITIONER:	Z125-901
INSERT/REMOVER:	Z125-902
STRIP LENGTH:	2.0MM
WIRE GAUGE:	26

P2

TO TAIL (J2)

P4

TO I/O CARRIER (J4)

P2							P4
1	RS422_STR_RX_N	26 TP	1	WHT	TP1	RS422_STR_RX_N	1
2	RS422_STR_RX_P	26 TP	2	WHT	TP1	RS422_STR_RX_P	2
3	GND	26 AWG	3	WHT		GND	3
4	GND	26 AWG	4	WHT		GND	4
5	ETH_STR_TRDA_N	26 TP	5	WHT	TP2	ETH_STR_TRDA_N	5
6	ETH_STR_TRDA_P	26 TP	6	WHT	TP2	ETH_STR_TRDA_P	6
7	ETH_STR_TRDB_P	26 TP	7	WHT	TP3	ETH_STR_TRDB_P	7
8	ETH_STR_TRDB_N	26 TP	8	WHT	TP3	ETH_STR_TRDB_N	8
9	GND	26 AWG	9	WHT		GND	9
10	NICHROME_EN	26 AWG	10	WHT		NICHROME_EN	10
11	GND	26 AWG	11	WHT		GND	11
12	MUN_OUT	26 TP	12	WHT	TP4	MUN_OUT	12
13	MUN_IN	26 TP	13	WHT	TP4	MUN_IN	13
14	RS422_STR_TX_P	26 TP	14	WHT	TP5	RS422_STR_TX_P	14
15	RS422_STR_TX_N	26 TP	15	WHT	TP5	RS422_STR_TX_N	15
16	UMB_PWR	26 AWG	16	WHT		UMB_PWR	16
17	UMB_PWR	26 AWG	17	WHT		UMB_PWR	17
18	UMB_GND	26 AWG	18	WHT		UMB_GND	18
19	UMB_GND	26 AWG	19	WHT		UMB_GND	19
20	CAN_L	26 TP	20	WHT	TP6	CAN_L	20
21	CAN_H	26 TP	21	WHT	TP6	CAN_H	21
22	HEATER_EN	26 AWG	22	WHT		HEATER_EN	22
23	GND	26 AWG	23	WHT		GND	23
24	GND	26 AWG	24	WHT		GND	24
25	VBAT	26 AWG	25	WHT		VBAT	25
26	VBAT	26 AWG	26	WHT		VBAT	26

PIN1 TRIANGLE INDENT



INSERT (REAR) VIEW

CRIMP CONTACT:	G125-1010005
CRIMPER:	Z125-900
POSITIONER:	Z125-901
INSERT/REMOVER:	Z125-902
STRIP LENGTH:	2.0MM
WIRE GAUGE:	26

Title	HARNESS, GLIDE B4, TAIL TO I/O CARRIER	
Size B	Number 10000440-501	Revision A
Date: 2/17/2026	Sheet2 of 2	
File: G:\Shared drives\...\HARNESS_10000440-501_GLIDE_B4_TAIL_TO_IOCARRIER.WinDoc	Drawn By:	