REVISION	DESCRIPTION	DATE	BY
A01	HARNESS TEMPLATE	10-FEB-26	KATIE C.

NOTES

01 FABRICATION, ASSEMBLY, AND INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH INTERNAL HARNESS STANDARD MSOP012 AND SHALL COMPLY WITH IPC/WHMA-A-620, CLASS 3, AND IPC-A-610, LATEST REVISION.

02 CONTINUITY TESTING SHALL BE PERFORMED IN ACCORDANCE WITH IPC/WHMA-A-620, SECTION 19.5, CLASS 3. HIGH-POT TESTING BE PERFORMED ON THE COMPLETED CABLE ASSEMBLY.

03 DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

04 COVER HARNESS BUNDLE WITH EXPANDABLE SLEEVING, ITEM #__, AND SECURE SLEEVE TO BUNDLE WITH FLEECE TESA TAPE, ITEM #__. LEAVE APPROXIMATELY 5–15 MM OF EXPOSED WIRE FROM CONNECTOR ENDS.

05 FLAG LABELS, ITEM #__, SHALL BE APPLIED IN ACCORDANCE WITH IPC/WHMA-A-620 SECTION 12.7.1 WITHIN 25–75 MM OF THE CONNECTOR HOUSING. REFER TO THE LABEL TABLE FOR LABEL INFORMATION.

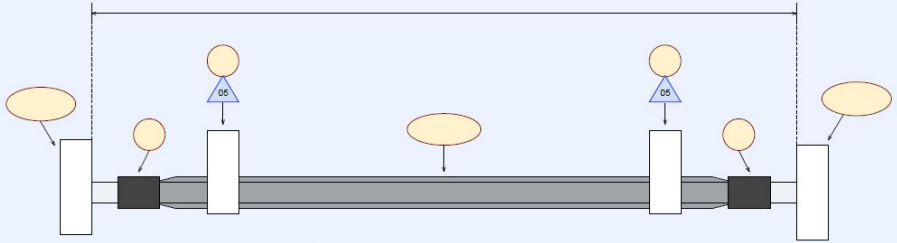

LABEL TABLE

APPROVALS	DATE
EE:	
ME:	
TECH:	
REFERENCE DOCUMENTS	
PCB/FAB:	

Title

Size	Number	Revision
B		

Date: 2/10/2026 Sheet 1 of 1

File: G:\Shared drives\...\HARNESS_TEMPLATE_A01.SchDoc Drawn By: LDR Lab

Crimp Contact:
Tool Hand Crimper:
Crimp Contact Positioner:
Crimp Ins/Remov Kit:
Strip Length:
Gauge Wire:

Crimp Contact:
Tool Hand Crimper:
Crimp Contact Positioner:
Crimp Ins/Remov Kit:
Strip Length:
Gauge Wire:

Title		
Size B	Number	Revision
Date: 2/10/2026	Sheet 1 of 2	
File: G:\Shared drives\...\HARNESS_TEMPLATE_Assembly.WIR.WinDoc		