

Test Summary & Health Assessment

① Overall Test Information

PARAMETER	VALUE
Export Date	2026-07-19
Export Time	05:22:19 PM
Total Test Duration	3s
Total Samples Recorded	35
Average Sampling Rate	10.29 Hz
Firmware Version	v1.1.2
COM Port	COM4
System Status	System Online
Software Version	v1.1.2
Report Version	2.0
Test Status	COMPLETED

② Performance Health Indicators


PARAMETER	MEASURED VALUES	STATUS
Speed (RPM) Avg 1685.6 RPM Max 1800.0 RPM		NORMAL
Voltage Avg 12.14 V Range 0.57 V		NORMAL
Current Avg 1.16 A Max 1.43 A		NORMAL
Power Avg 14.14 W Max 17.42 W		WARNING
Temperature Avg 50.3 °C Max 64.4 °C		CAUTION
Efficiency Avg 83.6 % Min 78.2 %		NORMAL

Performance Analysis Report

① Speed (RPM) – Performance Analysis

PARAMETER	VALUE
Maximum Speed	1800.0 rpm
Minimum Speed	1560.0 rpm
Average Speed	1685.6 rpm
Speed Range	240.0 rpm
Standard Deviation	78.89 rpm
Initial Speed	1757.0 rpm
Final Speed	1668.0 rpm
Total Samples	35
Test Duration	3s

Speed (RPM) vs Time

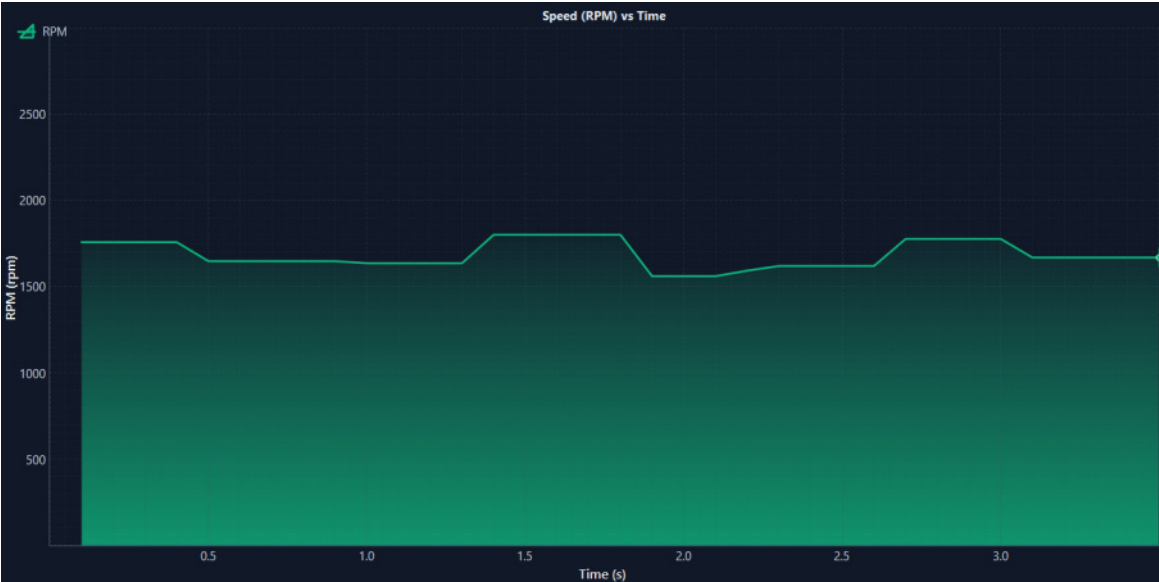


Performance Analysis Report

② Voltage – Performance Analysis

PARAMETER	VALUE
Maximum Voltage	12.40 V
Minimum Voltage	11.83 V
Average Voltage	12.14 V
Voltage Range	0.57 V
Standard Deviation	0.18 V
Initial Voltage	11.85 V
Final Voltage	12.40 V
Total Samples	35
Test Duration	3s

Voltage vs Time

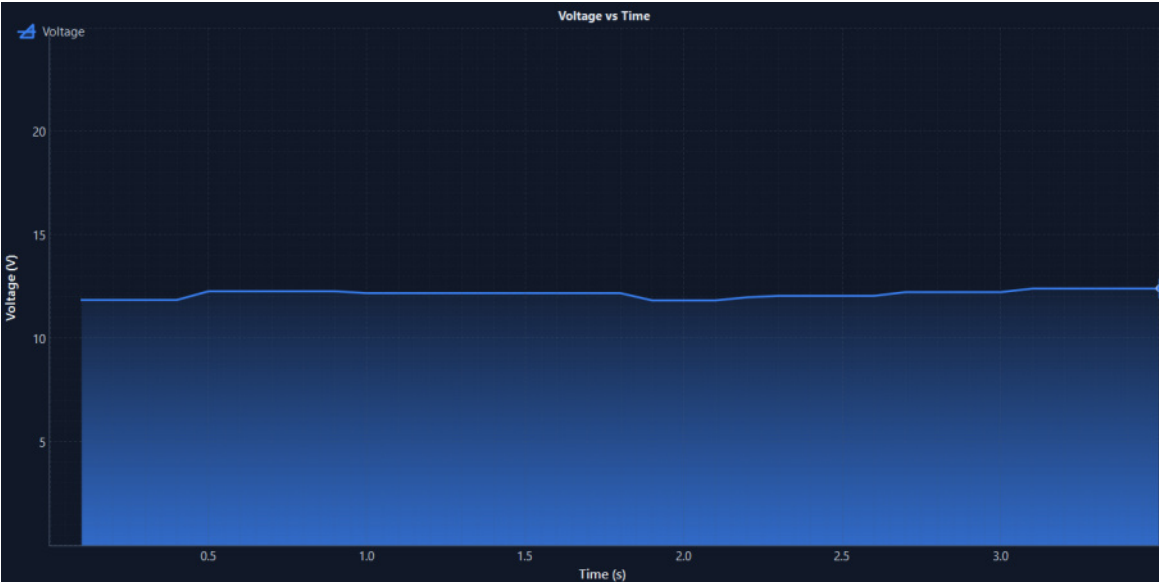


Performance Analysis Report

③ Current – Performance Analysis

PARAMETER	VALUE
Maximum Current	1.43 A
Minimum Current	0.80 A
Average Current	1.16 A
Current Range	0.63 A
Standard Deviation	0.24 A
Initial Current	1.26 A
Final Current	0.97 A
Total Samples	35
Test Duration	3s

Current vs Time

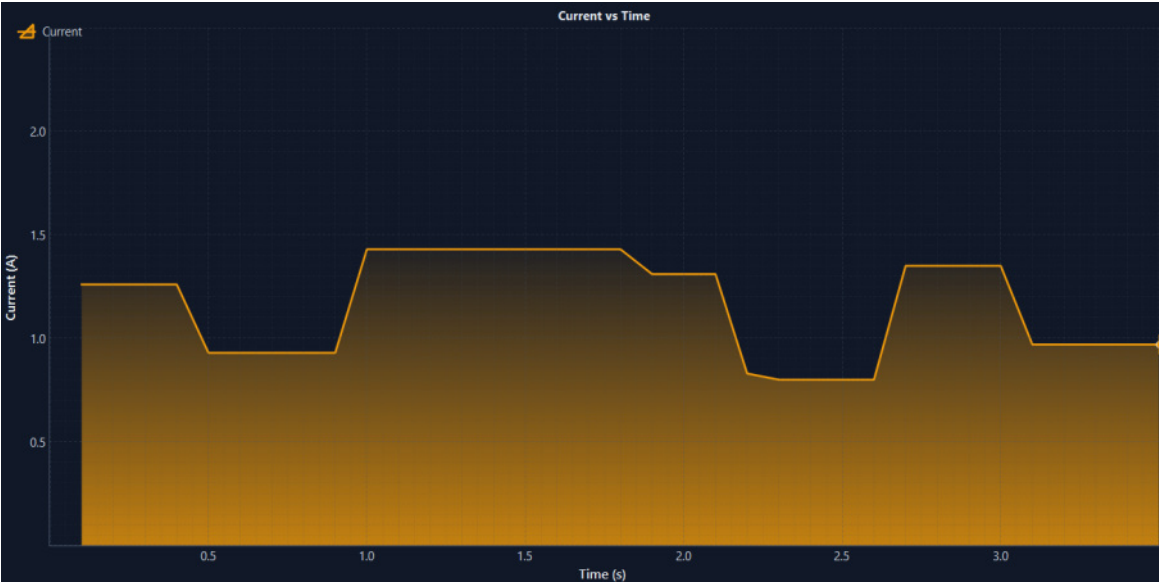


Performance Analysis Report

④ Power – Performance Analysis

PARAMETER	VALUE
Maximum Power	17.42 W
Minimum Power	9.64 W
Average Power	14.14 W
Power Range	7.78 W
Standard Deviation	2.90 W
Initial Power	14.93 W
Final Power	12.03 W
Total Samples	35
Test Duration	3s

Power vs Time

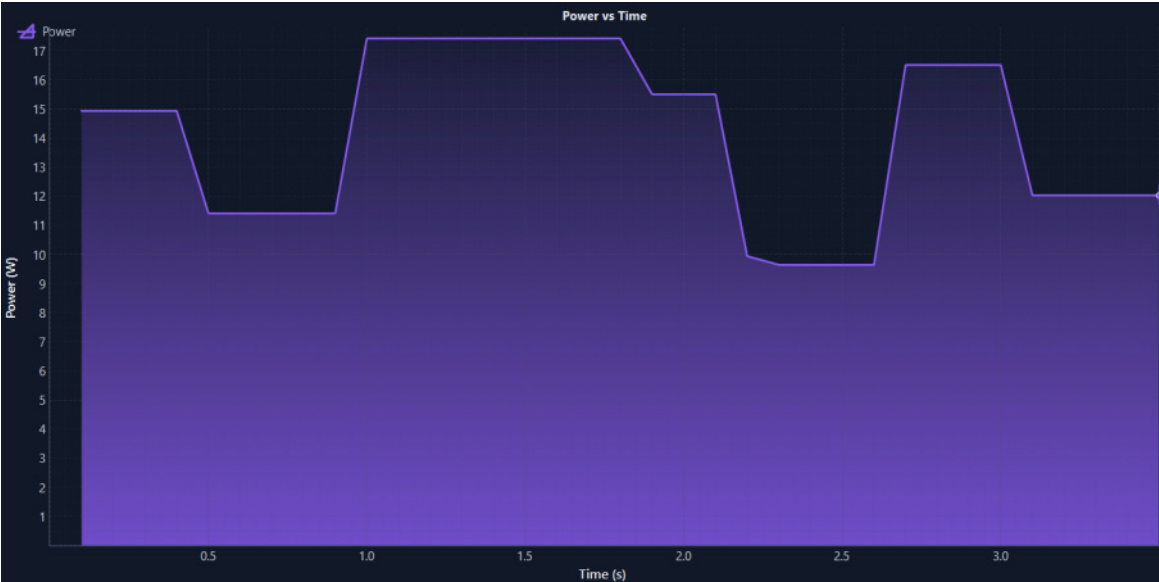


Performance Analysis Report

⑤ Temperature – Performance Analysis

PARAMETER	VALUE
Maximum Temperature	64.4 °C
Minimum Temperature	40.5 °C
Average Temperature	50.3 °C
Temperature Range	23.9 °C
Standard Deviation	7.94 °C
Initial Temperature	45.6 °C
Final Temperature	48.1 °C
Total Samples	35
Test Duration	3s

Temperature vs Time

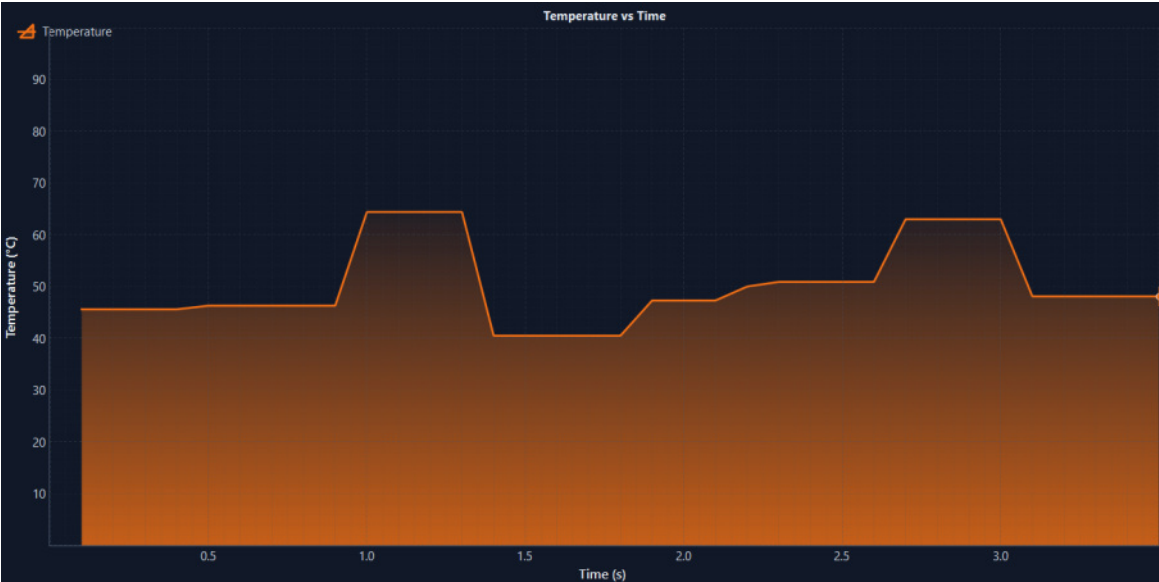

Performance Analysis Report

⑥ Efficiency – Performance Analysis

PARAMETER	VALUE
Maximum Efficiency	89.1 %
Minimum Efficiency	78.2 %
Average Efficiency	83.6 %
Efficiency Range	10.9 %
Standard Deviation	3.88 %
Initial Efficiency	82.0 %
Final Efficiency	89.1 %
Total Samples	35
Test Duration	3s

Efficiency vs Time

