

YOUR CURRENT VEHICLE


2018 Chrysler Pacifica

Removal And Installation

REMOVAL AND INSTALLATION

REMOVAL


1. Disconnect and isolate the battery negative cable.
2. Remove the left D-pillar. ([Refer to Body/Interior/PANEL, D-Pillar Trim/Removal and Installation](#)).

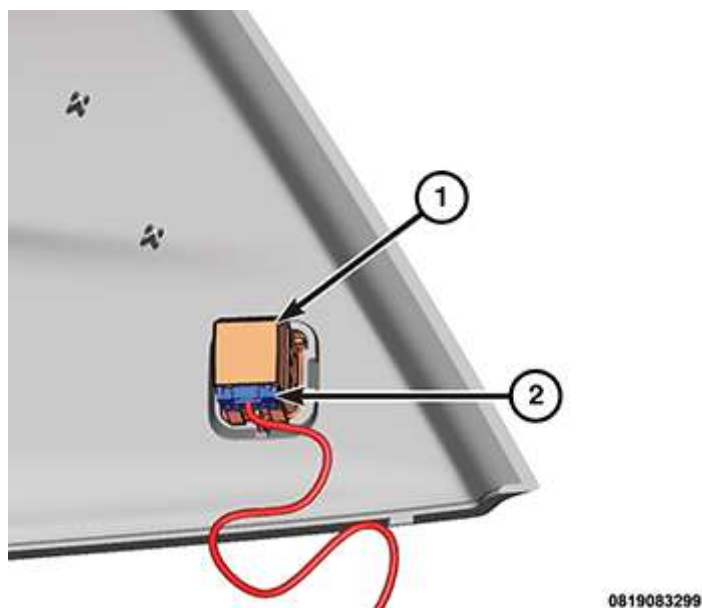

3. Disconnect the electrical connector (2) from the switch (1).

4. Using a trim stick


Trim Stick

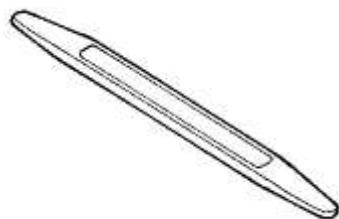

or equivalent, carefully depress the switch retaining tabs to separate the power liftgate switch from the D-Pillar.

INSTALLATION

1. Seat the liftgate switch into the D-pillar until all of the switch retaining clips are engaged.

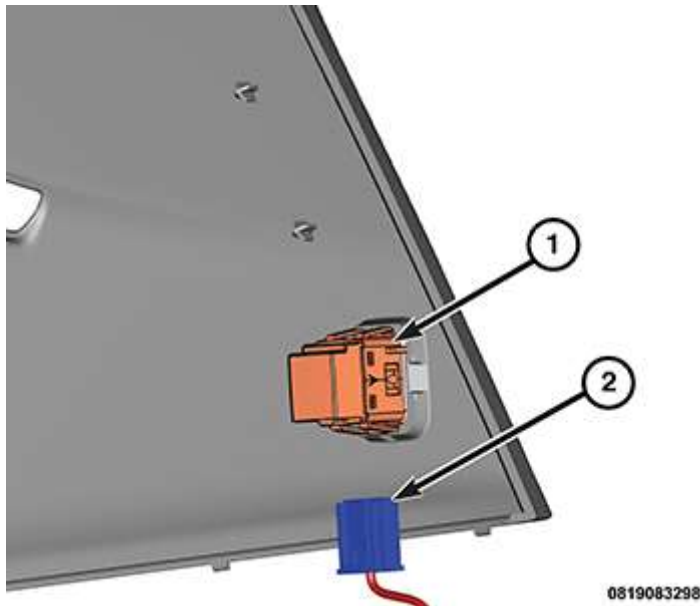

2. Connect the wiring harness connector (2) to the liftgate switch (1).
3. Install the left D-pillar. ([Refer to 23 - Body/Interior/PANEL, D-Pillar Trim/Removal and Installation](#)).
4. Connect the negative battery cable.