
# **CHILTON**LIBRARY



## **Removal & Installation**


### **REMOVAL AND INSTALLATION**

### **REMOVAL**

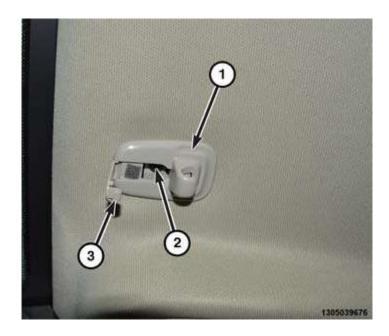

- 1. Using a small pry tool, open the screw cover (3).
- 2. Remove the screw (2) and the visor support (1).

### **INSTALLATION**

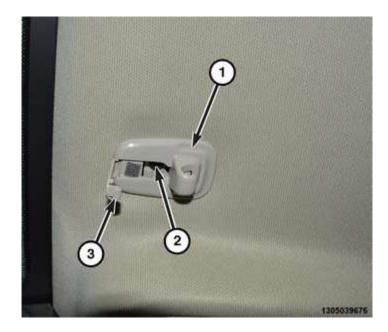

- 1. Position the visor support (1) onto the headliner and install the screw (2). Tighten the screw securely.
- 2. Close the screw cover (3).