
# **CHILTON**LIBRARY



## **Removal & Installation**


#### **REMOVAL AND INSTALLATION**

#### **REMOVAL**

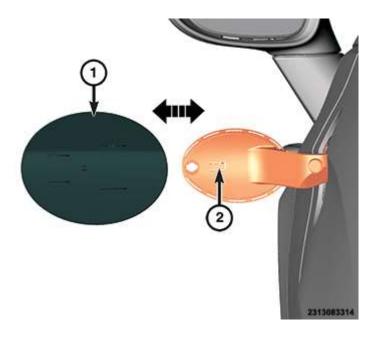

- 1. Open the fuel filler door (1).
- 2. Using a flat bladed tool, lift the retaining tab (2) and slide the fuel door (1) outward.
- 3. Remove the fuel filler door from the vehicle.

### **INSTALLATION**

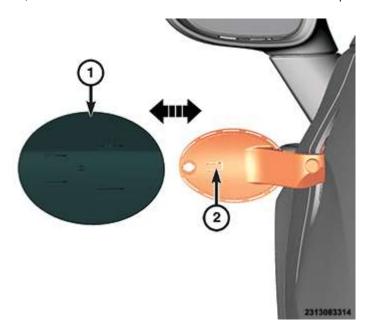

- 1. Align the fuel filler door (1) to the housing .
- 2. Slide the fuel fill door (1) inward until the retaining tab (2) locks into place. A loud audible snap is normal.