

YOUR CURRENT VEHICLE

2018 Chrysler Pacifica


Removal & Installation

REMOVAL AND INSTALLATION

REMOVAL

WARNING


Disable the airbag system before attempting any front seat diagnosis or service. Disconnect and isolate the negative battery (ground) cable and wait two minutes for the airbag system capacitor to discharge before performing further diagnosis or service. This is the only sure way to disable the airbag system. Failure to follow these instructions may result in accidental airbag deployment and possible serious or fatal injury.

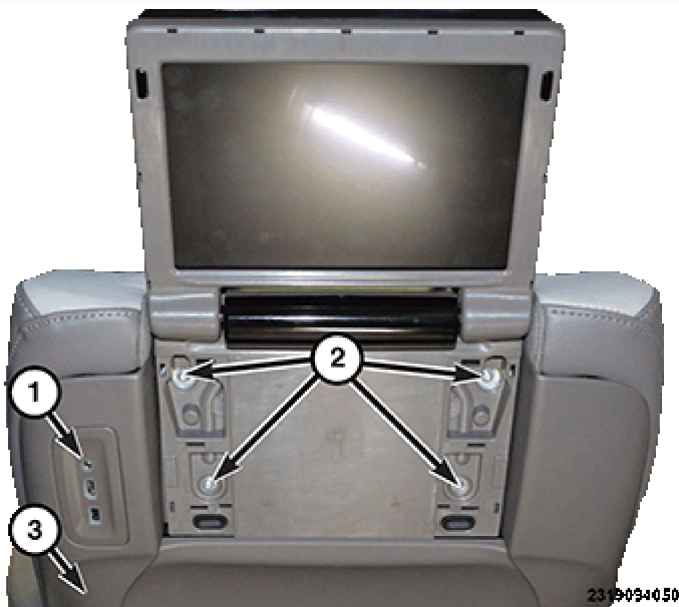

1. Before proceeding with the following repair procedure, review all warnings and cautions ([Refer to Body/Seats - Warning](#)).
2. Position the seat fully forward.
3. Using a small flat bladed tool, remove the screw covers and the four screws (2).

4. Starting at one side of the seat back panel (3), use a trim stick or equivalent to release the retaining tabs and pull rearward to loosen the seat back panel.
5. Disconnect the wire harness connector from the media hub (1) and the video monitor if equipped, then remove the seat back panel.

INSTALLATION

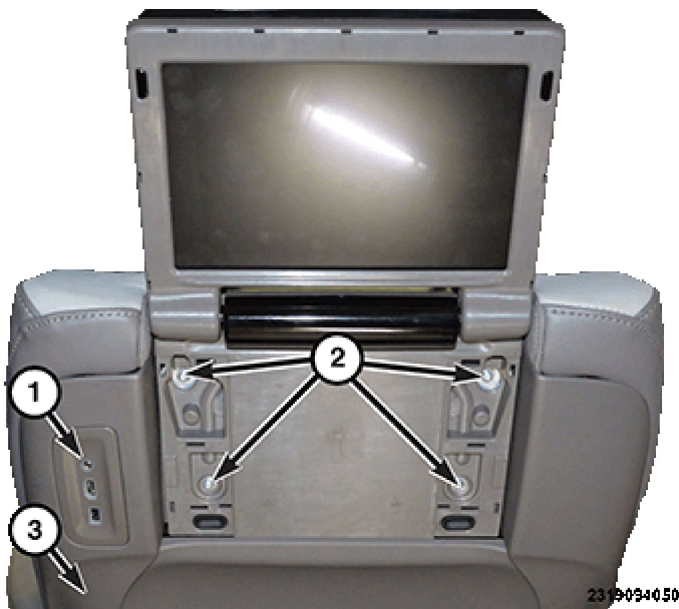

1. Connect the wire harness connector to the media hub (1) and video monitor if equipped, then install the seat back panel (3).
2. Install the four screws (2) and tighten securely.
3. Install the screw covers.