
CHILTONLIBRARY




Removal & Installation

REMOVAL AND INSTALLATION

REMOVAL



- 1. Remove the tail lamp assembly (Refer to Electrical/Lamps/Lighting Exterior/LAMP, Tail/Removal and Installation).
- 2. Remove the two fasteners (1) securing the D-pillar applique to the vehicle.

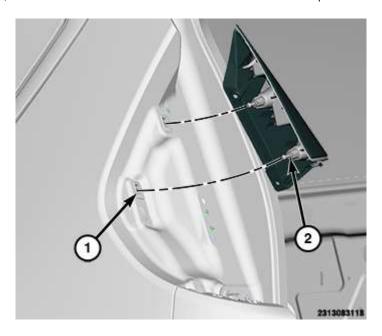


3. Using a trim stick






or equivalent, release the D-pillar applique mounting pins (2).

INSTALLATION

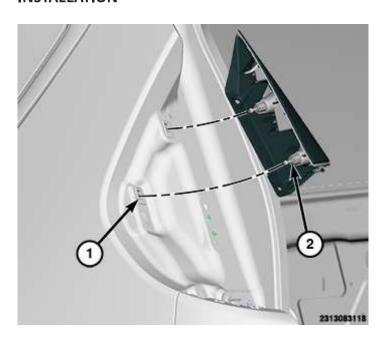

1. Position the D-Pillar applique onto the vehicle and seat the mounting pins (2) into the grommets (1) fully.



- 2. Install the two D-pillar applique fasteners (1) and tighten them securely.
- 3. Install the tail lamp assembly (Refer to 08 Electrical/Lamps/Lighting Exterior/LAMP, Tail/Removal and Installation).