

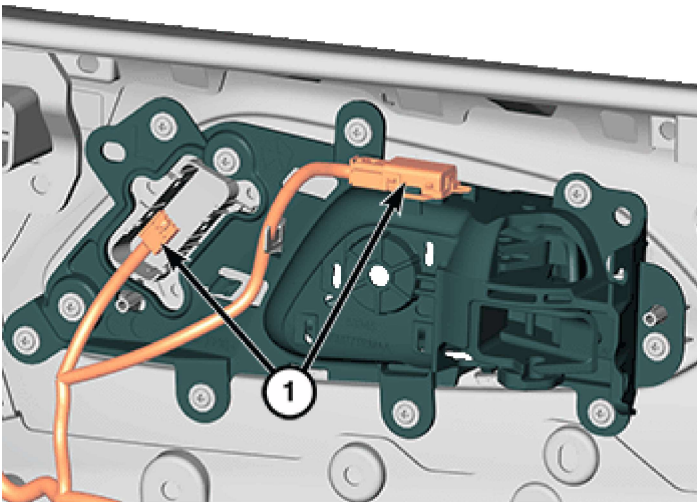
YOUR CURRENT VEHICLE

2018 Chrysler Pacifica

Removal & Installation

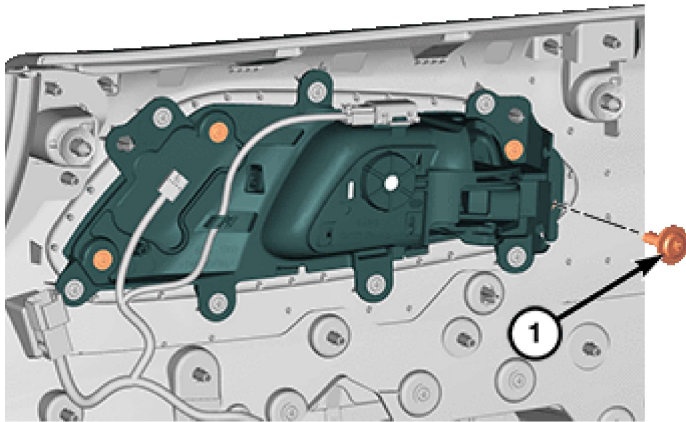
REMOVAL AND INSTALLATION

REMOVAL

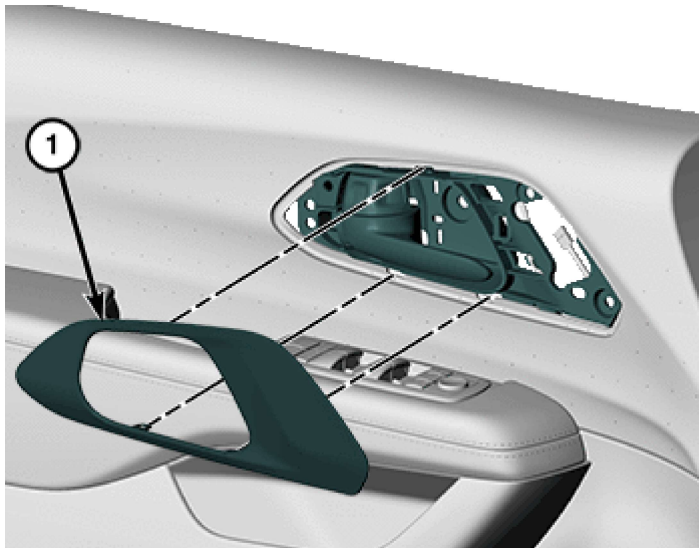


231000093B

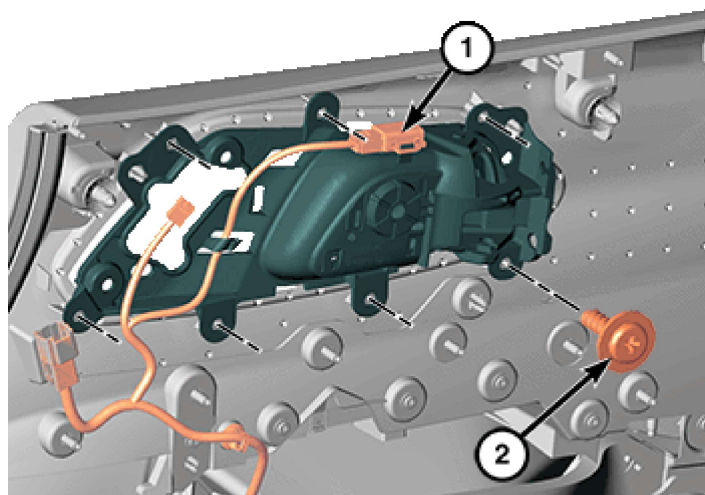
1. Remove the front door trim panel ([Refer to 23 - Body/Door - Front/PANEL, Door Trim/Removal and Installation](#)).
2. Disconnect the wire harness connectors (1) as necessary.

**2310100009**

3. Remove the four bezel screws (1).

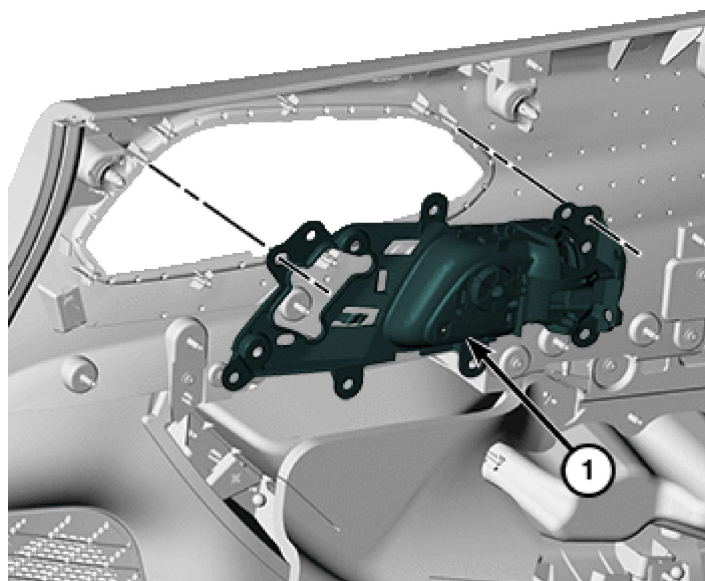
**2310100012**

4. Using trim stick C-4755 or equivalent, remove the interior handle bezel (1).

**2310100010**

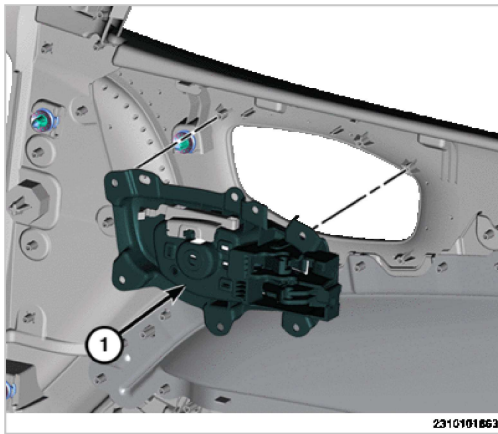
5. Separate the wire harness (1) from the handle.

6. Remove the seven screws (2).

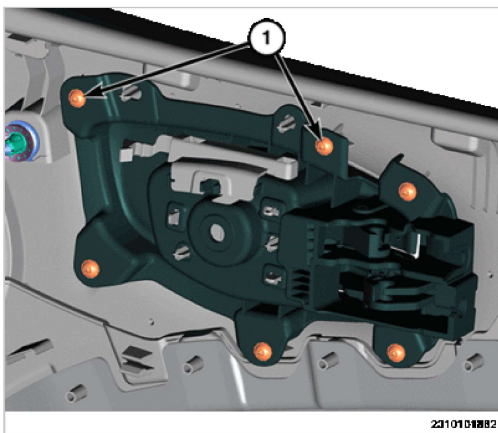
**2310100011**

7. Remove the interior handle (1) from the door trim panel.

INSTALLATION



1. Install the interior handle (1) onto the door trim panel.



2. Install the six screws (2) and tighten to the proper [\(Torque Specifications\)](#).
3. Install the front door trim panel [\(Refer to 23 - Body/Door - Front/PANEL, Door Trim/Removal and Installation\)](#).