

YPKG Kalgoorlie Boulder

Airport

- NIL

Nav aids

- NIL

Runway

- NIL

SID

- NIL

STAR

- NIL

Procedures

- NIL

Minima

- NIL

Others

- NIL

1 GENERAL**1.1 Operational Hours****1.1.1 ATS Hours**

Uncontrolled AD, CTAF

1.1.2 AD OPS Hours

Not published

1.2 Airport Information**1.2.1 RFF**

Not published

1.2.2 Fuel

Jet A-1, 2300-1100, other times 30min PN

1.2.3 PCR

RWY 11/29: 400/F/A/X/T

RWY 18/36: 80/F/A/1.00 MPa/T

1.2.4 Customs

Not published

1.3 Runway, Taxiway and Apron Restriction**1.3.1 Taxiway Restrictions**

TWY B width 18m / 59ft

Other TWYs width 10.5m / 34ft - not AVBL to ACFT above 5700kg / 12566lbs.

1.3.2 Apron Restrictions

ACFT taxiing from bays 1, 2, 3 and 3A shall use MNM thrust when departing.

1.4 Operation**1.4.1 Traffic Notes**

PAL will activate RWY lights and PAPI HN only. PAL will activate PAPI HJ only.

All non-SKED flights, except diversions, requiring PKNG on the APN require 24HR PN to the AD OPR.

Main terminal open 2200-1100; hours may vary particularly on weekends.

1.4.2 Transponder Operation

For details on Transponder Mode S Operation see CRAR.

1.5 Noise Abatement Procedures (NAP)

Flight over residential areas should be minimised particularly at night.

GND running of turboprop ACFT on the regular passenger transport APN is to be avoided.

1.6 Warnings**1.6.1 Caution Notes**

Hang gliding OPS NE of Kalgoorlie/Boulder at Lake Perkolilli, Kunalpi (S 30 34.4 E121 42.9)

Weather balloon launch APRX 2315 from PSN 950m / 3317ft WNW of ARP. Launches may occur at other times.

Birds in vicinity of AD.

2 ARRIVAL**2.1 Speed**

MAX IAS 200KT at or below 2500ft AAL within 4NM of primary class D AD.

MAX IAS 250KT in remaining class D airspace.

MAX IAS 250KT below 10000ft in airspace classes E and G.

2.2 Communication Failure

See CRAR.

2.3 Noise Abatement Procedures (NAP)

See CRAR.

3 DEPARTURE**3.1 Take-off Minima**

RWY		11/29	
Multi ENG	ft - m/km	0 - 800V	-
other		c300 - 2.0V	-

3.2 Speed

MAX IAS 200KT at or below 2500ft AAL within 4NM of primary class D AD.

MAX IAS 250KT in remaining class D airspace.

MAX IAS 250KT below 10000ft in airspace classes E and G.

3.3 Communication Failure

See CRAR.

3.4 Noise Abatement Procedures (NAP)

See CRAR.


KGI-YPKG

AGC
AFC

AFC

AFC

AGC
AFC

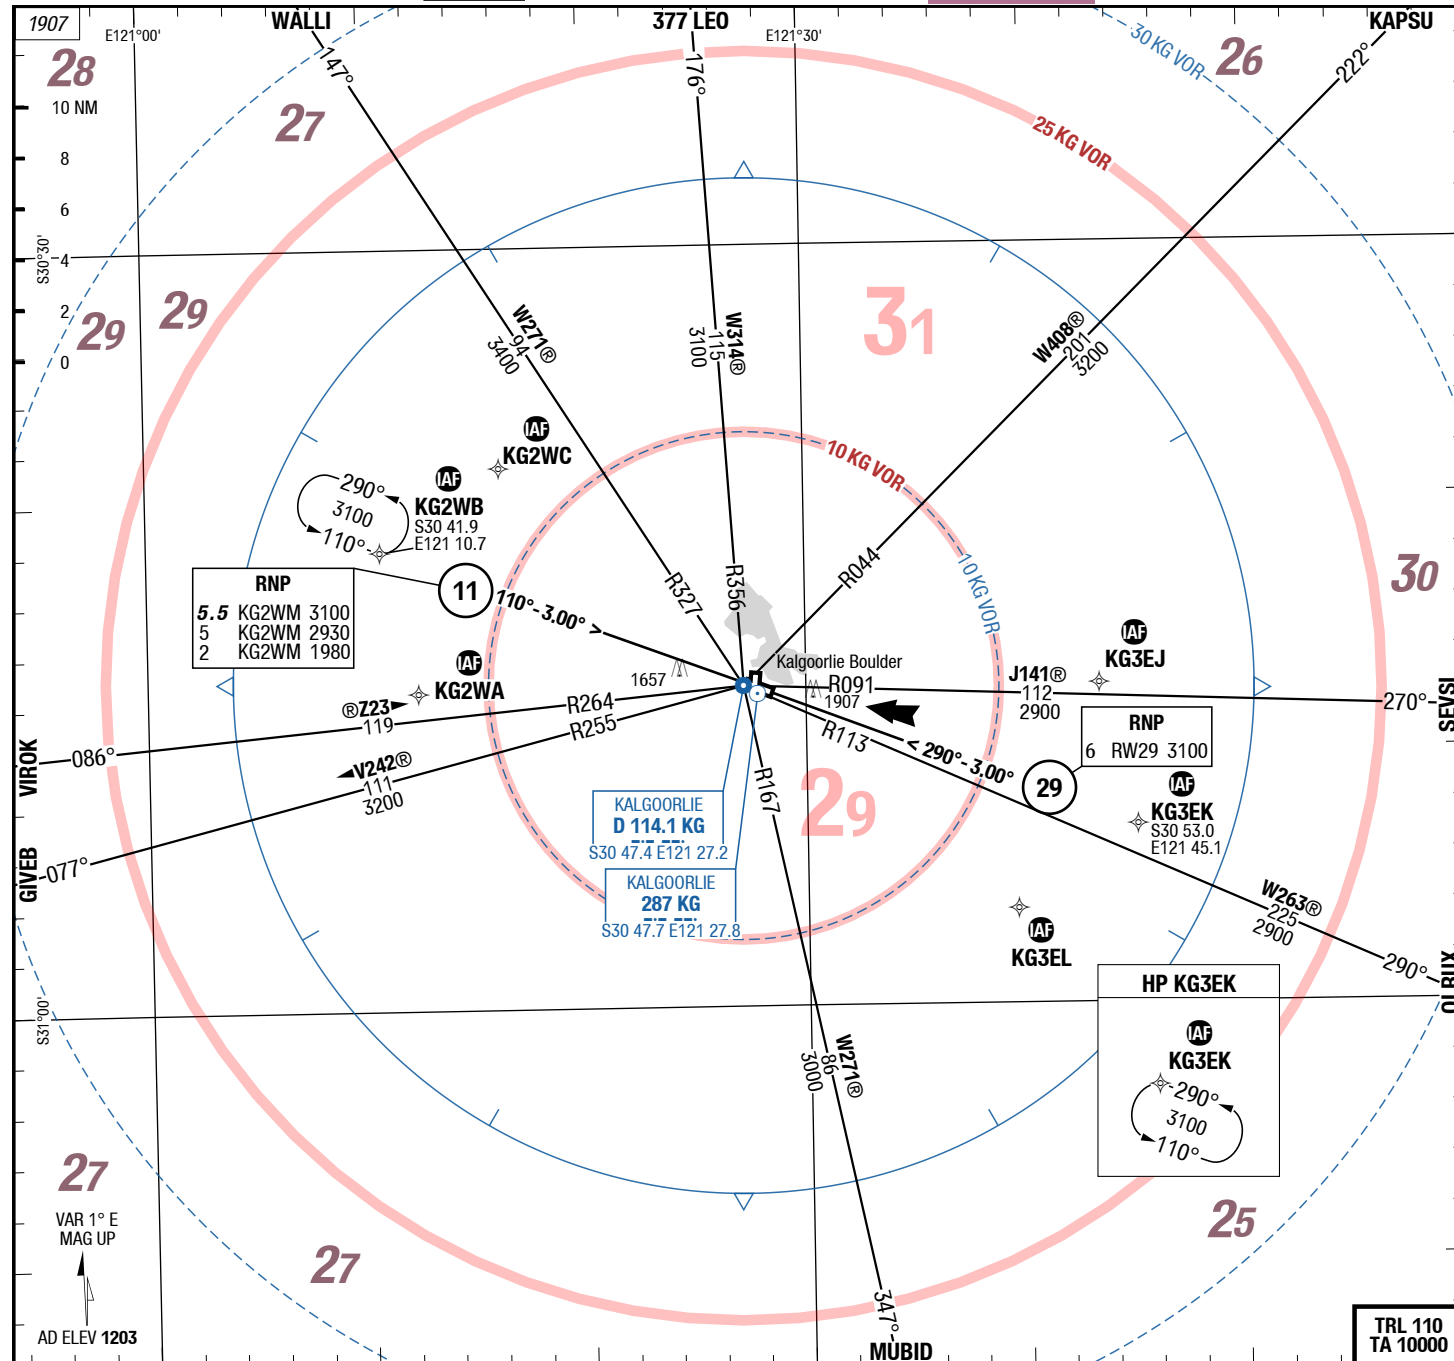

11

83.0°
2000 x 45

THR 1203 (43hPa) / TDZ --- (---%) -0.9%

60 L
45 x 2000
3.0°
+0.9% TDZ --- (---%) / THR 1147 (41hPa)

✓ **AirAsia (AirAsia)**

13-MAR-2025
KGI-YPKG

Australia Kalgoorlie Boulder

AGC


AGC

AGC

Kalgoorlie Boulder Australia


AGC

3-20

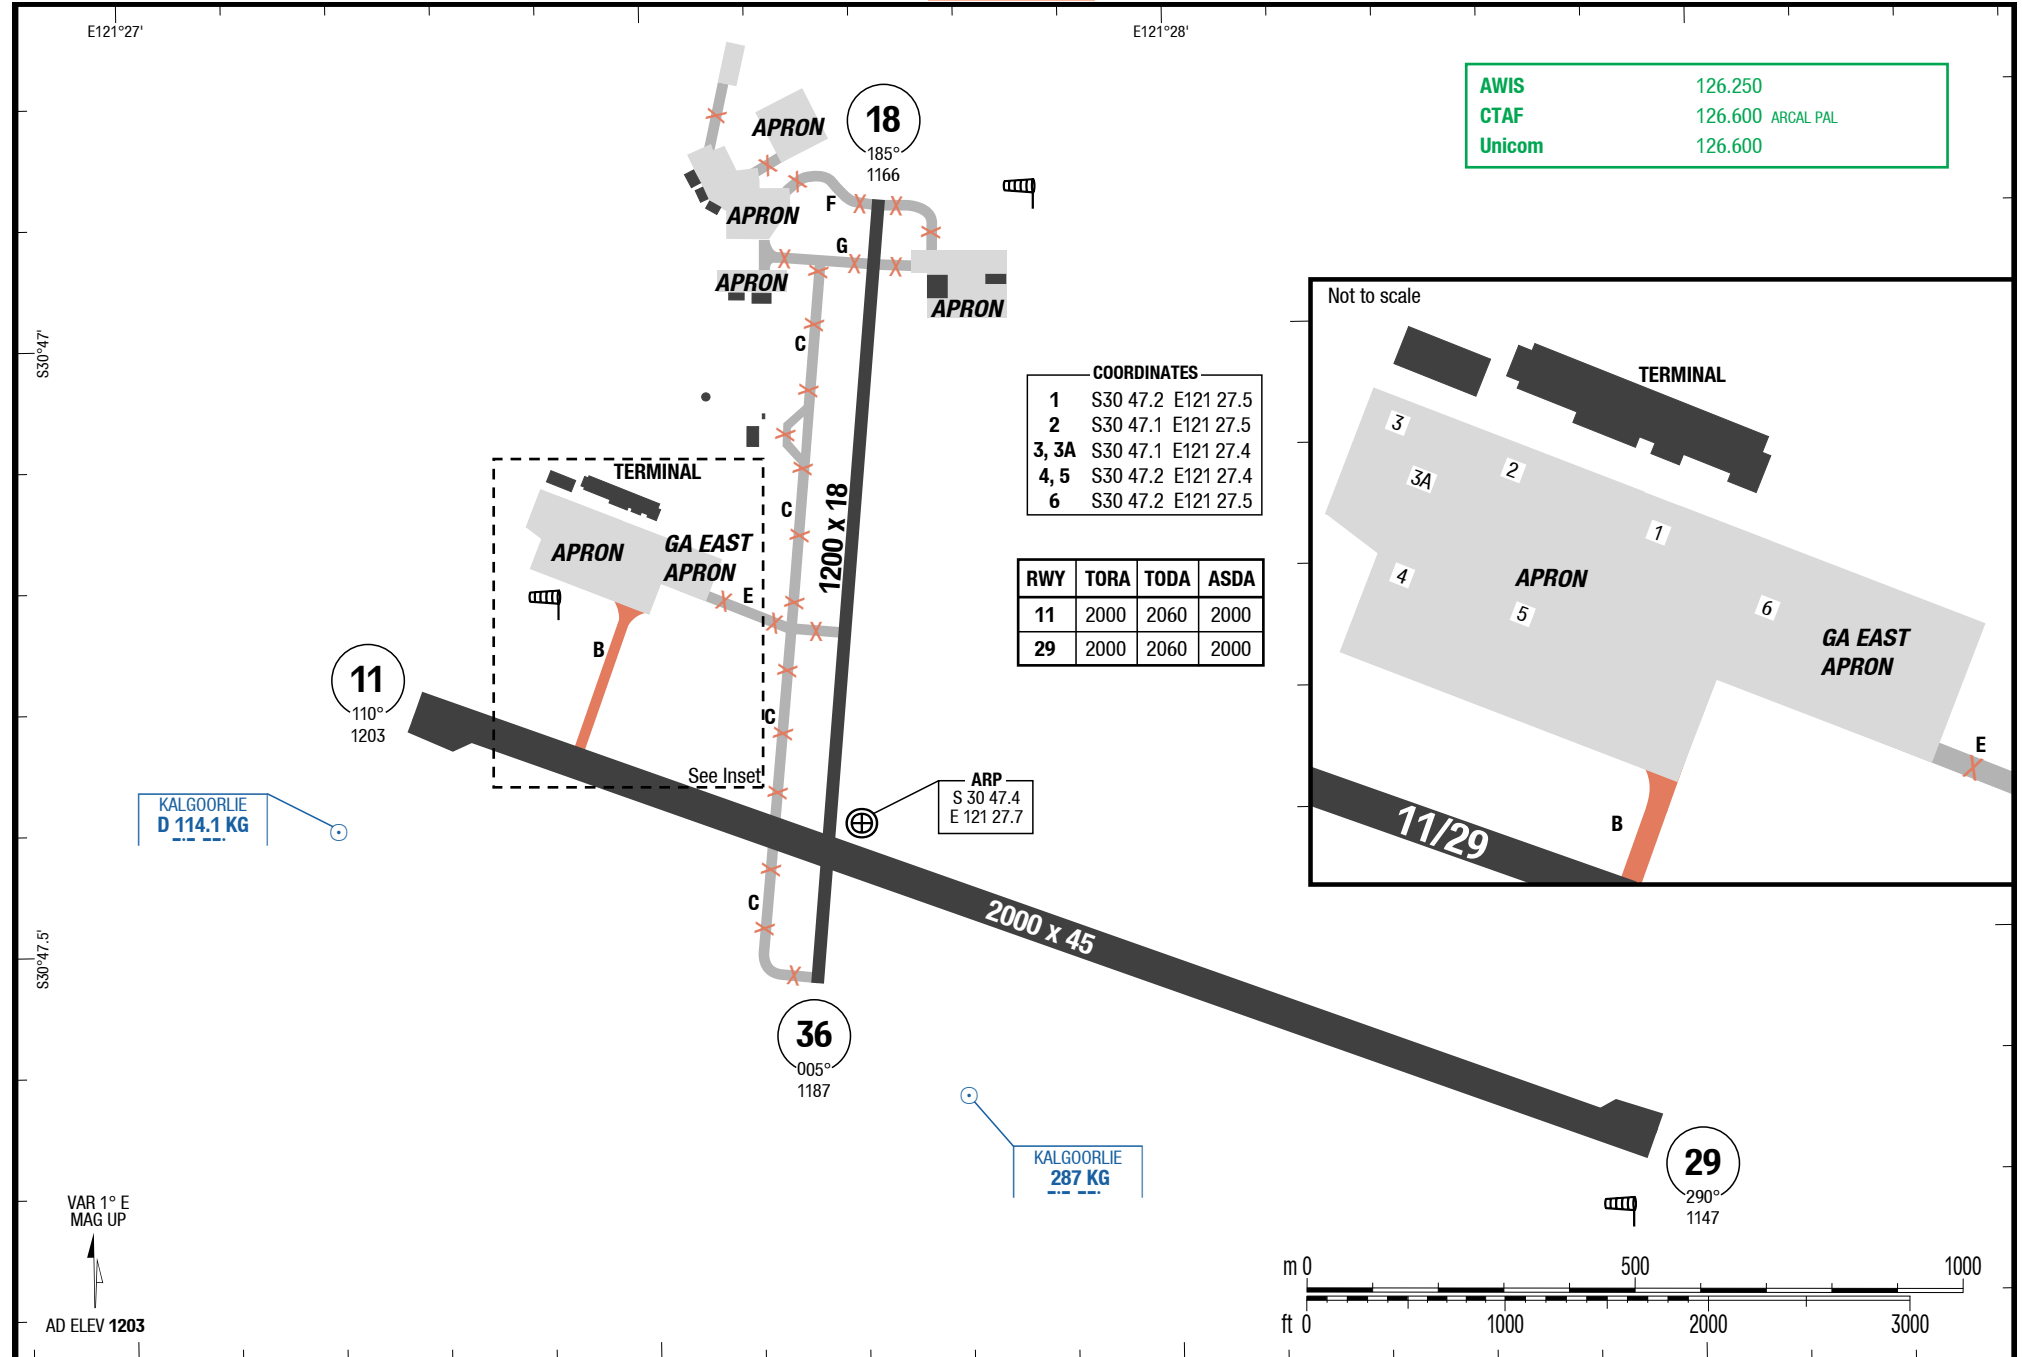


Changes: Nil

7-10

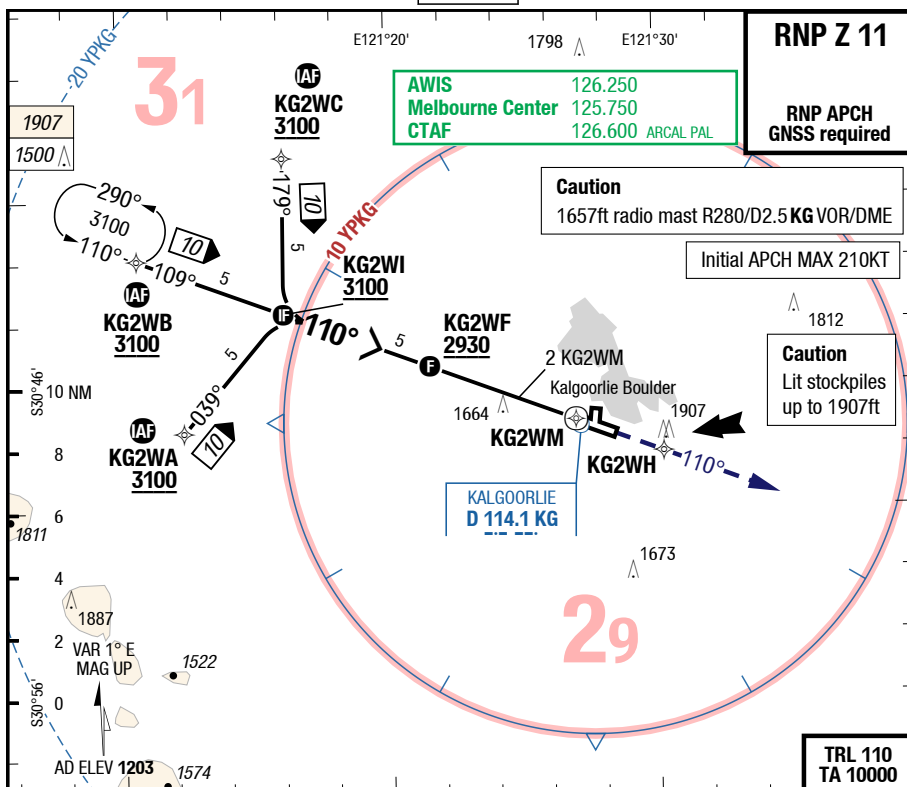RNP Z 11

3.00°			5.5	4	3	1	11	83.0°	60 L
KG2WM			3100	2620	2300	1660		2000 x 45	
								THR 1203 (43hPa) / IDZ --- (---%)	-0.9%

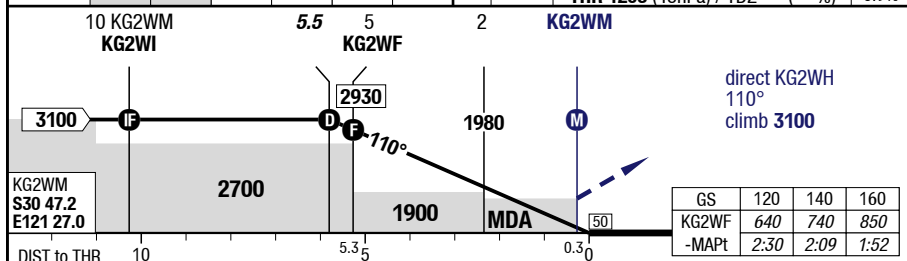

11		LNAV/VNAV 1) 2) 3)	LNAV 4)			Circling 4) 5)
C	ft - m/km ft	390 - 2.2V 1590	580 - 3.3V 1780			980 - 4.0V 2180
D	ft - m/km ft	390 - 2.2V 1590	580 - 3.3V 1780			1000 - 5.0V 2200

1) Uncompensated BARO VNAV NA below -5°C or above 58°C 2) SBAS use for VNAV not applicable or not authorized 3) Use with Kalgoorlie-Boulder (YPKG) QNH only 4) Minima may be reduced by 100ft with actual QNH 5) BTW RWY 29 and RWY 18 only

Changes: OBST, Note

Effective 12-JUN-2025

05-JUN-2025


KGI-YPKG

Australia Kalgoorlie Boulder


IAC

7-20

RNP Z 29

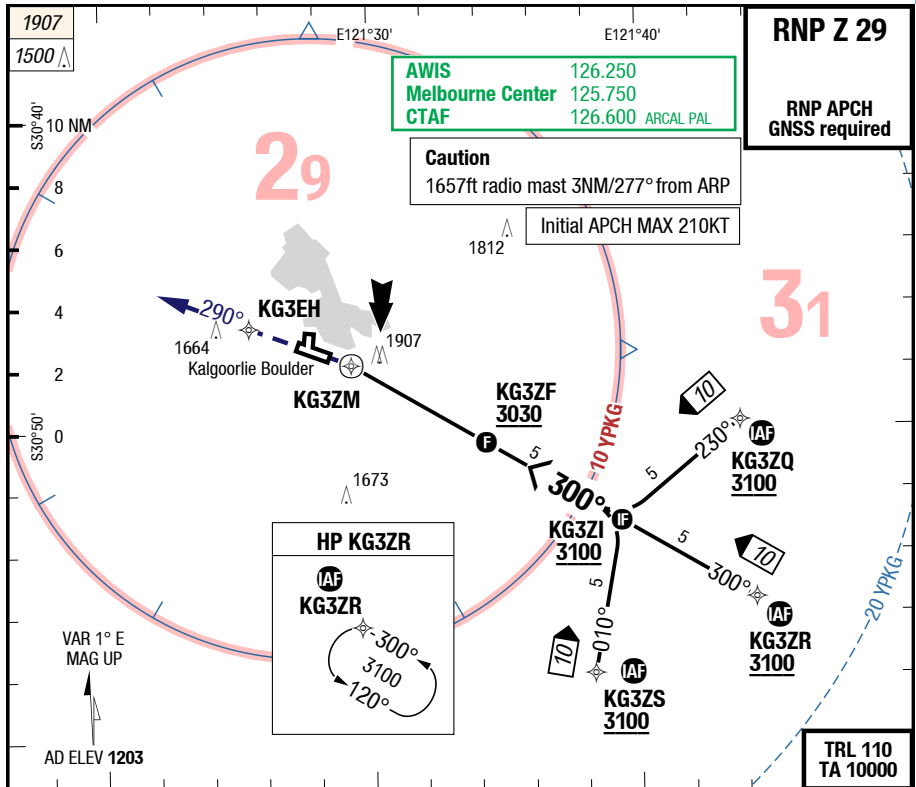

60 L	45 x 2000	2	3	4	5.2	3.00°
3.0°		2080	2400	2720	3100	KG3ZM
+0.9%	TDZ --- (---%) / THR 1147 (41hPa)					Offset 10° RWY 290°

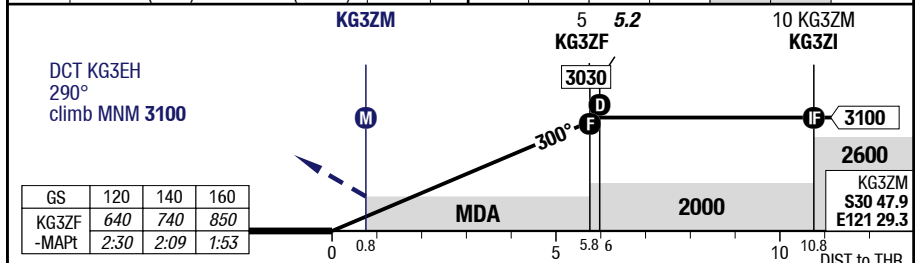


29	LNAV					Circling
	1)					1) 2)
C	ft - m/km ft	640 - 3.6V 1780				980 - 4.0V 2180
D	ft - m/km ft	640 - 3.6V 1780				1000 - 5.0V 2200

1) Minima may be reduced by 100ft with actual QNH
 2) BTW RWY 29 and RWY 18 only

Changes: OBST

✓ AirAsia (AirAsia)

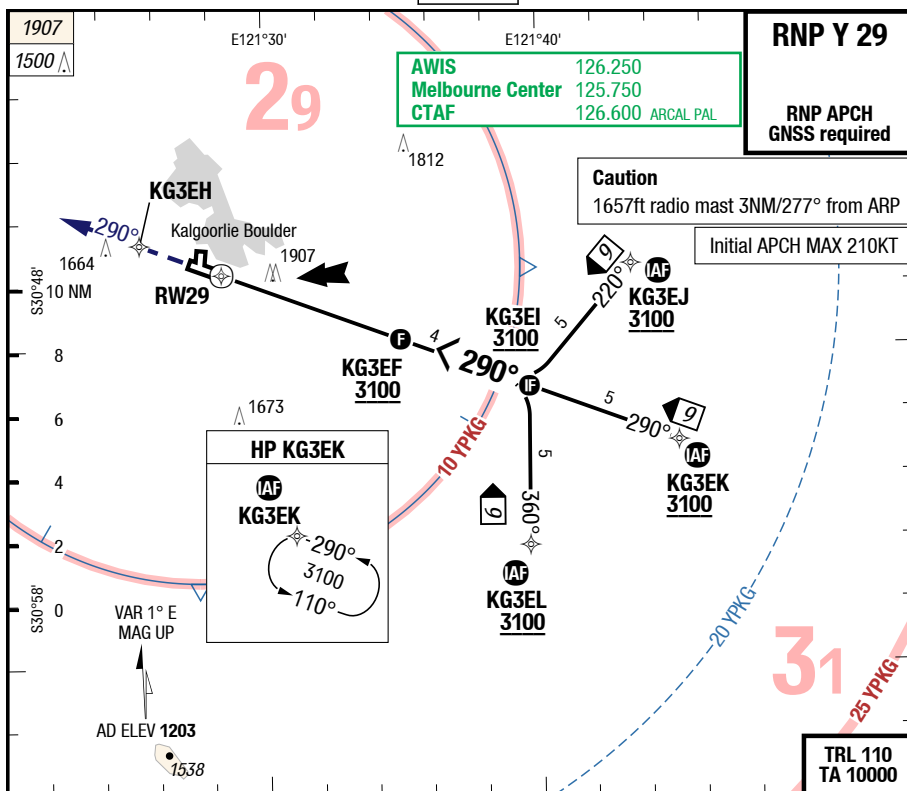

60 L 45 x 2000 3.0° 29 1 2 3 4 5 6 3.00° RW29

+0.9% TDZ --- (---%) / THR 1147 (41hPa)

direct KG3EH 290° climb MNM 3100

RW29 6 KG3EF 10.3 RW29 KG3EI

3100 3100 2600

GS 120 140 160 640 740 850

0 5 6 10 10.3 DIST TO THR

DA 2100

29 LNAV/VNAV 1) 2) 3) Circling 4) 5)

C ft - m/km ft 280 - 1.5V 1420 980 - 4.0V 2180

D ft - m/km ft 280 - 1.5V 1420 1000 - 5.0V 2200

1) Uncompensated BARO VNAV NA below -5°C or above 58°C 2) SBAS use for VNAV not applicable or not authorized 3) Use with Kalgoorlie-Boulder (YPKG) QNH only 4) Minima may be reduced by 100ft with actual QNH 5) BTW RWY 29 and RWY 18 only

Effective 12-JUN-2025

05-JUN-2025


KGI-YPKG

Australia Kalgoorlie Boulder


IAC

7-50

VOR Z 11

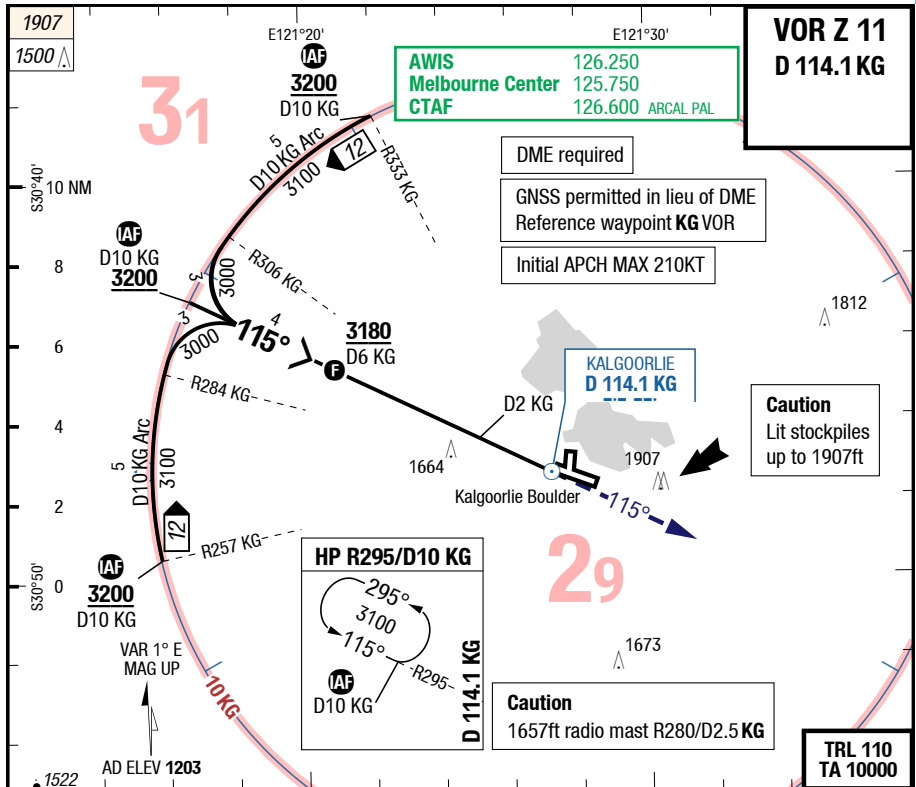

3.00°			6.1	5	4	3		83.0°	60 L
D KG								2000 x 45	
115°									
RWY 110°									

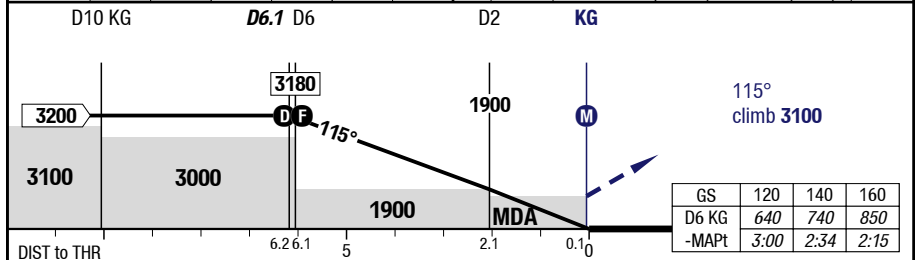


11	VOR DME					Circling
	1)					1) 2)
C	ft - m/km ft	580 - 3.3V 1780				980 - 4.0V 2180
D	ft - m/km ft	580 - 3.3V 1780				1000 - 5.0V 2200

1) Minima may be reduced by 100ft with actual QNH
2) BTW RWY 29 and RWY 18 only


Changes: OBST, Note

7-60

VOR Y 11

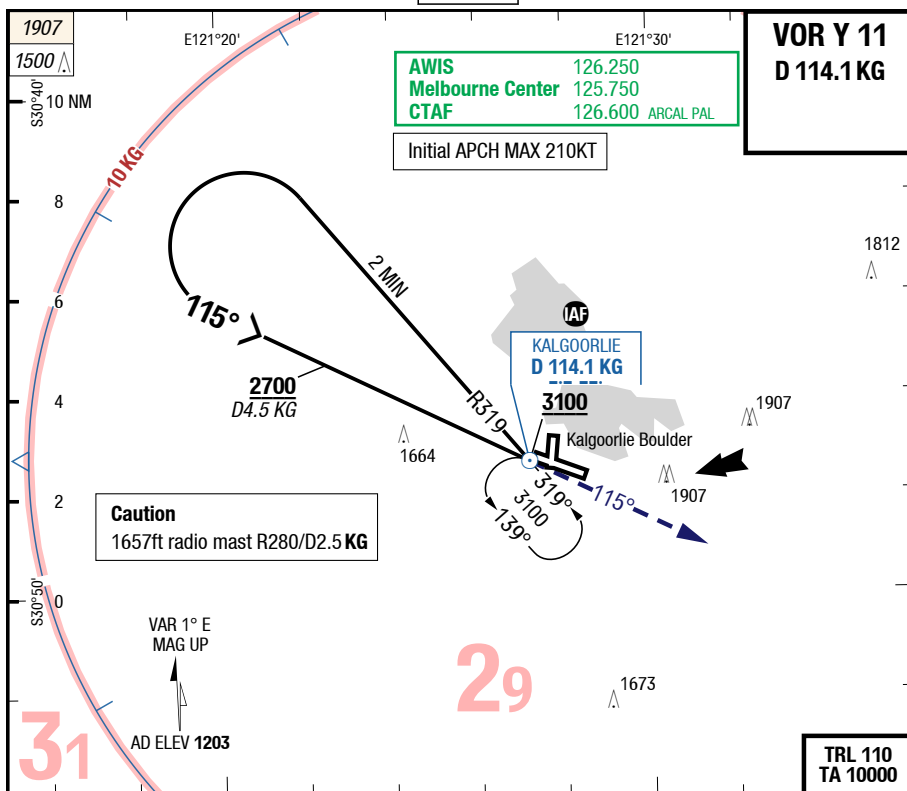

3.00°				4.5	4	3	11	83.0°	60 L
D KG								2000 x 45	
115°				2700	2540	2230			
RWY 110°								THR 1203 (43hPa) / TDZ --- (---%)	-0.9%

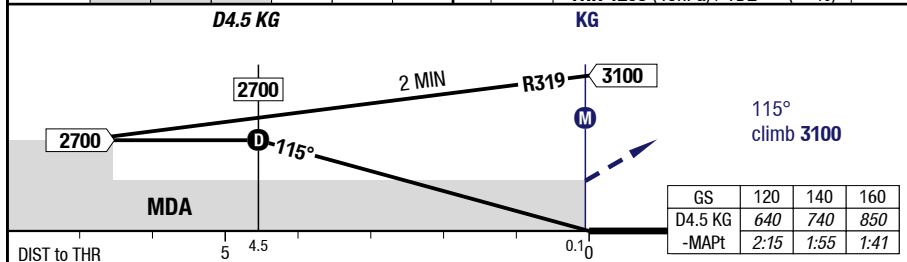


11		VOR 1)				Circling 1) 2)
C	ft - m/km ft	830 - 4.7V 2030				980 - 4.7V 2180
D	ft - m/km ft	830 - 4.7V 2030				1000 - 5.0V 2200

1) Minima may be reduced by 100ft with actual QNH

2) BTW RWY 29 and RWY 18 only

Changes: OBST

7-70

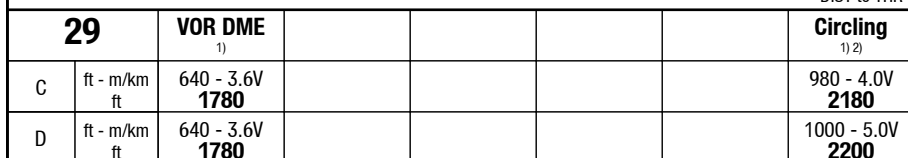

✓ **AirAsia (AirAsia)**

Effective 12-JUN-2025

05-JUN-2025


KGI-YPKG

Australia Kalgoorlie Boulder


IAC

7-80

VOR Y 29

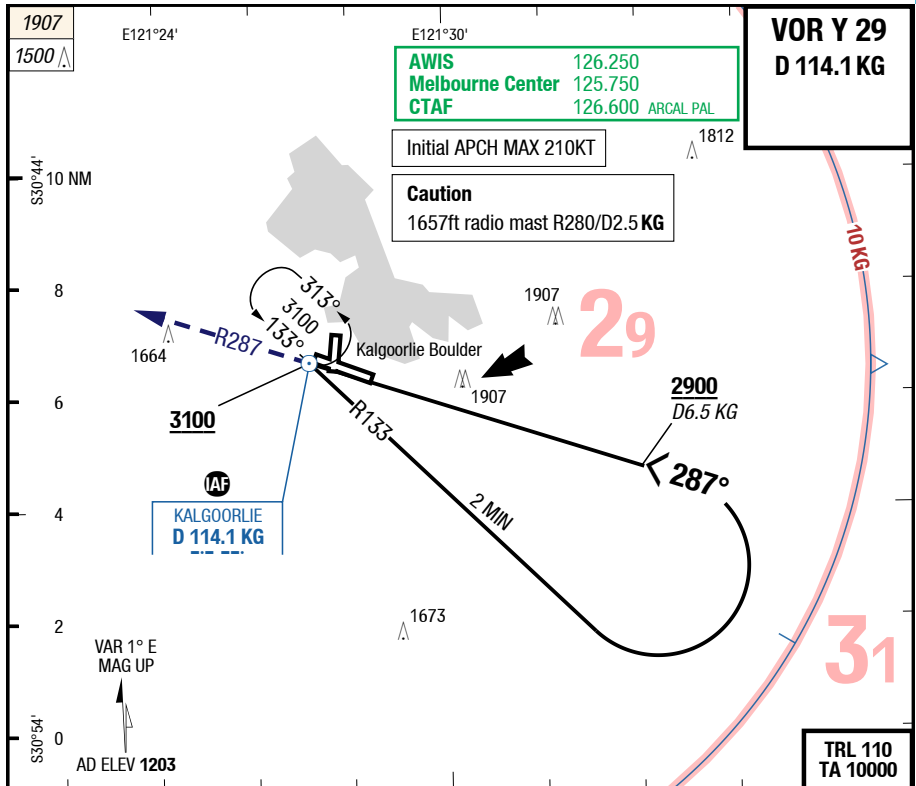

60 L	45 x 2000	29	4	5	6	6.5			3.00°
	3.0°		2120	2430	2750	2900			D KG
+0.9%	TDZ --- (---%) / THR 1147 (41hPa)								Offset 3°
									RWY 290°

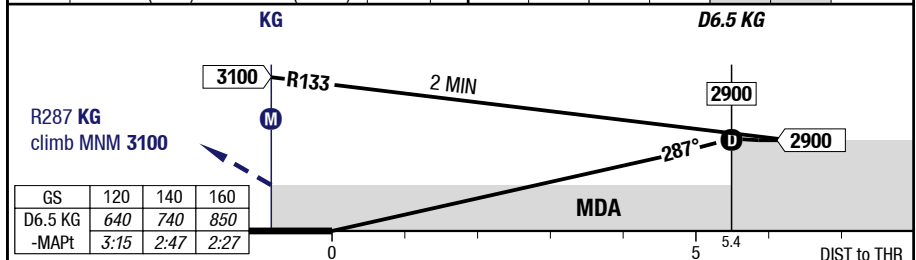


29	VOR					Circling
	1)					1) 2)
C	ft - m/km ft	960 - 5.0V 2100				1210 - 5.0V 2410
D	ft - m/km ft	960 - 5.0V 2100				1210 - 5.0V 2410

1) Minima may be reduced by 100ft with actual QNH
2) BTW RWY 29 and RWY 18 only


Changes: OBST

✓ AirAsia (AirAsia)

© Lido 2025

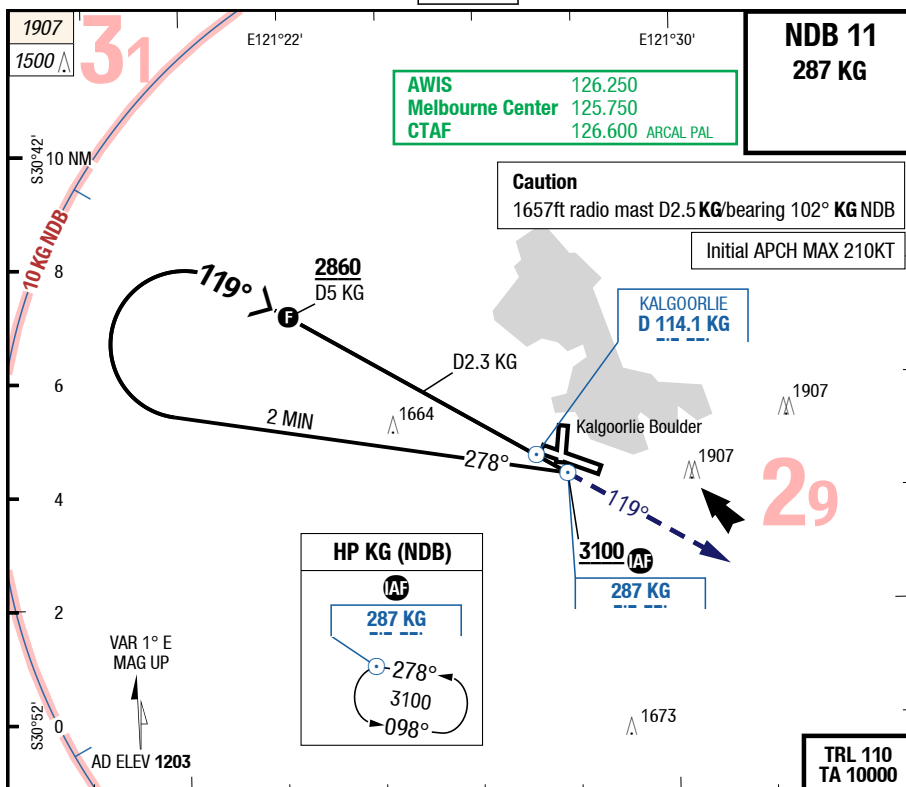

3.00° D KG		5	4	3	2		 3.0° 60 L 
Offset 10°							
RWY 110°		2860	2550	2230	1910		THR 1203 (43hPa) / IDZ --- (---%) -0.9%

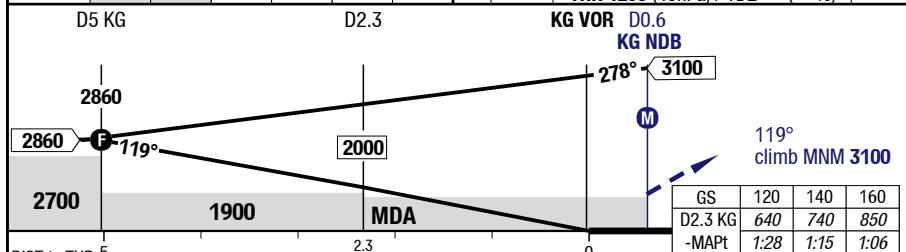

11		NDB DME KG ¹⁾	NDB ¹⁾			Circling ^{1) 2)}
C	ft - m/km ft	610 - 3.4V 1810	850 - 4.8V 2050			980 - 4.8V 2180
D	ft - m/km ft	610 - 3.4V 1810	850 - 4.8V 2050			1000 - 5.0V 2200

1) Minima may be reduced by 100ft with actual QNH
2) BTW RWY 29 and RWY 18 only

Changes: OBST