

YPPD Port Hedland

Airport

- AFC, AGC AWIS (valid 04-APR-2025 - UFN)
AWIS to read 133.200 Pulse 1s to ACT

Nav aids

- NIL

Runway

- NIL

SID

- NIL

STAR

- NIL

Procedures

- NIL

Minima

- NIL

Others

- NIL

1 GENERAL**1.1 Operational Hours****1.1.1 ATS Hours**

AFIS (MON-FRI 2330-1040, SAT 2330-0615, SUN 0400-1040)

AFIS HR may change at short notice. Check status of airspace with ATS or Port Hedland ATIS.

1.1.2 AD OPS Hours

Not published

1.2 Airport Information**1.2.1 RFF**

CAT 6,

MON-FRI 2315 - 1130

SAT 2315 - 0500

SUN 0415 - 1130

Fire: EMERG FREQ 131.000 AVBL for direct COM between flight crew and fire commander.

1.2.2 Fuel

Jet A-1, MON-FRI 2200-1000; other times 1HR PN.

1.2.3 PCR

| RWY 14/32: 390/F/A/X/T 60m either end not grooved

| RWY 18/36: 80/F/A/Z/U

1.2.4 Customs

Not published

1.3 Runway, Taxiway and Apron Restrictions**1.3.1 Runway Restrictions**

All ACFT above 20t / 44092lbs LDG RWY 14/32 must roll through to RWY end prior to executing 180° turn using turning nodes. Full back track to TWY A or G.

Wide body ACFT must use yellow dash lines when taxiing from RWY 14/32 onto TWY A.

1.3.2 Taxiway Restrictions**Weight Limitations**

ACFT ABV 20t / 44092lbs MTOW: TWY B, C and D not AVBL. Use TWY A or G.

ACFT ABV 50t / 110231lbs MTOW: TWY A not AVBL. Use TWY G H24, TFC flow permitting.

TWY E and northern APN MAX weight 5700kg / 12566lbs.

Other Restrictions

The following TWY are not lit, and are suitable for daylight OPS only:

- TWY C, D and E;
- TWY B BTN TWY A and TWY D;
- TWY B BTN TWY C and RWY 18/36.

1.3.3 Apron Restrictions

DEP ACFT from bays 1-8 must use turn out lines.

Pilots are REQ to minimise ground running of turboprop ACFT in the vicinity of parking bays 1-5 to reduce noise levels in terminal.

1.4 Operation

1.4.1 Traffic Notes

Outside AFIS HR, PAL + AFRU on 119.900; requires three one-second pulses to activate APCH lights.

PAL activates stage 2 lighting and main APN lightning. All other stages operated manually by AFIS or Duty Airport Operations Officer.

1.4.2 Transponder Operation

For details on Transponder Mode S Operation see CRAR.

1.5 Warnings

1.5.1 Caution Notes

- ACFT taxiing or holding on TWY A for RWY 14/32 may infringe ACFT APCH surface for RWY 36 or TKOF on RWY 18.
- Port Hedland Heliport YHIP BRG 321°/4.7NM FM ARP.
- HEL OPS WI 30NM of YHIP using night vision goggles primarily over water for maritime transfer my not be displaying external lighting.
- Weather balloon launch APRX 2315 from 240m / 787ft east of RWY 18 THR. Launches may occur at other times.
- Birds and animals in vicinity of AD.

2 ARRIVAL

2.1 Speed

MAX IAS 200KT at or below 2500ft AAL within 4NM of primary class D AD.

MAX IAS 250KT in remaining class D airspace.

MAX IAS 250KT below 10000ft in airspace classes E and G.

2.2 Communication Failure

See CRAR.

2.3 Noise Abatement Procedures (NAP)

See CRAR.

3 DEPARTURE

3.1 Take-off Minima

RWY		14/32	
Multi ENG	ft - m/km	0 - 800V	-
other		c300 - 2.0V	-

3.2 Speed

MAX IAS 200KT at or below 2500ft AAL within 4NM of primary class D AD.

MAX IAS 250KT in remaining class D airspace.


MAX IAS 250KT below 10000ft in airspace classes E and G.

3.3 Communication Failure


See CRAR.

3.4 Noise Abatement Procedures (NAP)

See CRAR.


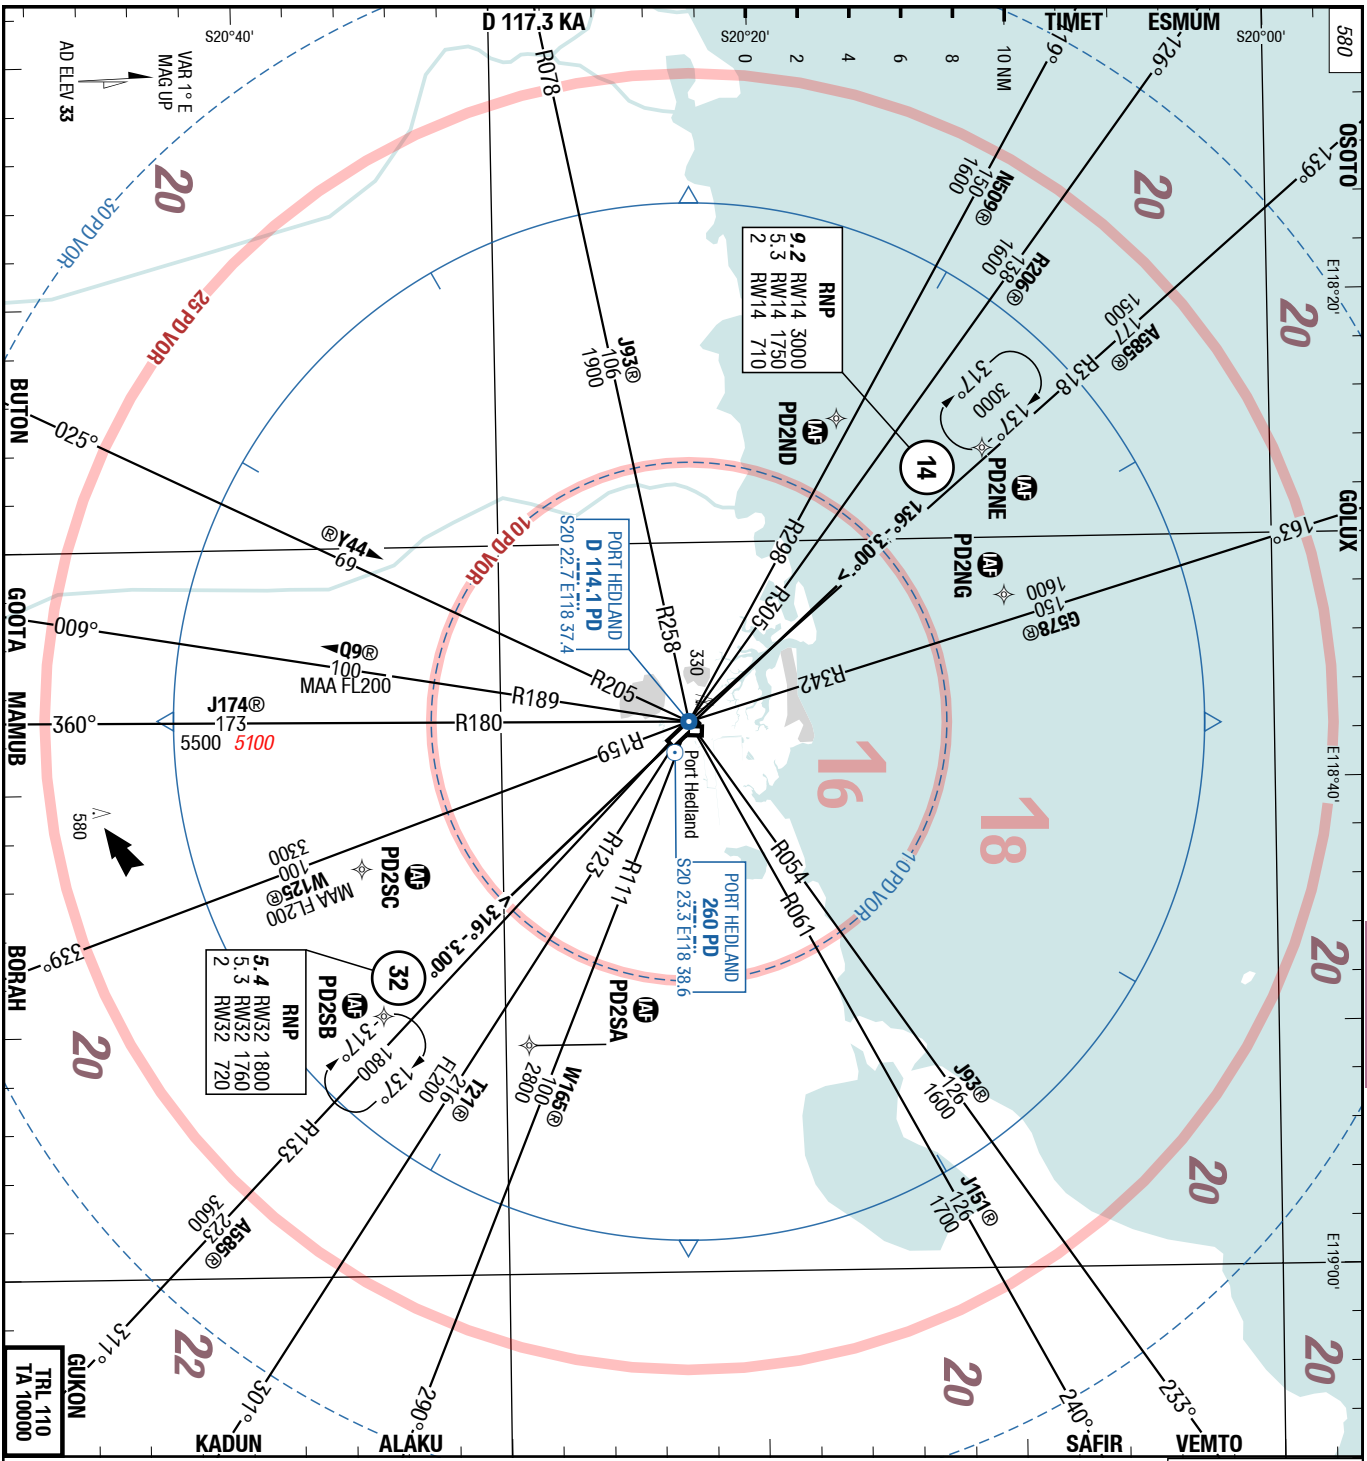





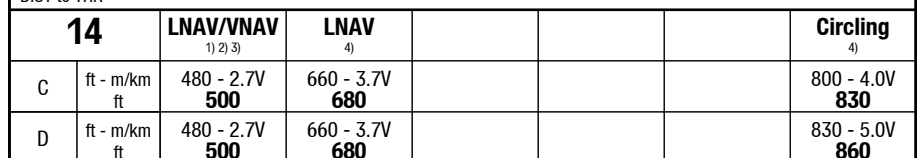

© Lido 2025

✓ **AirAsia (AirAsia)**

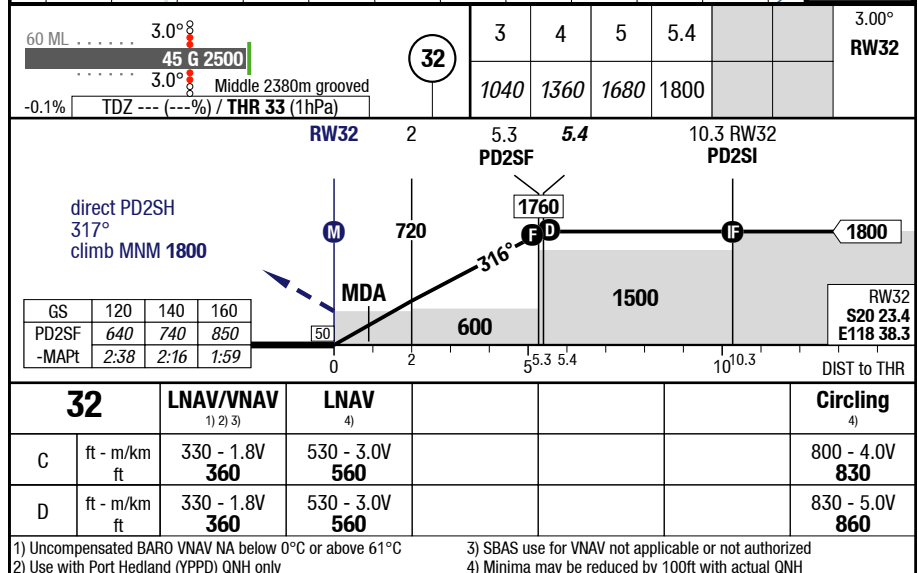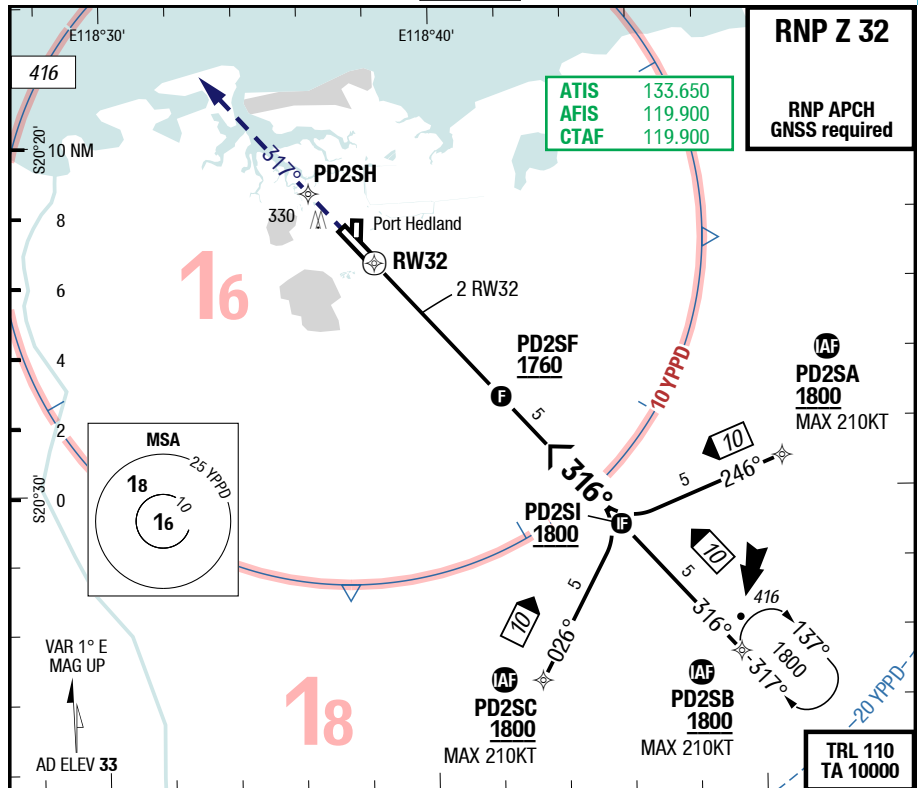

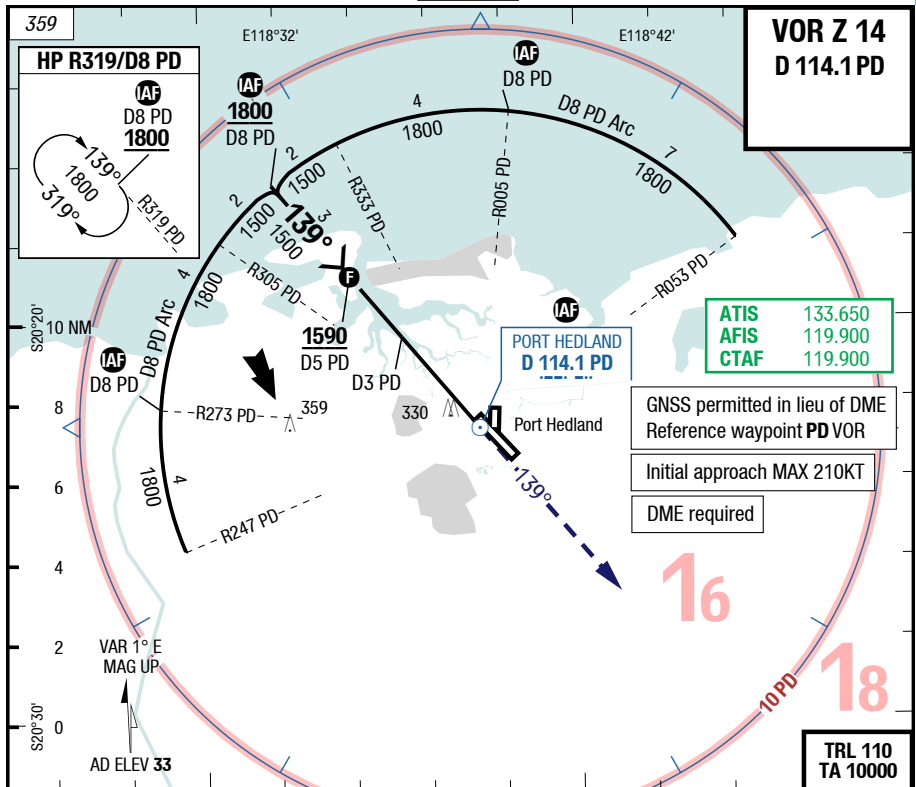


3.01°				5.7	4	14	2500 G 45 83.0° 60 ML
Offset 3°				1800	1280		Middle 2380m grooved 83.0° THR 23 (1hPa) / TDZ --- (---%) +0.1%
RWY 136°							


D8 PD
D5.7 D5
D3
PD

GS	120	140	160
D5 PD	640	750	850
-MAPt	2:30	2:09	1:52


1) Minima may be reduced by 100ft with actual QNH

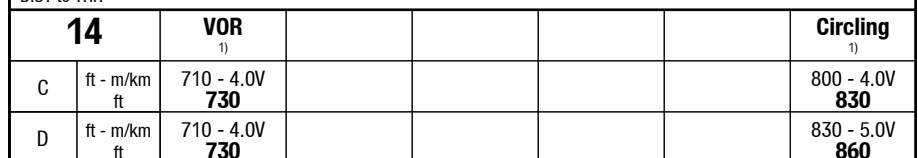


© Lido 2025

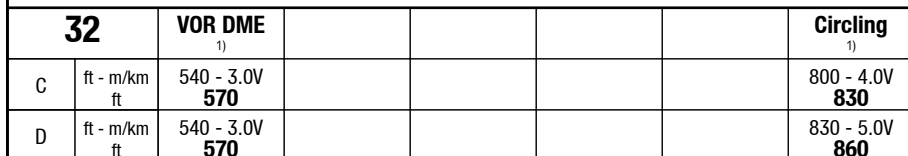

© Lido 2025

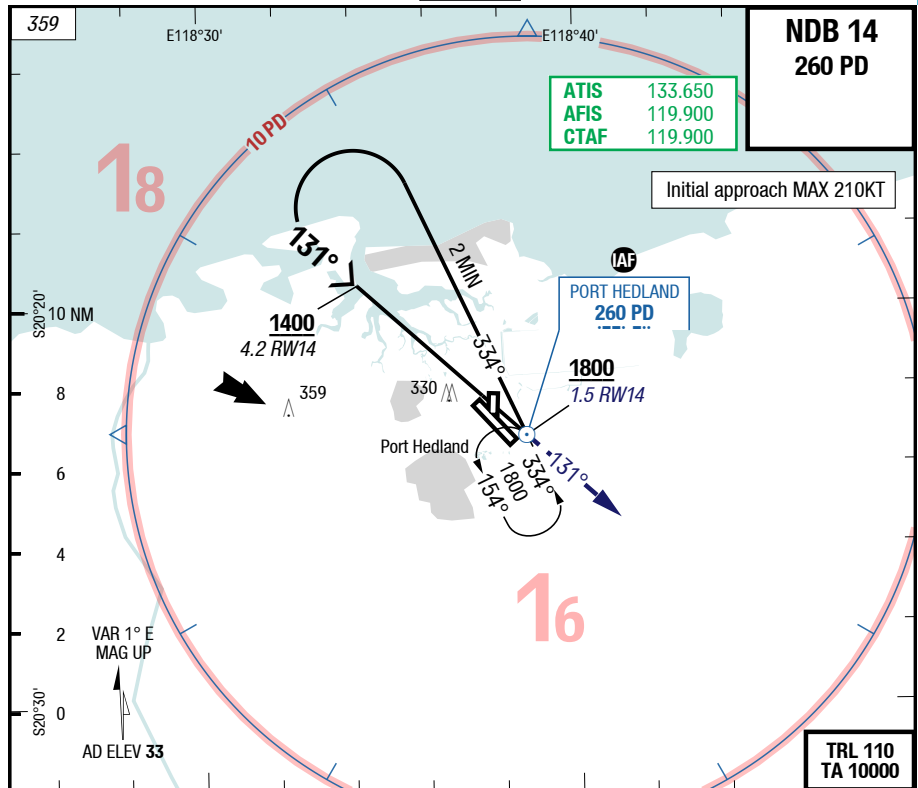

3.00°				4.2	4	3	14	8.3.0° 2500 G 45 60 ML
RW14				1400	1270	950		8.3.0° 2500 G 45 60 ML
Offset 5°				1400	1270	950		8.3.0° 2500 G 45 60 ML

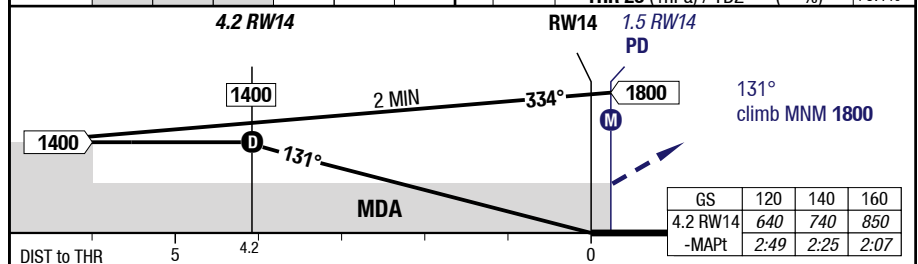

14		NDB 1)				Circling 1)
C	ft - m/km ft	710 - 4.0V 730				800 - 4.0V 830
D	ft - m/km ft	710 - 4.0V 730				830 - 5.0V 860

1) Minima may be reduced by 100ft with actual QNH