

YPPH Perth Intl

Airport

- AGC RWY maintenance (valid 02-JAN-2026 - UFN)

REF SUP H01/26

- RWY 03/21 CLSD every Friday BTN 2330-0330 UTC, excluding every third Friday. During these closures RWY 03/21 will be AVBL for DEP, if operationally required on 30min prior notice.
- RWY 06/24 CLSD every third Friday BTN 2330-0730 UTC.

Operators that can advise of an operational requirement for RWY 03/21 during the Friday closures include only:

- DEP, where departing from RWY 06/24 would result in an impact to passenger loads,
- For freighter, military or heavy charter operations RWY 06/24 is insufficient in length.

Advice of the operational requirement to use RWY 03/21 is to be made to ATC as early as practicable. For advice with less than 30 minutes notice, Perth Aerodrome will make every effort to make the runway available earlier however operators should expect some delay.

- RWY 03/21 CLSD on the second Saturday of every month BTN 0030-0830 UTC, with an option to schedule an additional Saturday full closure (closure up to 8 hours BTN 0030-0830 UTC, info via NOTAM). RWY 03/21 will NOT be available during Saturday closures.

ILS STATUS:

- During Friday closures, the default status for the ILS will be OFF to facilitate access to the Vehicle Critical Areas (VCA) and prioritise activity requiring entry to those areas.
- During Saturday closures, the default status for the ILS will be ON. The ILS for RWY 03 and RWY 21 may be turned off subject to the works areas and activities undertaken and be carried out in coordination with Airservices Australia.
- The ILS for RWY 24 will be turned OFF during RWY 06/24 closures, unless by other arrangement.

- AGC, APC WIP (valid 26-JAN-2026 - UFN)

REF SUP H03/26

Validity period: mid-FEB 2026 - SEP 2026 EST

The actual date and time of works will be advised by a NOTAM.

Construction of additional parking positions 513 and 514 located at the Central Domestic APN including realignment of existing ACFT parking positions 509 to 512. The works will be undertaken in stages to minimise disruption to operators and distributed via a MOWP.

Operational information:

- Normal scheduled A380 operations will be unaffected by these works.
- Closure of limited sections of Hotel Lane and 500 Lane are proposed between 2230-1030 UTC during some works stages, with closed areas being made available at the end of each shift until these works are completed.

- AFC, IAC ILS RWY 24 U/S (valid 25-FEB-2026 - UFN)

REF SUP H11/26

19 MAR 2026 - late 2027 / early 2028 EST

ILS RWY 24 U/S.

Following APCH procedures not AVBL:

- ILS Z or LOC Z 24
- ILS Y or LOC Y 24

RNP RWY 24 will continue to be AVBL, providing lateral and vertical guidance to the RWY.

RWY 03 and RWY 21 ILS APCHes will remain AVBL when weather conditions require.

- AGC TEMPO Charts (valid 30-APR-2026 - UFN)

Check TEMPO Charts distributed for this AD:

- Tempo WIP AIC H52/25

Nav aids

- NIL

Runway

- NIL

SID

- NIL

STAR

- NIL

Procedures

- NIL

Minima

- NIL

Others

- NIL

AMDB/AMM

YPPH Perth Intl

- AMDB/AMM RWY maintenance RWY maintenance (valid 01-JAN-2026 - UFN)
REF AIC H01/2026
RWY 03/21 CLSD (AVBL for DEP 30 min PPR) on FRI 2330-0330 EXC
EV third FRI when RWY 06/24 CLSD 2330-0730.

RWY 03/21 closures 2330-0330:
JAN 2, 9, 23, 30
FEB 13, 20
MAR 6, 13, 27
APR 17, 24
MAY 8, 15, 29
JUN 5, 19, 26
JUL 10, 17, 31
AUG 7, 21, 28
SEP 11, 18
OCT 2, 9, 23, 30
NOV 13, 20
DEC 4, 11

RWY 06/24 closures 2330-0730:
JAN 16
FEB 6, 27
MAR 20
APR 10
MAY 1, 22
JUN 12
JUL 3, 24
AUG 14
SEP 4, 25
OCT 16
NOV 6, 27
DEC 18

RWY 03/21 CLSD on s SAT EV month 0030-0830:
JAN 10,
FEB 14,
MAR 14,
APR 11,
MAY 9,
JUN 13,
JUL 11,
AUG 8,
SEP 12,
OCT 10,
NOV 14,
DEC 12

RWY 03/21 not AVBL DRG SAT closures.
Other SAT RWY 03/21 closures confirmed by NOTAM in advance.

- AMDB/AMM WIP WIP (valid 26-JAN-2026 - UFN)
REF AIC H03/2026

WIP N of PRKG Stand 512, PARL do TWY H LANE
FM MID FEB 2026 till SEP 2026

The actual date and time of works will be ADZD by NOTAM.
- AMDB/AMM WIP (valid 31-MAR-2026 - UFN)
REF AIC H52/2025

New RWY 03R/21L and new TWY system CONST works planned for
2026-2028.

Actual date and time of works will be ADZD by NOTAM.

Applications

- AMM for eRM RWY HLDG PSN (valid 11-JAN-2020 - PERM)
For the correctness of type of the holding position symbol,
please refer to AGC/APC

1 GENERAL**1.1 Operational Hours****1.1.1 ATS Hours**

H24

1.1.2 AD OPS Hours

Not published

1.2 Airport Information**1.2.1 RFF**

CAT 9, H24

Fire: EMERG FREQ 131.000 AVBL for direct COM between flight crew and fire commander.**1.2.2 Fuel**

Jet A-1, H24

1.2.3 PCR

RWY 03/21, 06/24: 700/F/A/1.70 MPa/T Grooved

1.2.4 Customs

Not published

1.3 Runway, Taxiway and Apron Restrictions**1.3.1 Runway Restrictions**

The following taxi manoeuvres are not AVBL for ACFT above 5700kg / 12566lbs MTOW:

- Exit RWY 06 left into TWY S;
- Exit RWY 21 left into TWY N;
- Exit RWY 24 right into TWY C;

1.3.2 Taxiway Restrictions

ACFT ENG overhanging TWY edges where no blast protection is provided are requested to be OPR at low PWR to prevent erosion and ENG damage.

Follow-me AVBL O/R.

Use judgemental oversteering method when taxiing via TWY intersection on Central Domestic APN and 900 Lane/TWY J1.

Aircraft Size Limitations

TXL GA MAX weight 19t / 41888lbs, MAX wingspan 24m / 79ft.

AVBL up to code letter C ACFT:

- Intermediate hold point of TWY A6.
- Link 4 between Bay 146 and Bay 202.
- Link 1, 2, 5-9.
- Terminal 3 TXL.
- TWY C and TWY W for RWY 24 behind code letter E ACFT or above at HLDG point for RWY 21.
- TWY W west of TWY R and W Lane for ACFT with MAX 50t / 110231lbs MTOW and E190.
- TWY R, H4, H Lane, 500 Lane.

- Via TWY C, TWY S and TWY N intersection when ACFT holding on TWY C or TWY N short of RWY 06/24.
- TWYs H3, Link 3 AVBL up to code letter C ACFT, except A321.

Intermediate hold point on TWY D (between RWY 03/21 and TWY A), Link 4 (between TWY C and Bay 147) restricted to A330 and below.

TWY D, B, A, J1, TWY V (between RWY 06/24 and APN TWY), Terminal 1 APN taxiway (between bay 154 and 156), APN TWY (between TWY B and V) AVBL up to code letter E ACFT.

Left turn from TWY J1 to APN TWY and right turn to TWY J1 from APN TWY restricted to A332 and code letter C ACFT and below.

Code letter C ACFT exit RWY 21 left via TWY P by HJ only.

Holding on TWY H3 and TWY H4 may be required due TWY strip convergence. ACFT on TWY H3 may be instructed to hold at the HLDG PSN located on TWY H3 (abeam Bay 13 marked by intermediate holding point and yellow cones) in the FLW cases:

- Taxiing of code letter D or above ACFT OPS with any other OPS;
- Any other OPS when ACFT are pushed tail North or South from Bay 12, except Code C and below pushed behind Bay 10;
- Any other OPS when ACFT are pushed tail North from Bay 13.

A388: TWY A, A9, A11 and D subject to AD OPR approval due to unserviceability of TWY C. TWY A6, A7 and A9 must be vacant for A388 taxiing on TWY A.

Simultaneous OPS between TWY H4 and B to/from the north not AVBL with:

- ACFT pushed back into TWY B mouth from Bay 12;
- ACFT OPS between APN TWY and TWY H3 via TWY B.

Code letter C and below, except A321:

- LT from TWY H3 via TWY B to southbound on APN TWY (and this route in reverse) HJ only.
- RT from TWY H3 via TWY D to northbound on APN TWY (and this route in reverse) HJ only.

OPS not AVBL due jet blast hazard:

- BTN TWY H4 and TWY B when Code D and above taxi after tail North push back Bay 13;
- BTN TWY H3 and TWY B or TWY H4 when Code D and above taxi after tail North push-back Bay 14;
- ACFT Code B and below must hold abeam Bay 703 when Code D ACFT and above push-back into TWY B from Bay 12.

1.3.3 Apron Restrictions

Use MNM PWR when entering, exiting and operating on all APNs.

Reversing of ACFT under own ENG PWR is not permitted without prior approval from AD.

Stands equipped with SAFEGATE VDGS:

- Terminal 1 & 2: 143-147, 147A/B, 148, 148A/B, 149, 149A/B, 150, 150A/B, 151, 151A/B, 152-155
- Terminal 3 & 4: 12, 13, 14, 15, 16, 17, 17A, 18, 18A 19, 20, 20A, 21-24

Aerobridge Lighting Configuration: The Aerobridge Retracted Indicator consists of two lights. The green light indicates the aerobridge is in the fully retracted position. The red light indicates that the aerobridge is not fully retracted or that an element of the VDGS is unserviceable. Should flight crew see a red light on any aerobridge they should not continue onto the bay until the aerobridge is repositioned and a green light is shown.

AD operator does not provide marshalling services. Where marshalling is required, the pilot should confirm arrangements with Ground Handlers prior to LDG.

1.4 Operation

1.4.1 Preferential Runways

LDG	TKOF
1. RWY 21, 03, 24 equally preferred.	1. RWY 21, 03, 06 equally preferred.
2. RWY 06	2. RWY 24

1.4.2 Transponder Operation

For details on Transponder Mode S Operation see CRAR.

1.5 Noise Abatement Procedures (NAP)

Overflight Restrictions

EXC where impractical in the normal course of OPS, MNM height over residential areas is:

- Jet ACFT 5000ft AGL:
- PROP ACFT 3000ft AGL.

Engine Run-up Areas

ENG run-ups on APN only permitted by approval from AD OPR and to be conducted not above idle PWR.

1.6 Low Visibility Procedures (LVP)

LVP in force when CEIL is 300ft or less, VIS for TKOF is below 550m RV/RVR, VIS for APCH is below 550m RV/RVR RWY 03/21 or 800m RV RWY 06/24.

During LVP only one RWY will be nominated, normally RWY 21.

Follow-me O/R.

Advanced Surface Movement Guidance and Control System (A-SMGCS) in use when LVP activated.

1.7 Warnings

1.7.1 Caution Notes

SEV TURB may be experienced BLW 3000ft in the terminal area during summer months when easterly wind gradients prevail.

Expect jet blast on TWY H3 from ACFT on APN edge TWY.

Birds in vicinity of AD.

Weather balloon launch at 2315± and 1115± APRX from 0.81NM NE ARP. Launches may occur at other times.

2 ARRIVAL**2.1 Speed**

MAX IAS 250KT below 10000ft irrespective of airspace class passed. ATC may cancel the speed restrictions in airspace classes A to C.

MAX IAS 200KT at or below 2500ft AAL within 4NM of primary class D AD.

2.2 Communication Failure

See CRAR and in addition:

All STARS

- Comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR CLR to the nominated RWY, then fly the most suitable APCB in accordance with ERSA EMERG.

2.3 Arrival Procedure**2.3.1 Minimum Runway Occupancy Time (MROT)**

Ensure Standard MROT procedures. Refer to RAR and in addition:

- Whenever operational conditions permit, expect to vacate RWY via the following TWYs.
- Plan a predictable and efficient exit from RWY and if an exit other than the preferred is required, advise TWR on first contact.
- Landing Exit Distance (LED), the distance from THR to the furthest edge of the exit TWY, are provided to assist planning.

RWY	ACFT Type	Preferential Exit TWY	LED
RWY 03	PROP, F100/E195/RJ1H and below	A6/C6	1588m / 5210ft
	Jet above F100/E195/RJ1H	P	1975m / 6480ft
		D	2640m / 8661ft
RWY 21	PROP, Jet Light, Medium	A6/C6	1777m / 5830ft
	Jet Heavy	A7	1984m / 6510ft
		C9	2484m / 8150ft
RWY 24	All	J1/A (Note 2)	1636m / 5367ft

Note 1: ACFT may vacate at an earlier exit without ATC approval.

Note 2: These exits have different LEDs if vacating left or right and the distance promulgated is the shortest of these LEDs

Note 3: Preferred exits for RWY 06 not promulgated due infrequent use.

2.3.2 Reduced Runway Separation Minima Between Aircraft Using the Same Runway

By day, ATC may use 2400m RWY separation between ACFT ARR to RWY 03/21. Both ACFT may occupy the RWY during application of the standard.

2.3.3 Non-standard GP Intercept Position on RWY**RWY 03**

GP intercepts RWY 03 at 326m / 1069ft after landing threshold.

Remaining DIST beyond GP is 3118m / 10230ft.

2.3.4 Additional Arrival Information

2.3.4.1 Estimated Airborne Traffic Delays

On MON-FRI, expect following delays due to TFC density:

- 0100-0500: 20min
- 0500-0900: 10min
- 0900-1300: 20min

Actual holding times may differ from holding estimates.

2.3.4.2 Ground Delay Program (GDP)

The GDP applies to all non-priority flights departing from all Australian domestic airports and arriving at YPPH between 0030-1400 MON-FRI.

In addition, flights departing from Jandakot for a landing at YPPH must contact Perth Centre on 135.250 prior to starting engines.

2.4 Noise Abatement Procedures (NAP)

See CRAR and in addition:

Preferred Flight Paths

Non-STAR tracking must follow approximate STAR tracks, except:

RWY 21

- From South: ACFT at or below 45t / 99208lbs MTOW, visual left circuit.
- From West: Via WOOFY to 6NM final RWY 21 for VIS APCH.

RWY 24

- From South: Via SPUDO.

RWY 03

- From South or West:
 - Via HARMN for ILS APCH.
 - Via 5NM final RWY 03 for VIS APCH.

RWY 06

- From Southwest or West: West of the coast then via straight in APCH.

2.5 Warnings

2.5.1 Caution Notes

Low-level windshear may exist for ARR ACFT on RWY 06 when wind is from N to NW at 37KT or greater.

2.5.2 NAVAID Restrictions

RWY 03/21 GP false indications possible due to ACFT lining up from the east on TWYs W and C11

3 DEPARTURE**3.1 Take-off Minima**

RWY		21	
Multi ENG	ft - m/km	0 - 75R	For CASA approved OPR
		0 - 550R/550V	REDL+RCLM
		0 - 800R/800V	wo LGT, HJ only
other		c300 - 2.0V	-
RWY		03	
Multi ENG	ft - m/km	0 - 125R	For CASA approved OPR
		0 - 550R/550V	REDL+RCLM
		0 - 800R/800V	wo LGT, HJ only
other		c300 - 2.0V	-
RWY		06/24	
Multi ENG	ft - m/km	0 - 350R	For CASA approved OPR
		0 - 550R/550V	REDL+RCLM
		0 - 800R/800V	wo LGT, HJ only
other		c300 - 2.0V	-

3.2 Speed

MAX IAS 250KT below 10000ft irrespective of airspace class passed. ATC may cancel the speed restrictions in airspace classes A to C.

MAX IAS 200KT at or below 2500ft AAL within 4NM of primary class D AD.

3.3 Communication Failure

See CRAR and in addition:

SID PERTH 6 (RADAR)

- Maintain last assigned vector for 2min: and
- Climb if necessary to MSA to maintain terrain CLR; then
- Proceed in accordance with the latest ATC route CLR acknowledged.

3.4 Start-up Procedures**3.4.1 Start-up/Push-back**

ACFT with GND PWR shall contact DLV when ready for start-up or push-back.

ACFT without GND PWR is approved to start-up at own discretion. Inform DLV when start-up completed.

3.4.2 ATC Slot and Clearance

Contact DLV for CLR. Provide stand number to ATC on acknowledgement of airways CLR.

3.4.3 Airport Collaborative Decision Making (A-CDM)

A-CDM concept in use at this airport. See General Part/RAR/RAR In-Flight.

3.4.4 Gate Hold Procedure**Ground Delay Program (GDP)**

The GDP applies to all non-priority flights departing YPPH between 2130-0030 MON-FRI. GND will make a general broadcast advising early CLR is AVBL when demand is lower than capacity due to gate delays.

During periods when start approvals are required due extensive DLA, ACFT will be assigned a 'start sequence number' at CLR issue. When issuing a start approval, GND will quote that ACFT 'start sequence number' to assist other ACFT in determining their position in the start order. If assigned a start sequence number pilots must monitor GND for this advice and start approval. Operators may request to swap start sequence numbers of own company ACFT by contacting TWR via phone +61 894 768 625.

3.5 Departure Procedure**3.5.1 Minimum Runway Occupancy Time (MROT)**

Ensure standard MROT procedures. Refer to RAR.

3.6 Noise Abatement Procedures (NAP)


See CRAR and in addition:

Preferred Flight Paths

ACFT departing to the east of Perth on SIDs will be kept on track until leaving 8000ft except when required for operational reasons.


3.7 Low Visibility Procedures (LVP)


INT TKOF prohibited during LVP.

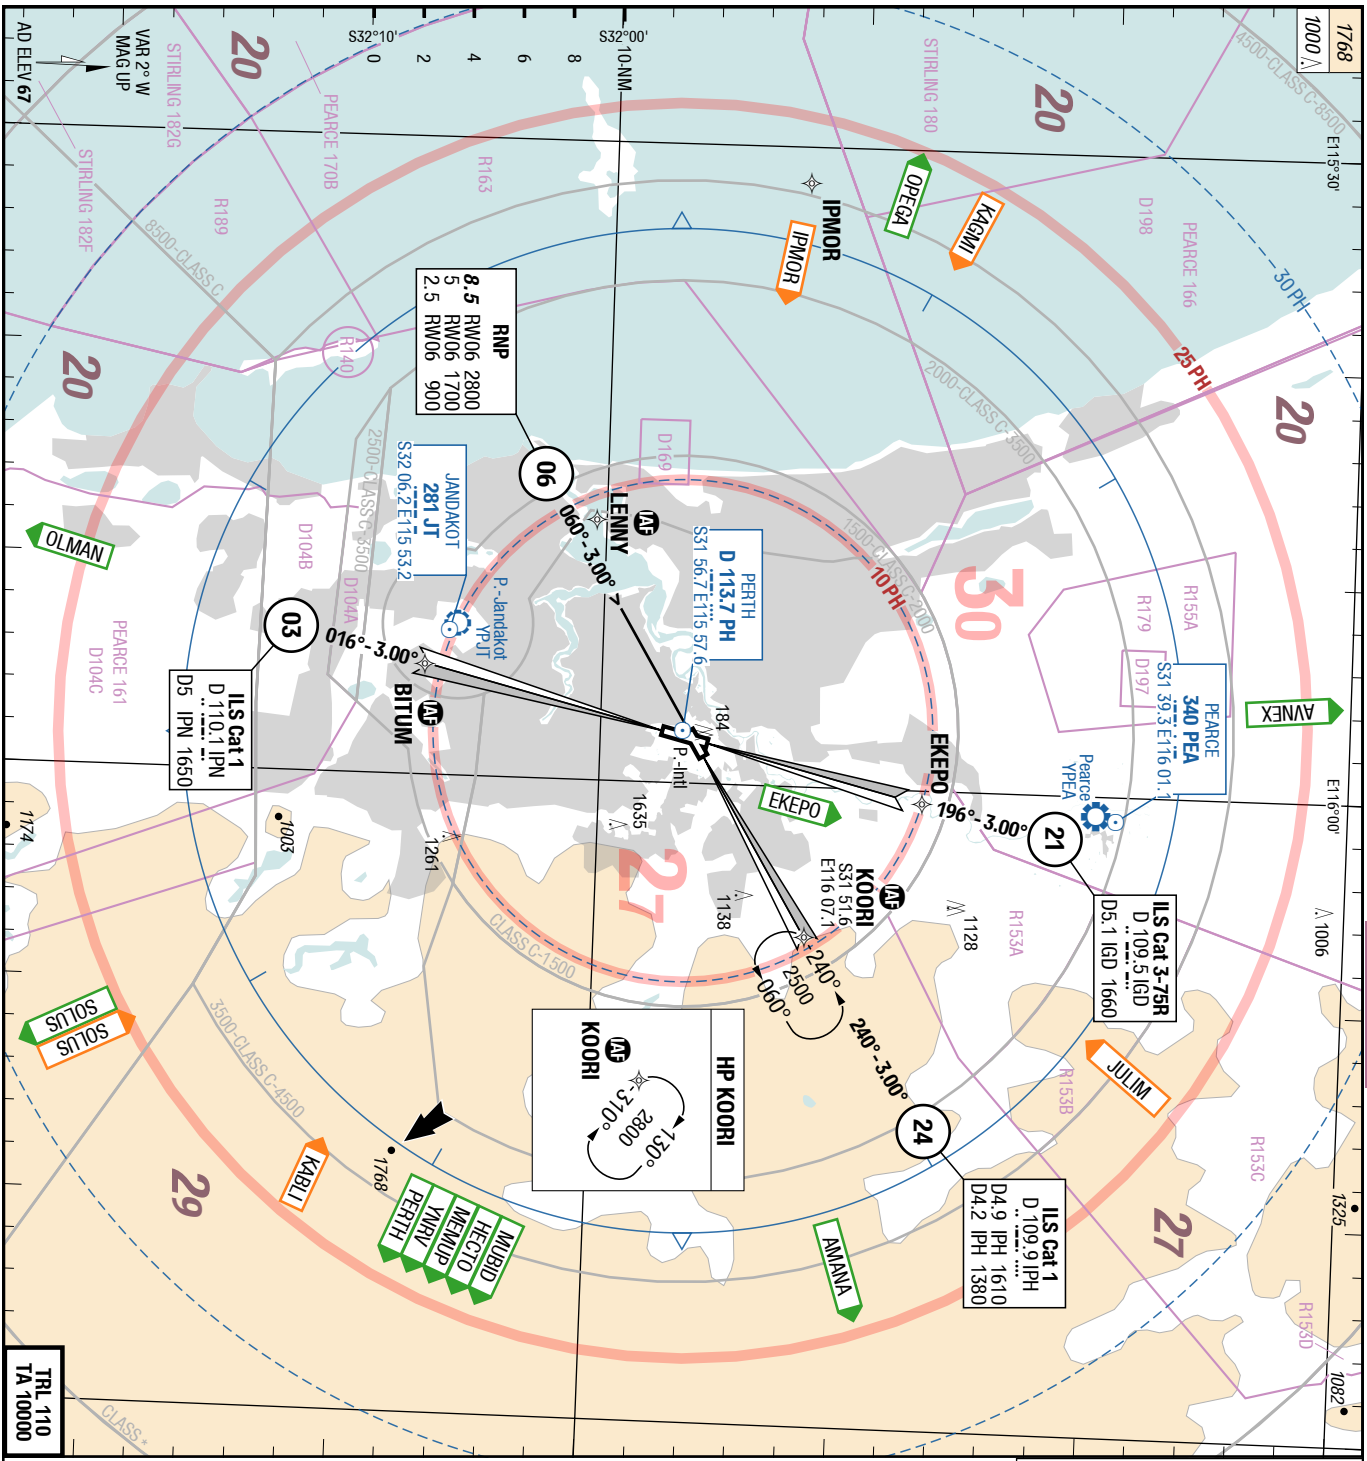


D-ATIS	113.700 PH
Center	123.800
APP	135.250
DEP	123.600
TWR	132.950
GND	118.700
DLV	127.400
PDC	121.700 W of Rwy 03/21
	122.200 E of Rwy 03/21
	118.550
	132.950

03	THR 67 (2HPa) / TDZ --- (---%)	06	THR 58 (2HPa) / TDZ --- (---%)	21	THR 43 (2HPa) / TDZ --- (---%)	24	THR 58 (2HPa) / TDZ --- (---%)
HL-P1	15 HL	HL-P1	15 HL	HL-P2F	15 HL	HL-P1	15 HL
60 HM	3.0° 8	60 HM	3.0° 8	60 HM	3.0° 8	60 HM	3.0° 8
45 G 3444	45 G 3444	45 G 2163	45 G 2163	45 G 2163	45 G 2163	45 G 2163	45 G 2163
TDZ --- (---%)	TDZ --- (---%)	TDZ --- (---%)	TDZ --- (---%)	TDZ --- (---%)	TDZ --- (---%)	TDZ --- (---%)	TDZ --- (---%)
THR 67 (2HPa)	THR 43 (2HPa)	THR 58 (2HPa)	THR 58 (2HPa)	THR 43 (2HPa)	THR 58 (2HPa)	THR 58 (2HPa)	THR 58 (2HPa)
HL-P1	HL-P2F	HL-P1	HL-P1	HL-P2F	HL-P1	HL-P1	HL-P1

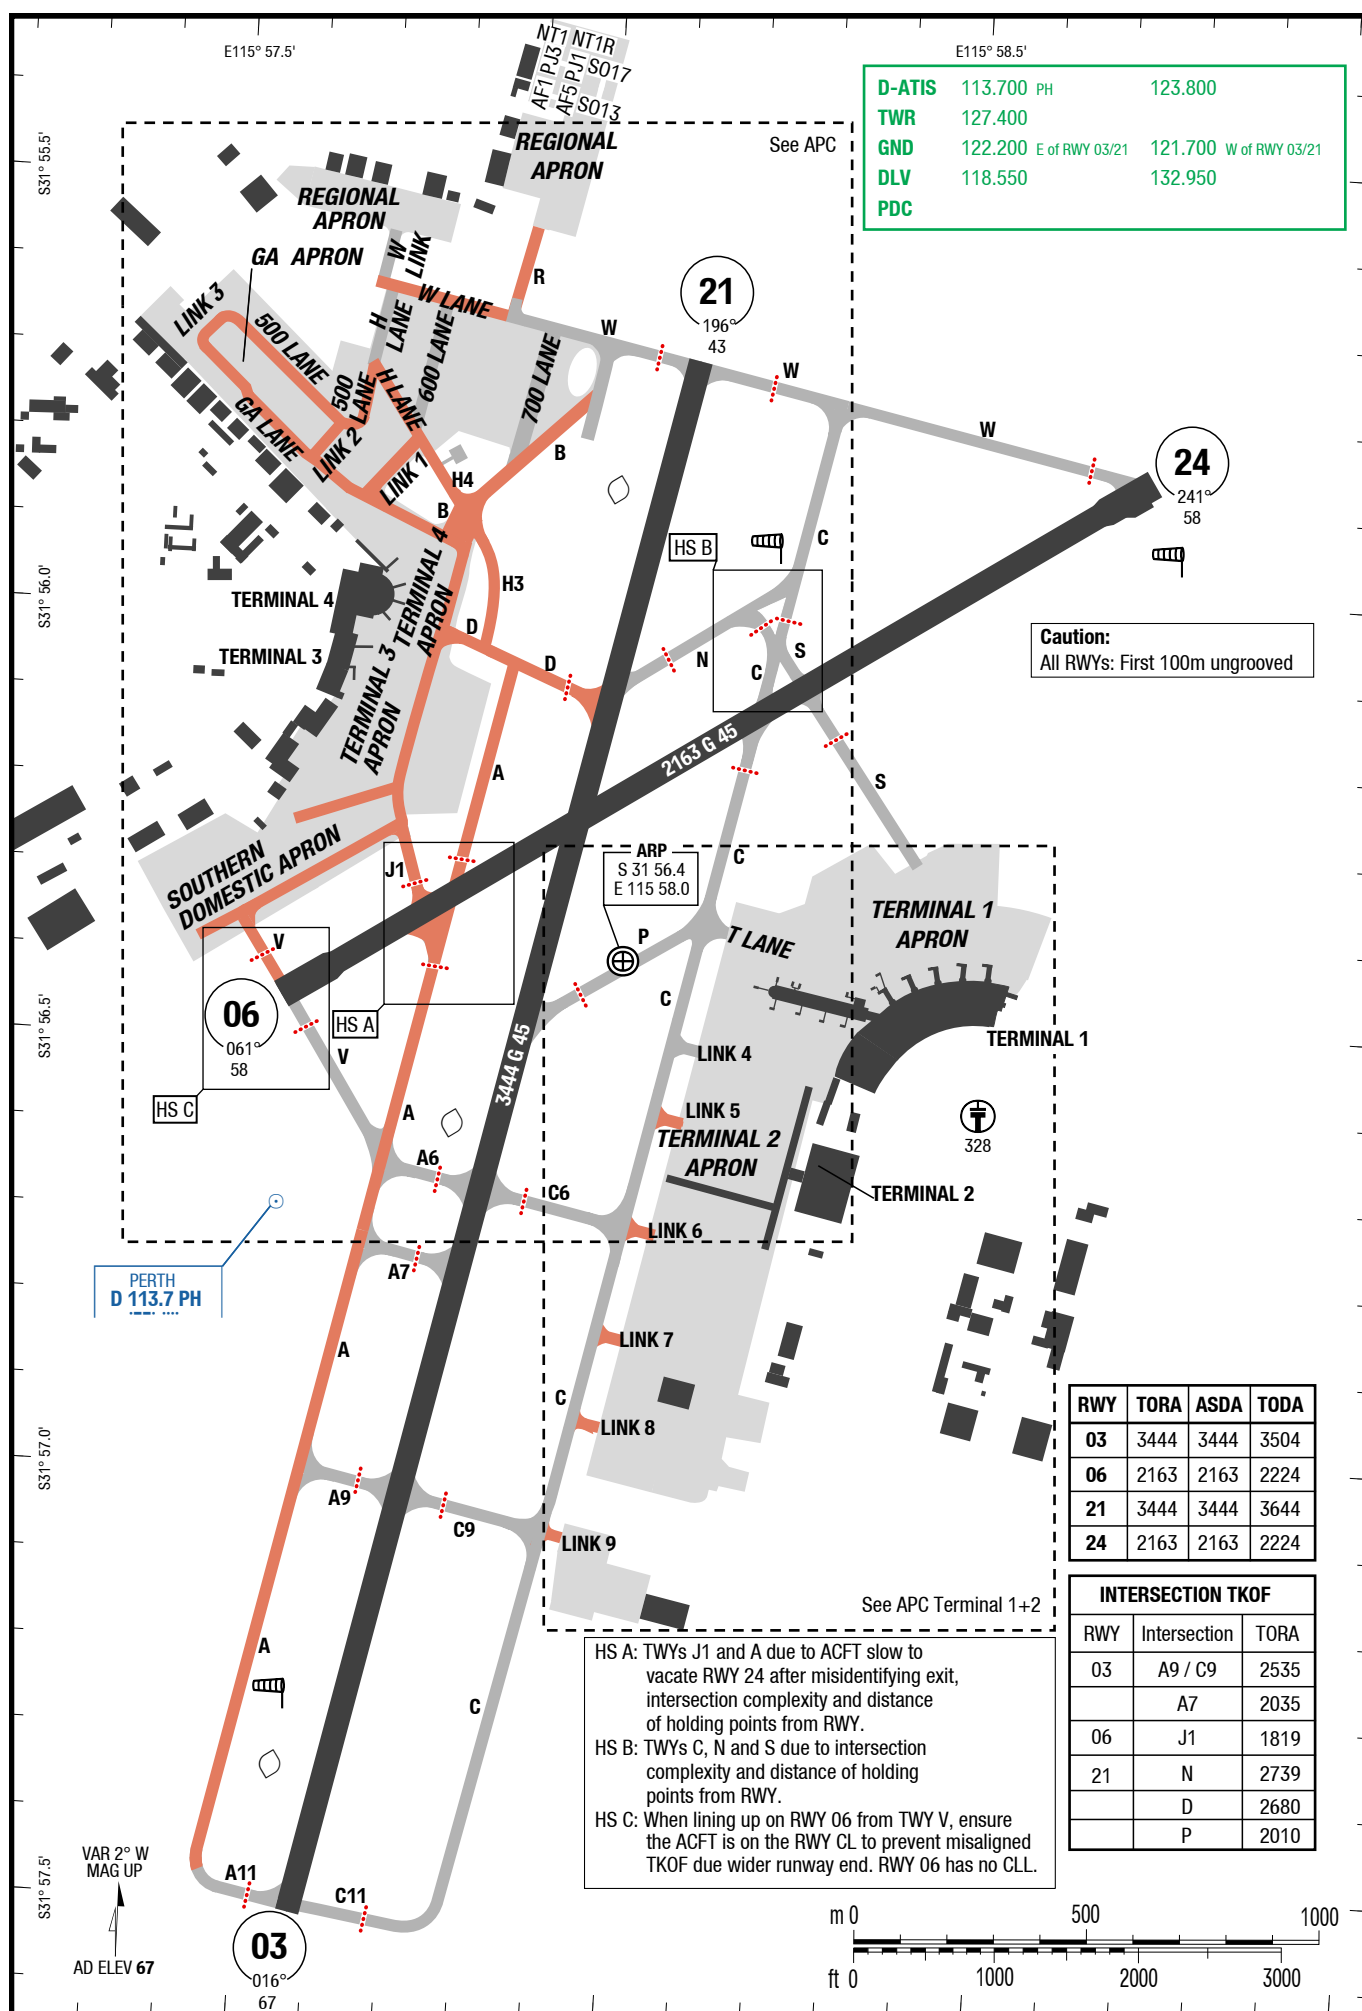

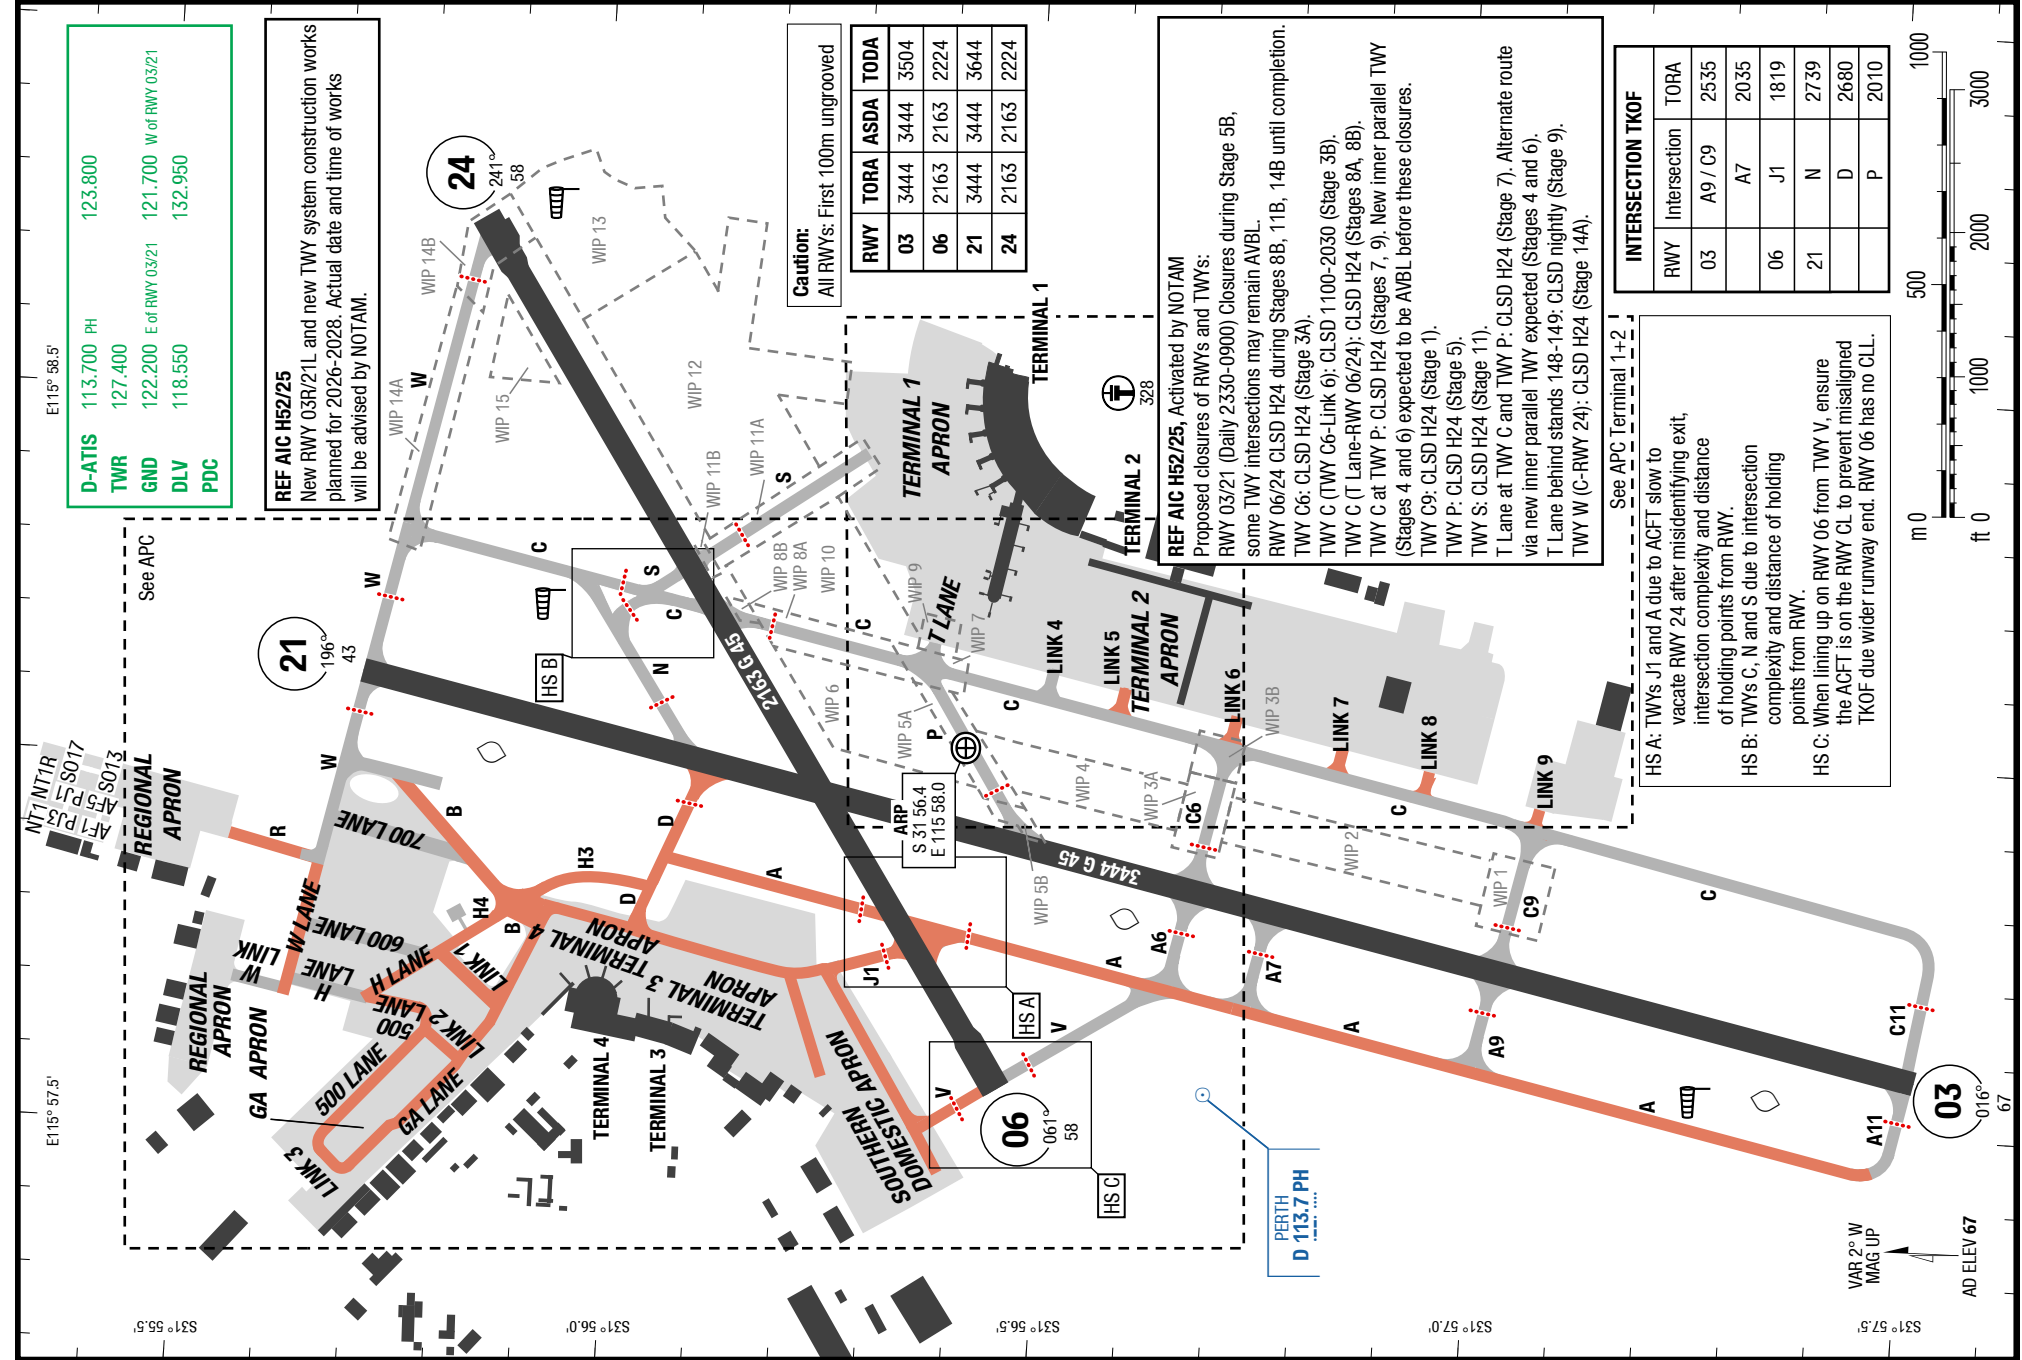

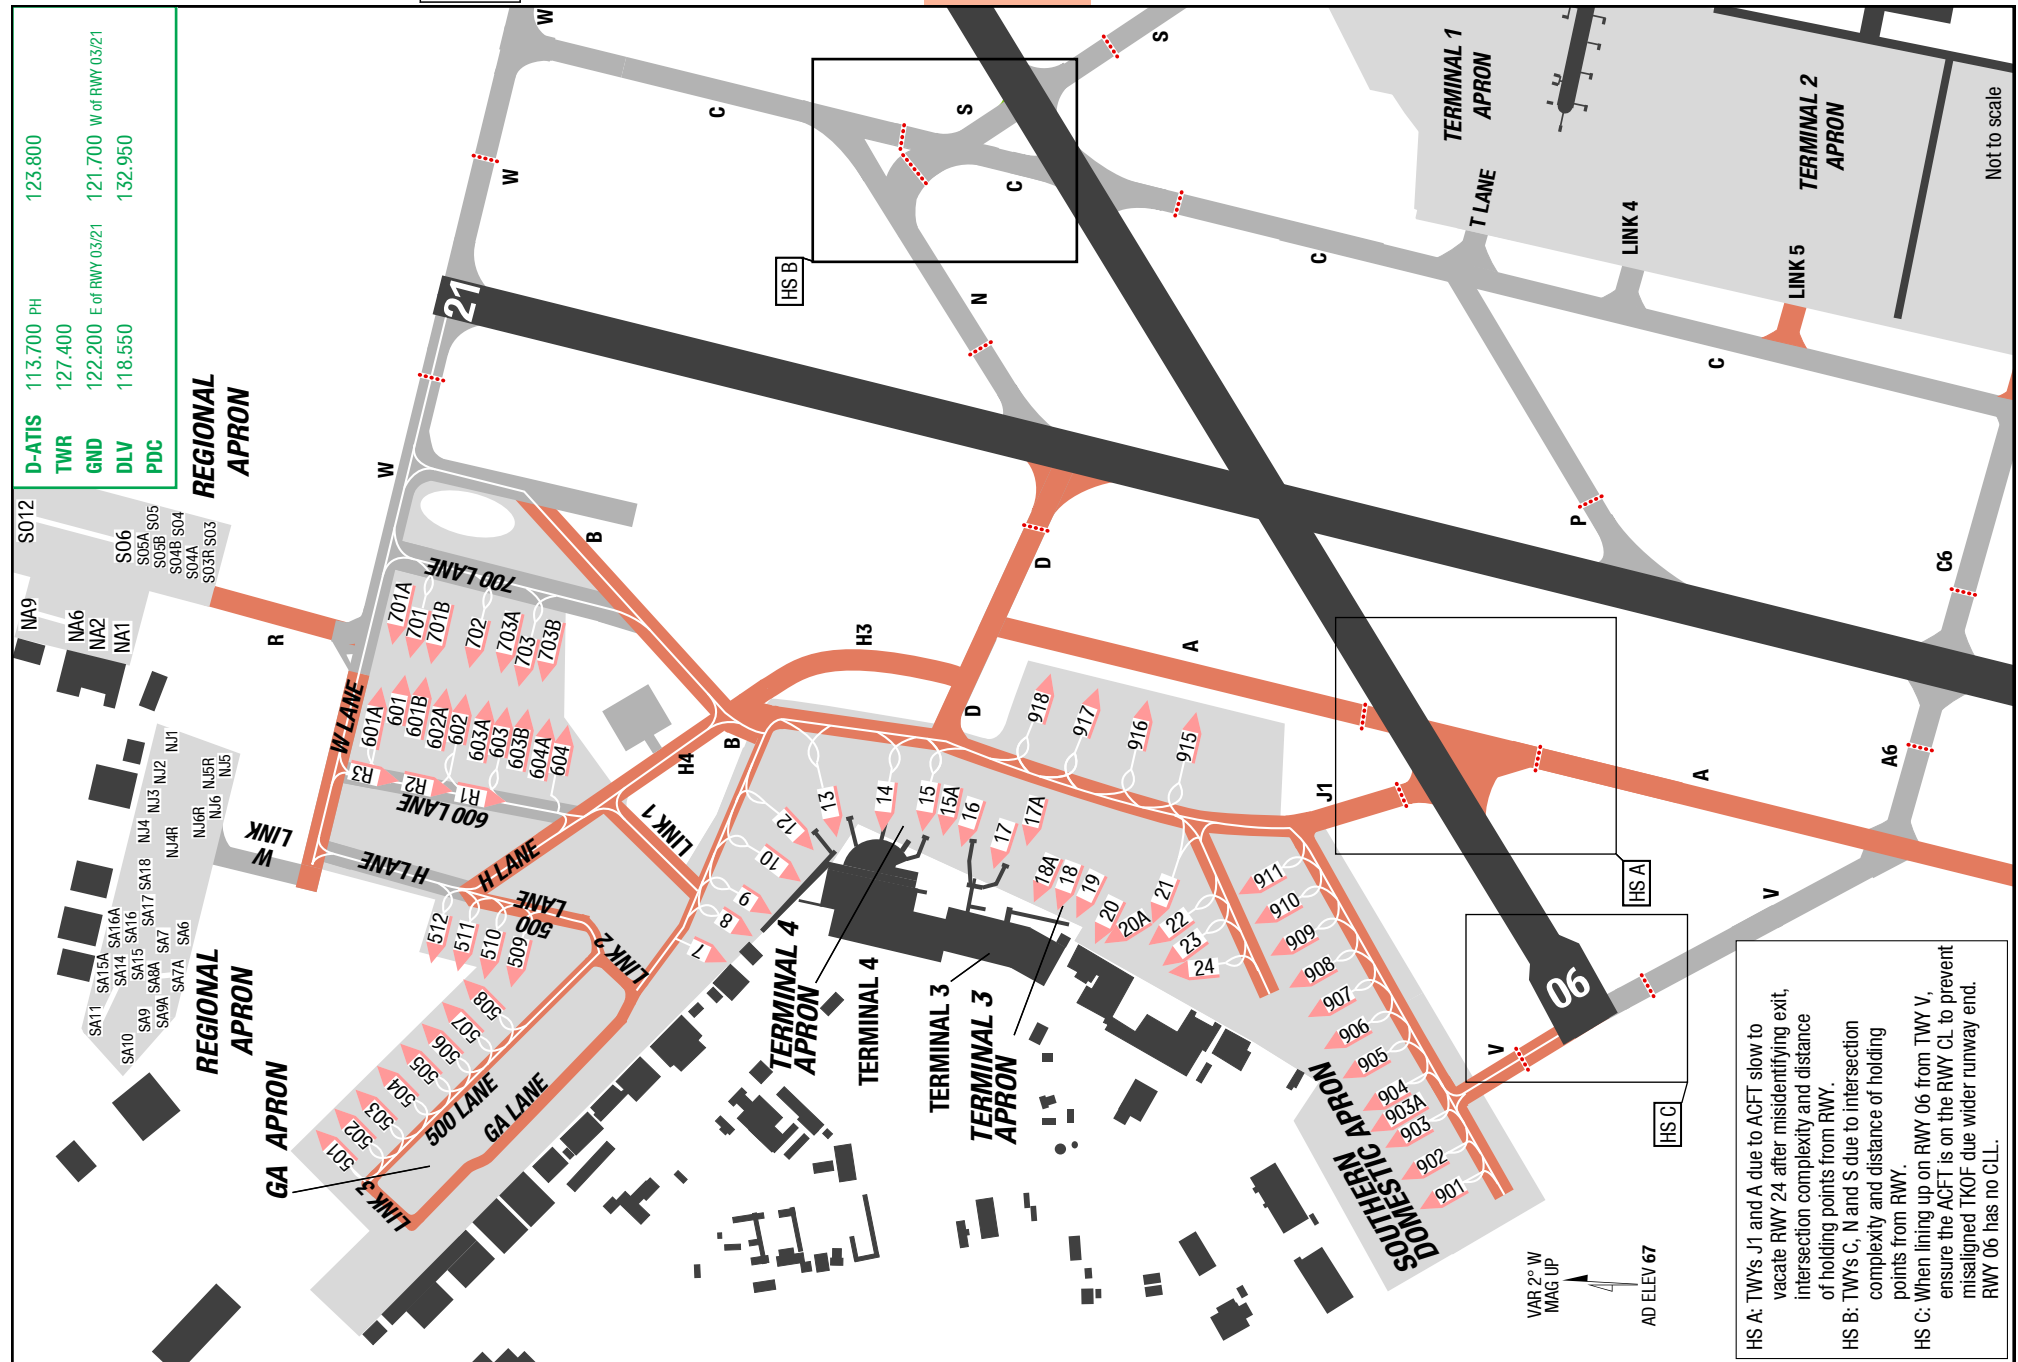




PER-YPPH

3-50

Stand Coordinates

Stand Coordinates

7-8	S31 55.9 E115 57.6	286	S31 57.0 E115 58.2	S04A/B	S31 55.5 E115 57.9
9-10	S31 55.9 E115 57.7	287, 288	S31 56.9 E115 58.2	S05, S05A/B	S31 55.5 E115 57.9
12-15A	S31 56.0 E115 57.7	501, 502	S31 55.6 E115 57.5	S06, S07	S31 55.5 E115 57.9
16-20A	S31 56.1 E115 57.7	503-505	S31 55.7 E115 57.5	S08, S09	S31 55.5 E115 58.0
21-24	S31 56.2 E115 57.6	506-508	S31 55.7 E115 57.6	S010-S014	S31 55.4 E115 58.0
143-144	S31 56.5 E115 58.3	509, 510	S31 55.8 E115 57.6	S015, S015A	S31 55.4 E115 58.0
145-147B	S31 56.5 E115 58.2	511, 512	S31 55.7 E115 57.6	S016, S016A	S31 55.4 E115 58.0
148-149B	S31 56.4 E115 58.2	601 - 602A	S31 55.7 E115 57.8	S017	S31 55.4 E115 58.0
150-150B	S31 56.4 E115 58.3	603-604A	S31 55.8 E115 57.8	VA1, VA2	S31 57.1 E115 58.0
151-151A	S31 56.5 E115 58.3	701 - 702	S31 55.7 E115 57.8	VA3	S31 57.2 E115 58.1
151B	S31 56.4 E115 58.3	703-703B	S31 55.8 E115 57.8		
152, 153	S31 56.4 E115 58.4	901, 902	S31 56.4 E115 57.4		
154, 155	S31 56.4 E115 58.5	903-906	S31 56.3 E115 57.5		
156-156B	S31 56.4 E115 58.6	907-910	S31 56.3 E115 57.6		
160-161A	S31 56.3 E115 58.5	911	S31 56.2 E115 57.7		
162	S31 56.3 E115 58.3	915, 916	S31 56.2 E115 57.8		
162A	S31 56.3 E115 58.4	917-918	S31 56.1 E115 57.8		
162B-163B	S31 56.3 E115 58.3	AF1	S31 55.3 E115 57.9		
201-203	S31 56.6 E115 58.3	AF2	S31 55.4 E115 57.9		
204	S31 56.6 E115 58.2	AF3	S31 55.3 E115 57.9		
205-207	S31 56.7 E115 58.2	AF4, AF5	S31 55.4 E115 57.9		
208-212	S31 56.7 E115 58.1	NA1-NA7	S31 55.5 E115 57.9		
213-214	S31 56.7 E115 58.2	NA8, NA9	S31 55.4 E115 57.9		
215-218	S31 56.8 E115 58.2	NJ1	S31 55.6 E115 57.8		
219, 220	S31 56.9 E115 58.2	NJ2-NJ4R	S31 55.5 E115 57.7		
250	S31 56.6 E115 58.1	NJ5	S31 55.6 E115 57.8		
251-254	S31 56.6 E115 58.2	NJ5R-NJ6R	S31 55.6 E115 57.7		
255	S31 56.6 E115 58.1	NT1, NT1R	S31 55.3 E115 57.9		
260-269	S31 56.8 E115 58.1	PJ1-PJ3	S31 55.3 E115 57.9		
270, 270A	S31 56.9 E115 58.0	SA6-SA9A	S31 55.5 E115 57.6		
271-271B	S31 56.9 E115 58.1	SA10	S31 55.5 E115 57.5		
277, 278	S31 56.9 E115 58.1	SA11-SA17	S31 55.5 E115 57.6		
279	S31 56.9 E115 58.0	SA18	S31 55.5 E115 57.7		
280, 281	S31 57.0 E115 58.0	S03, S03R	S31 55.6 E115 57.9		
282-285	S31 57.0 E115 58.1	S04	S31 55.6 E115 57.9		

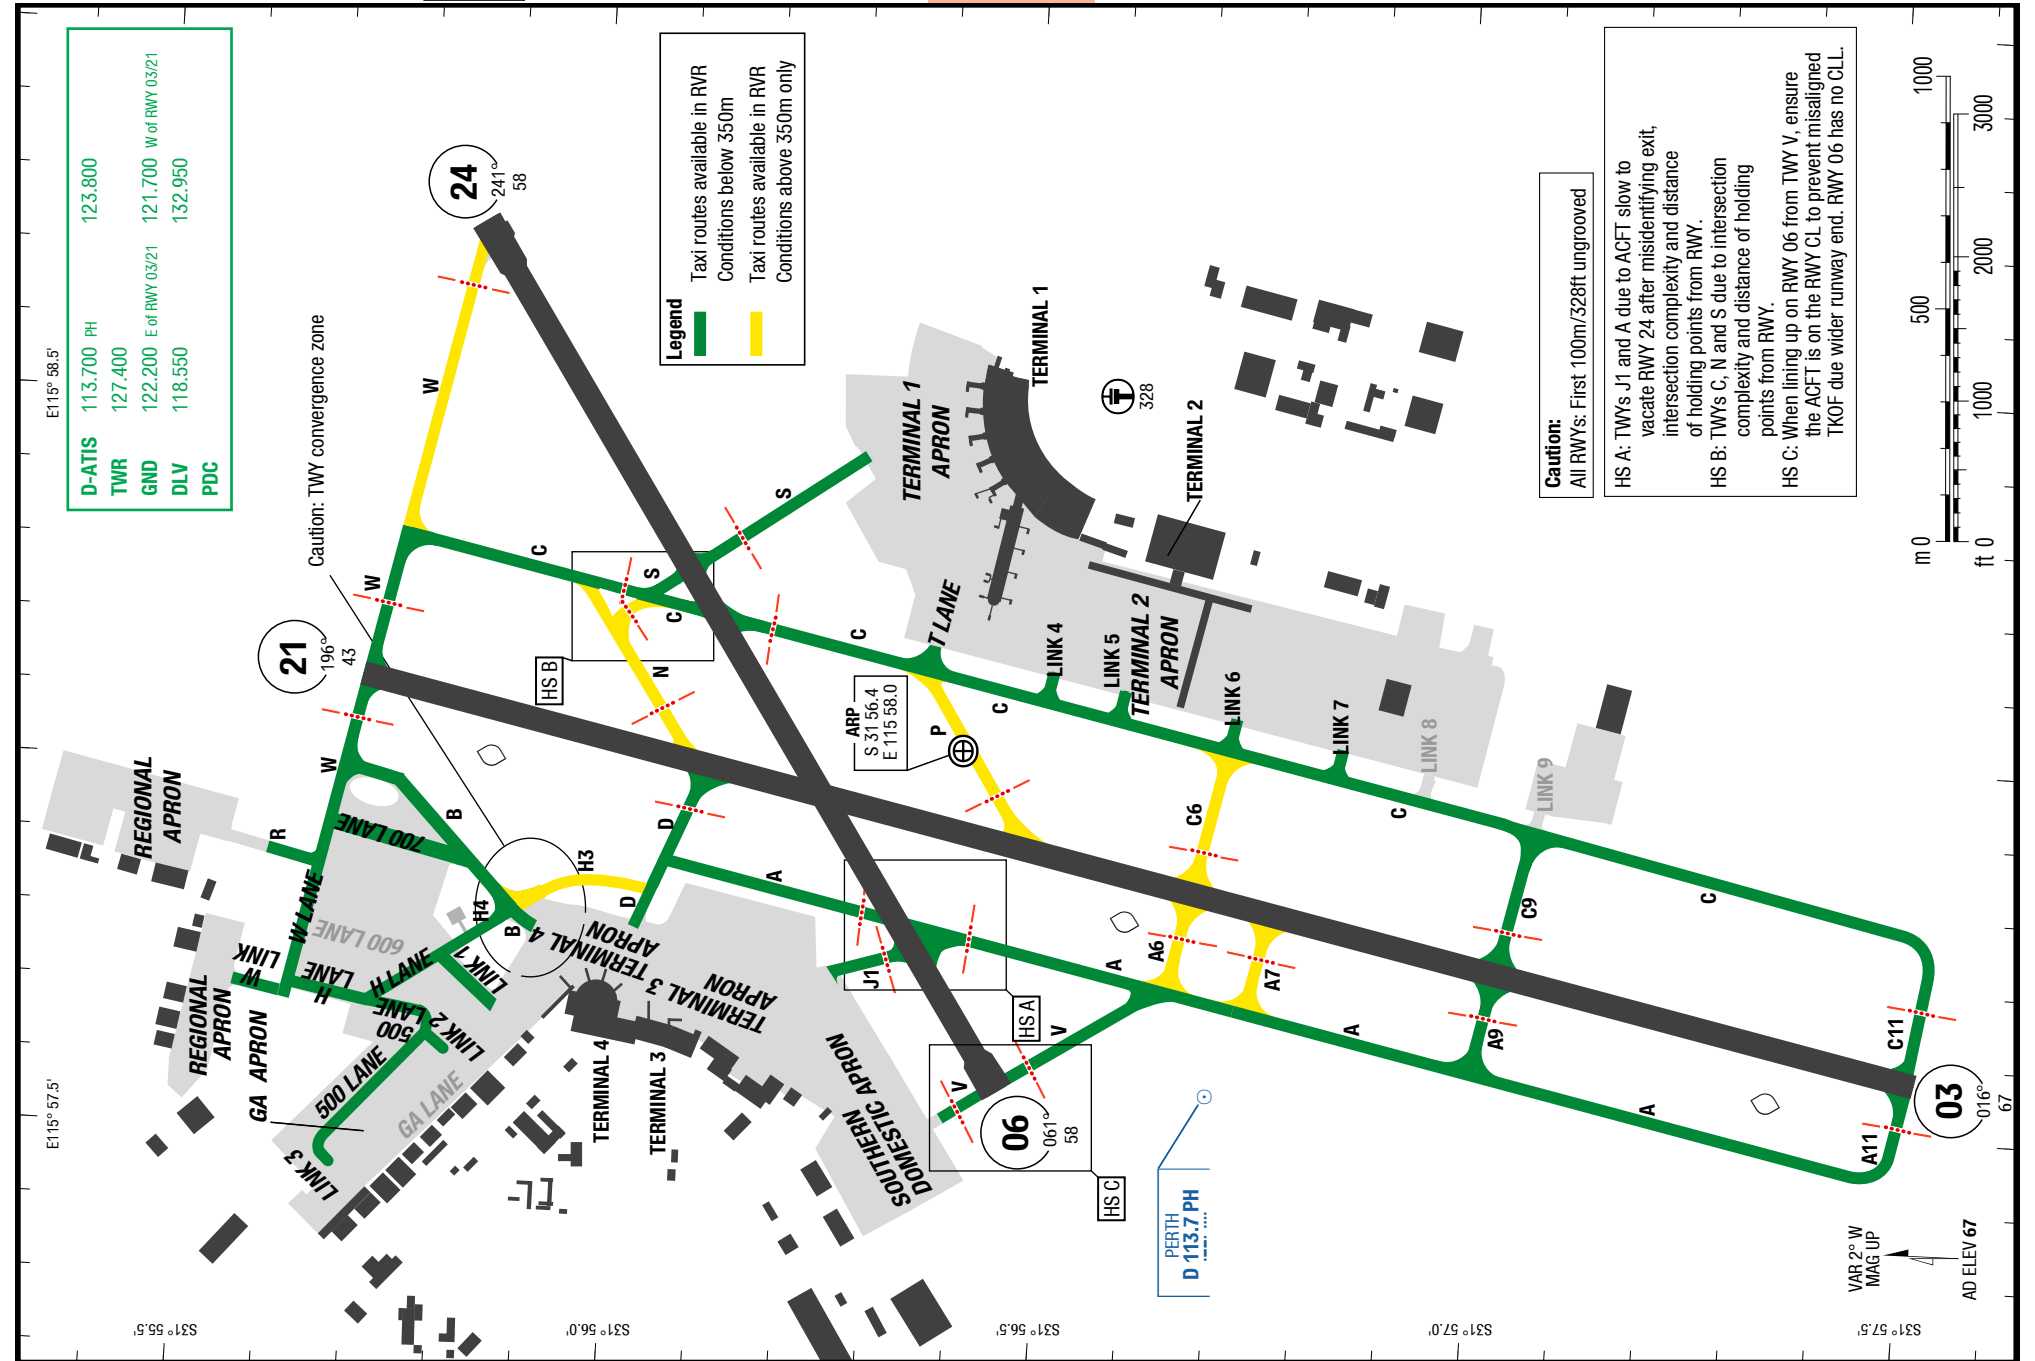


PER-YPPH

AVNEX 5 RNP

SID

SID

AVNEX 5 RNP

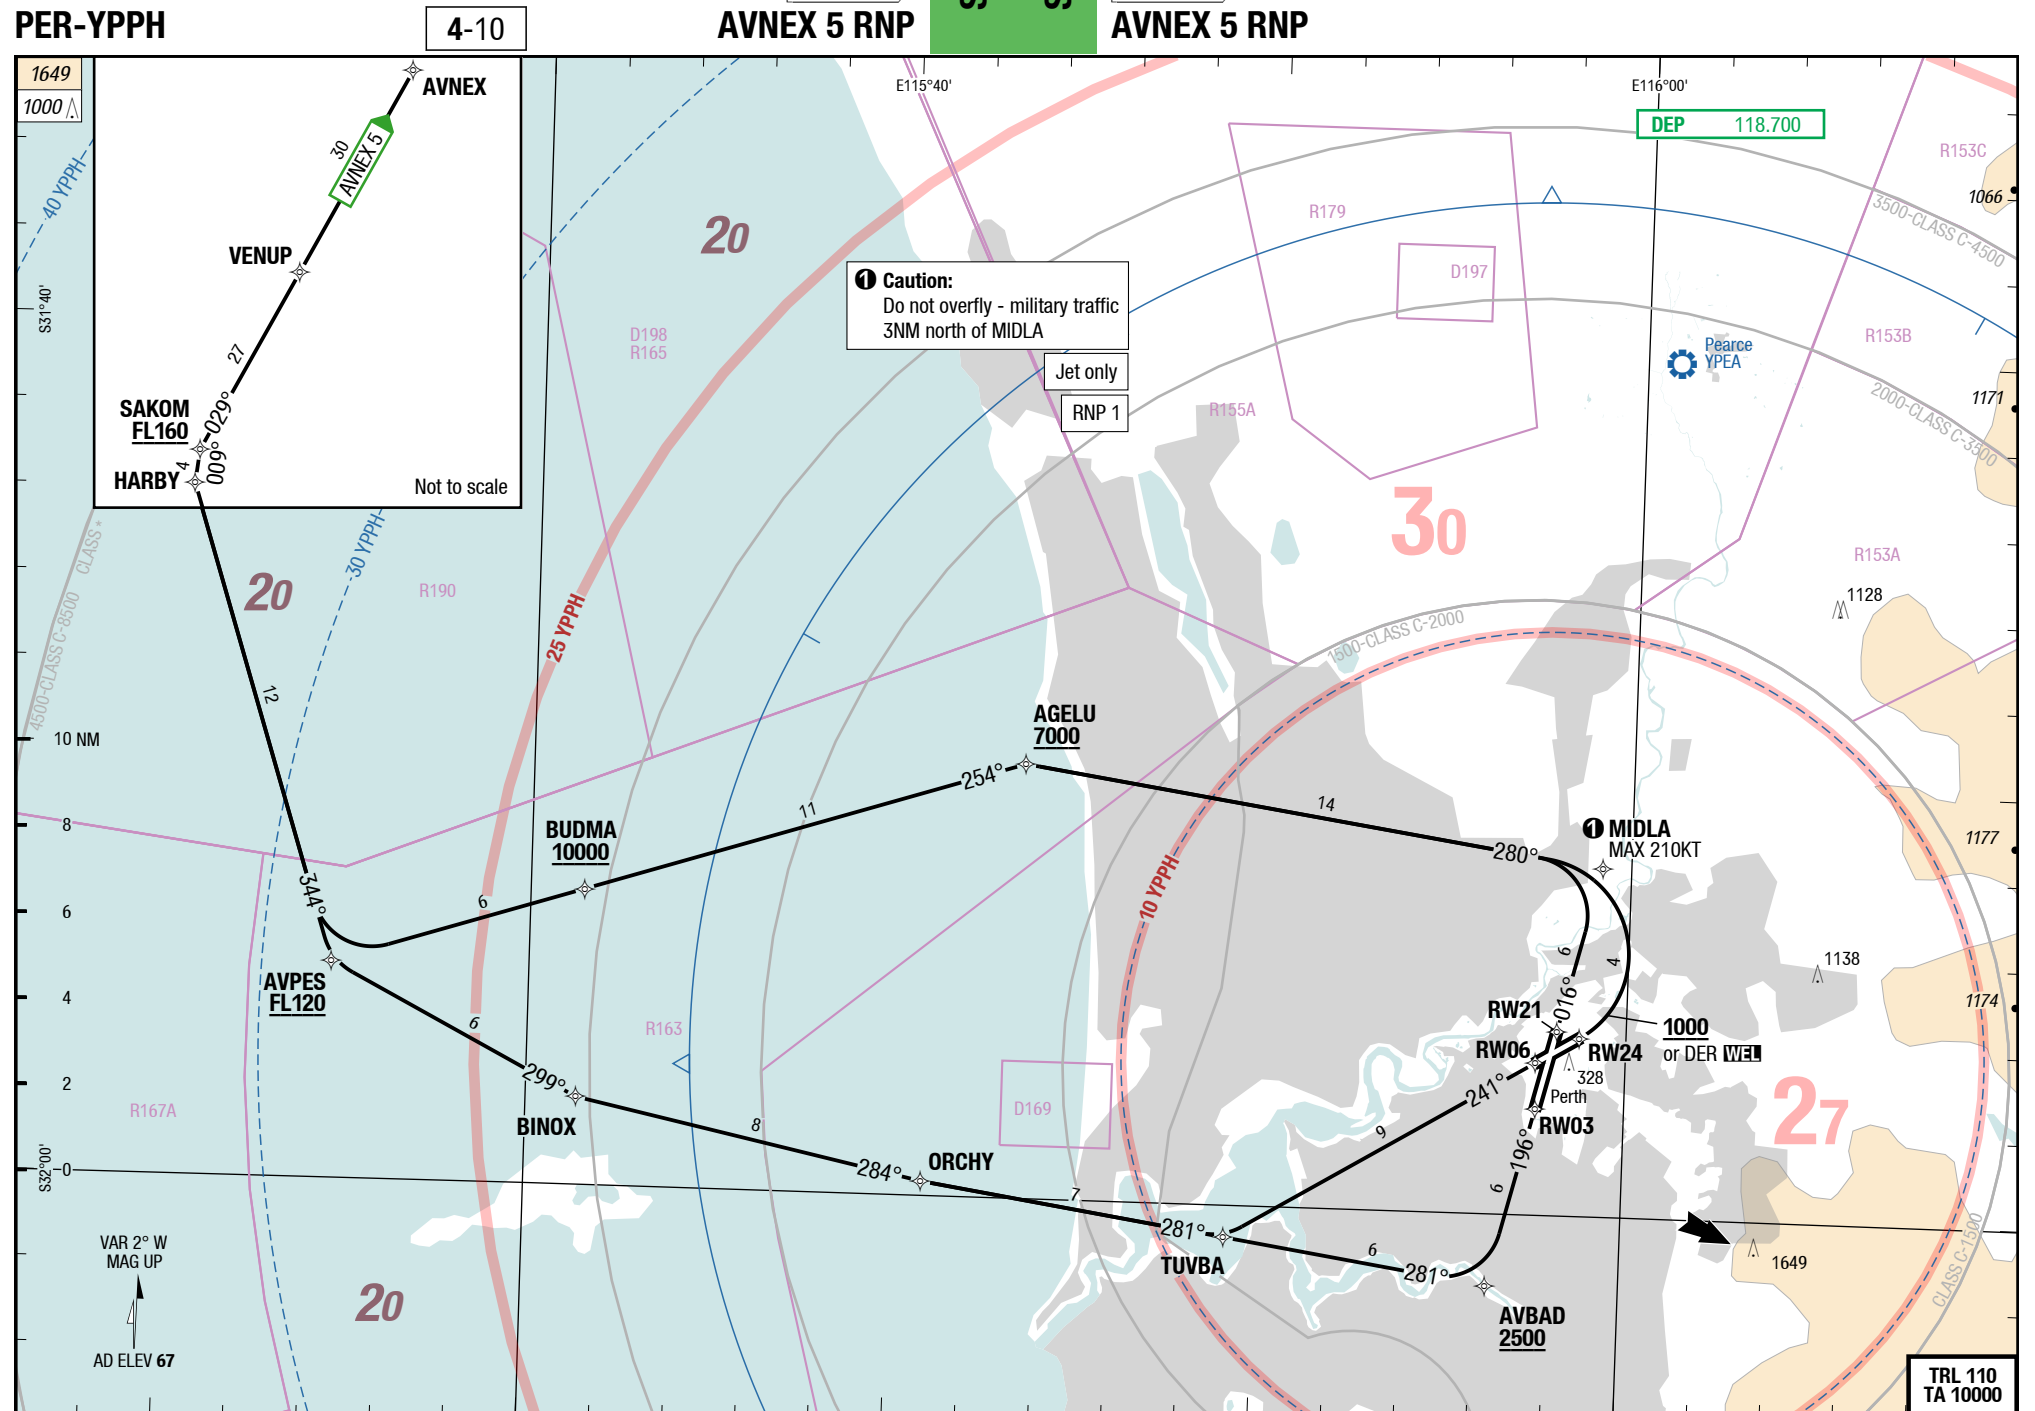

✓ **AirAsia (AirAsia)**

© Lido 2025


PER-YPPH

SID

SID

EKEPO 1 RNP

4-20

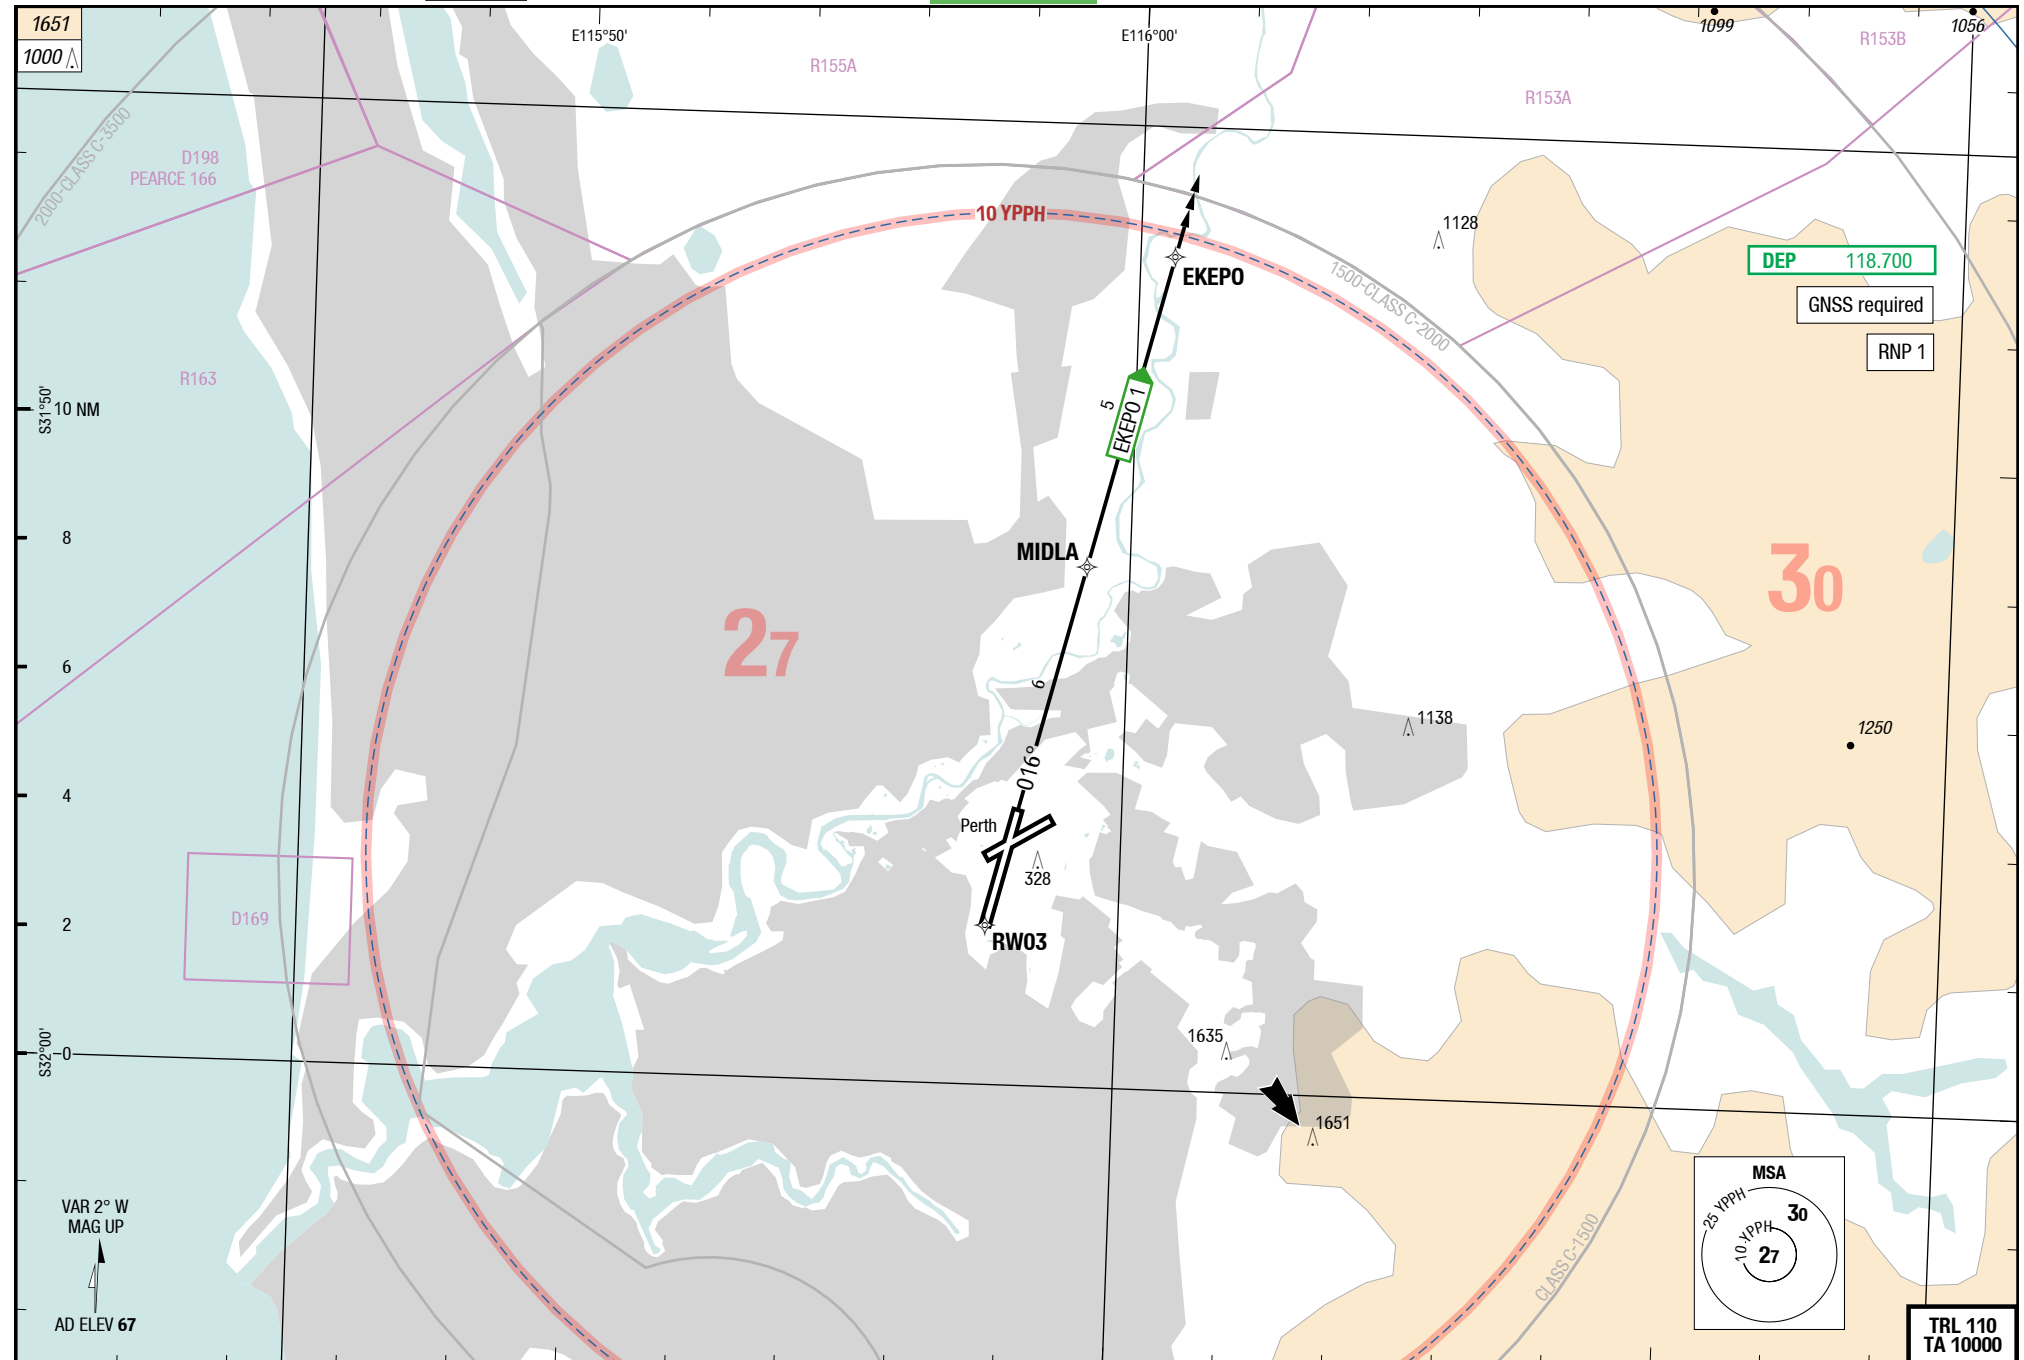EKEPO 1 RNP

✓ **AirAsia (AirAsia)**

© Lido 2025

PER-YPPH

RNP SIDs East


OPEGA 1 RNP

SID

SID

RNP SIDs East

OPEGA 1 RNP

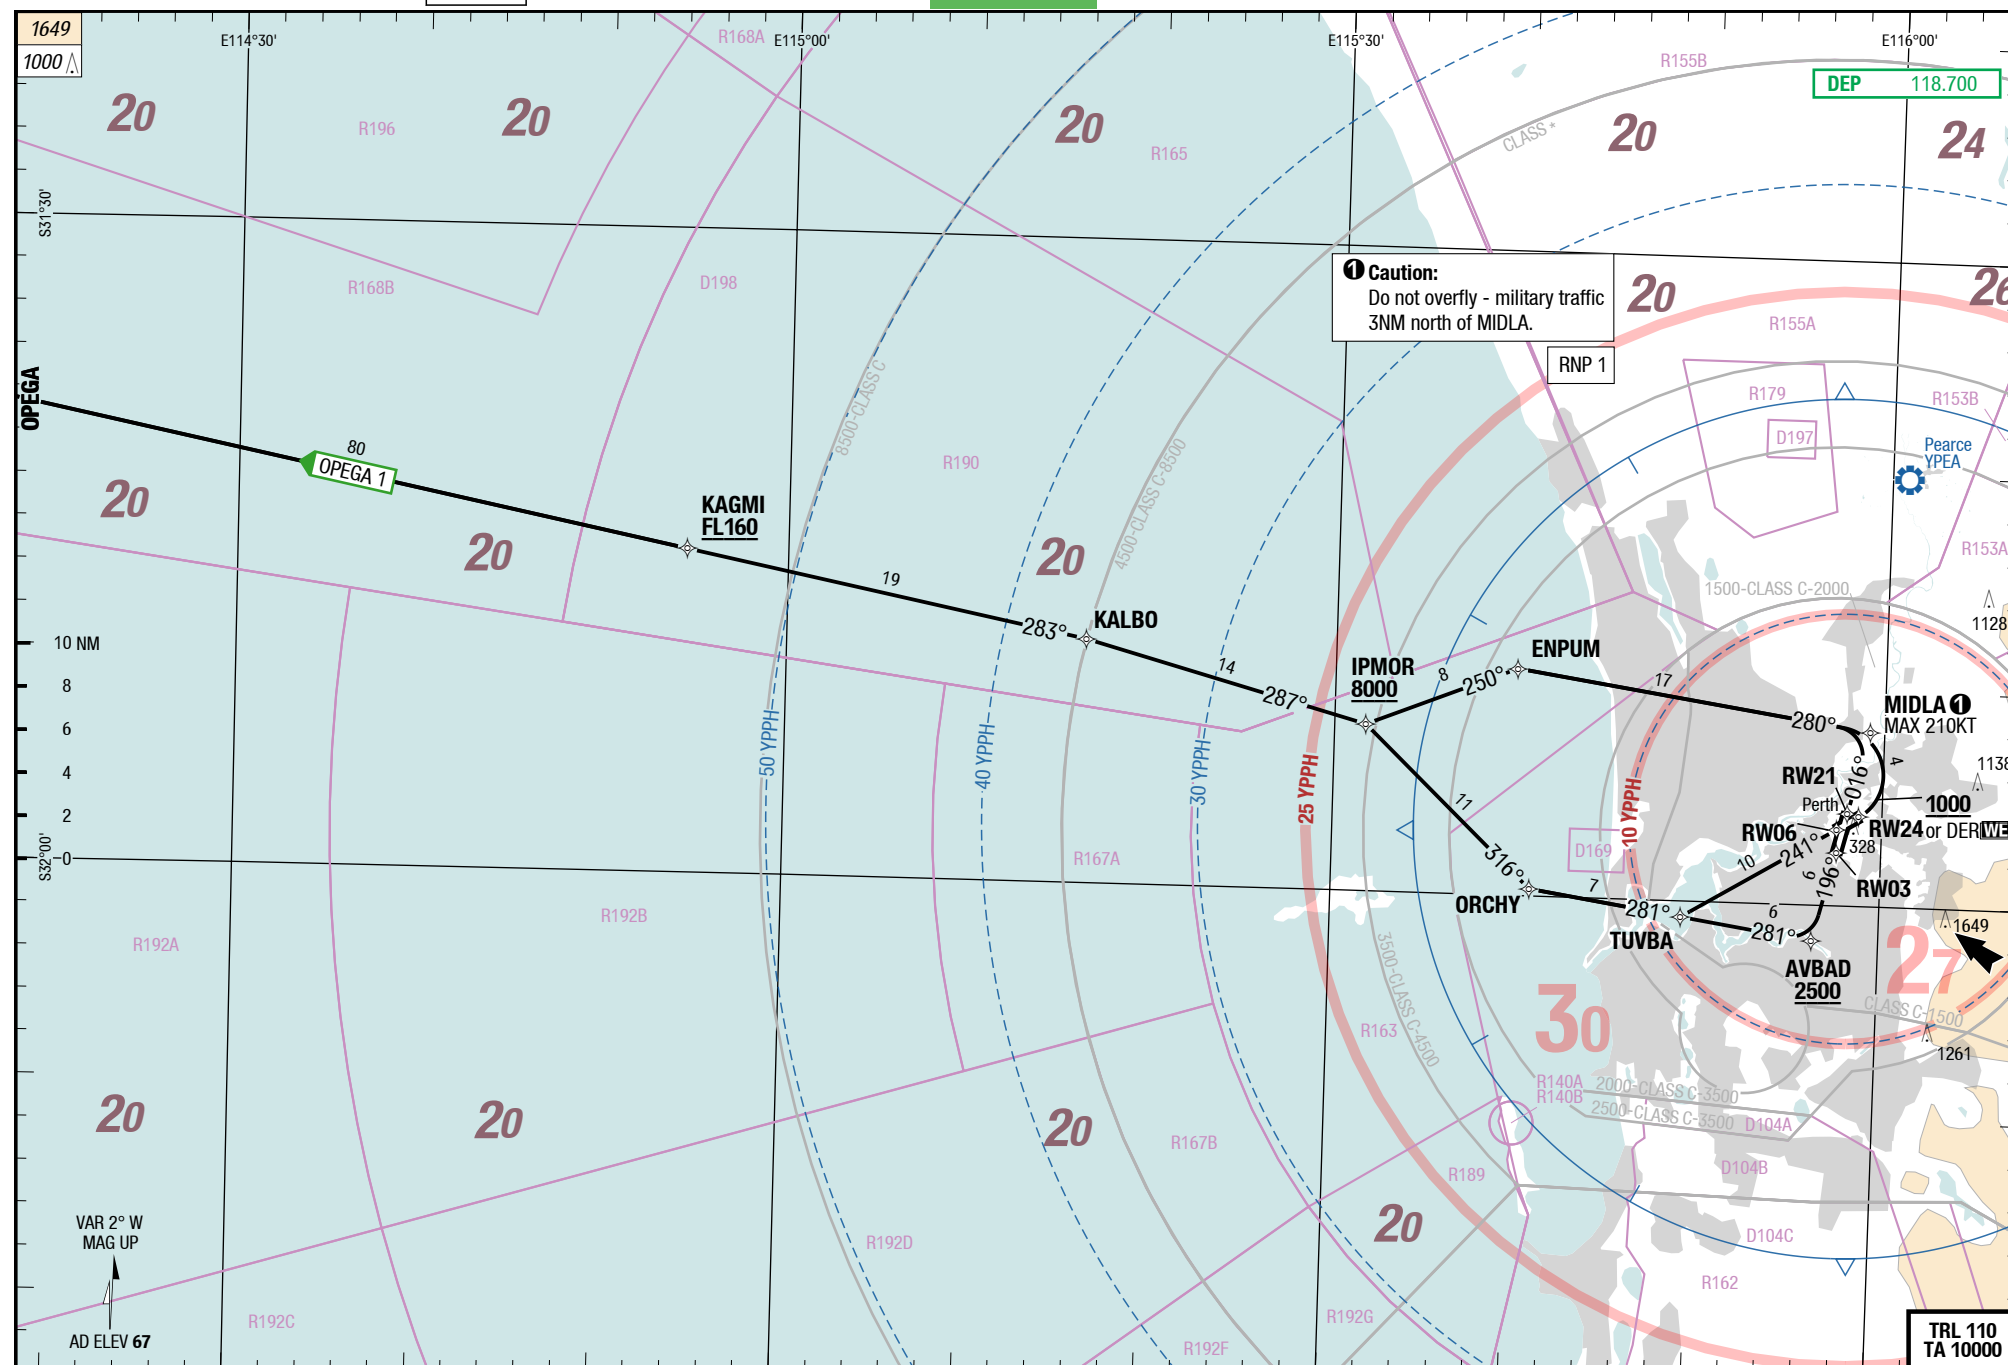

Changes: Page Number

✓ **AirAsia (AirAsia)**

© Lido 2025

05-JUN-2025

Australia **Perth** Perth IntlPerth Intl **Perth** Australia**PER-YPPH**


4-40

RNP SIDs East

SID

SID

RNP SIDs East

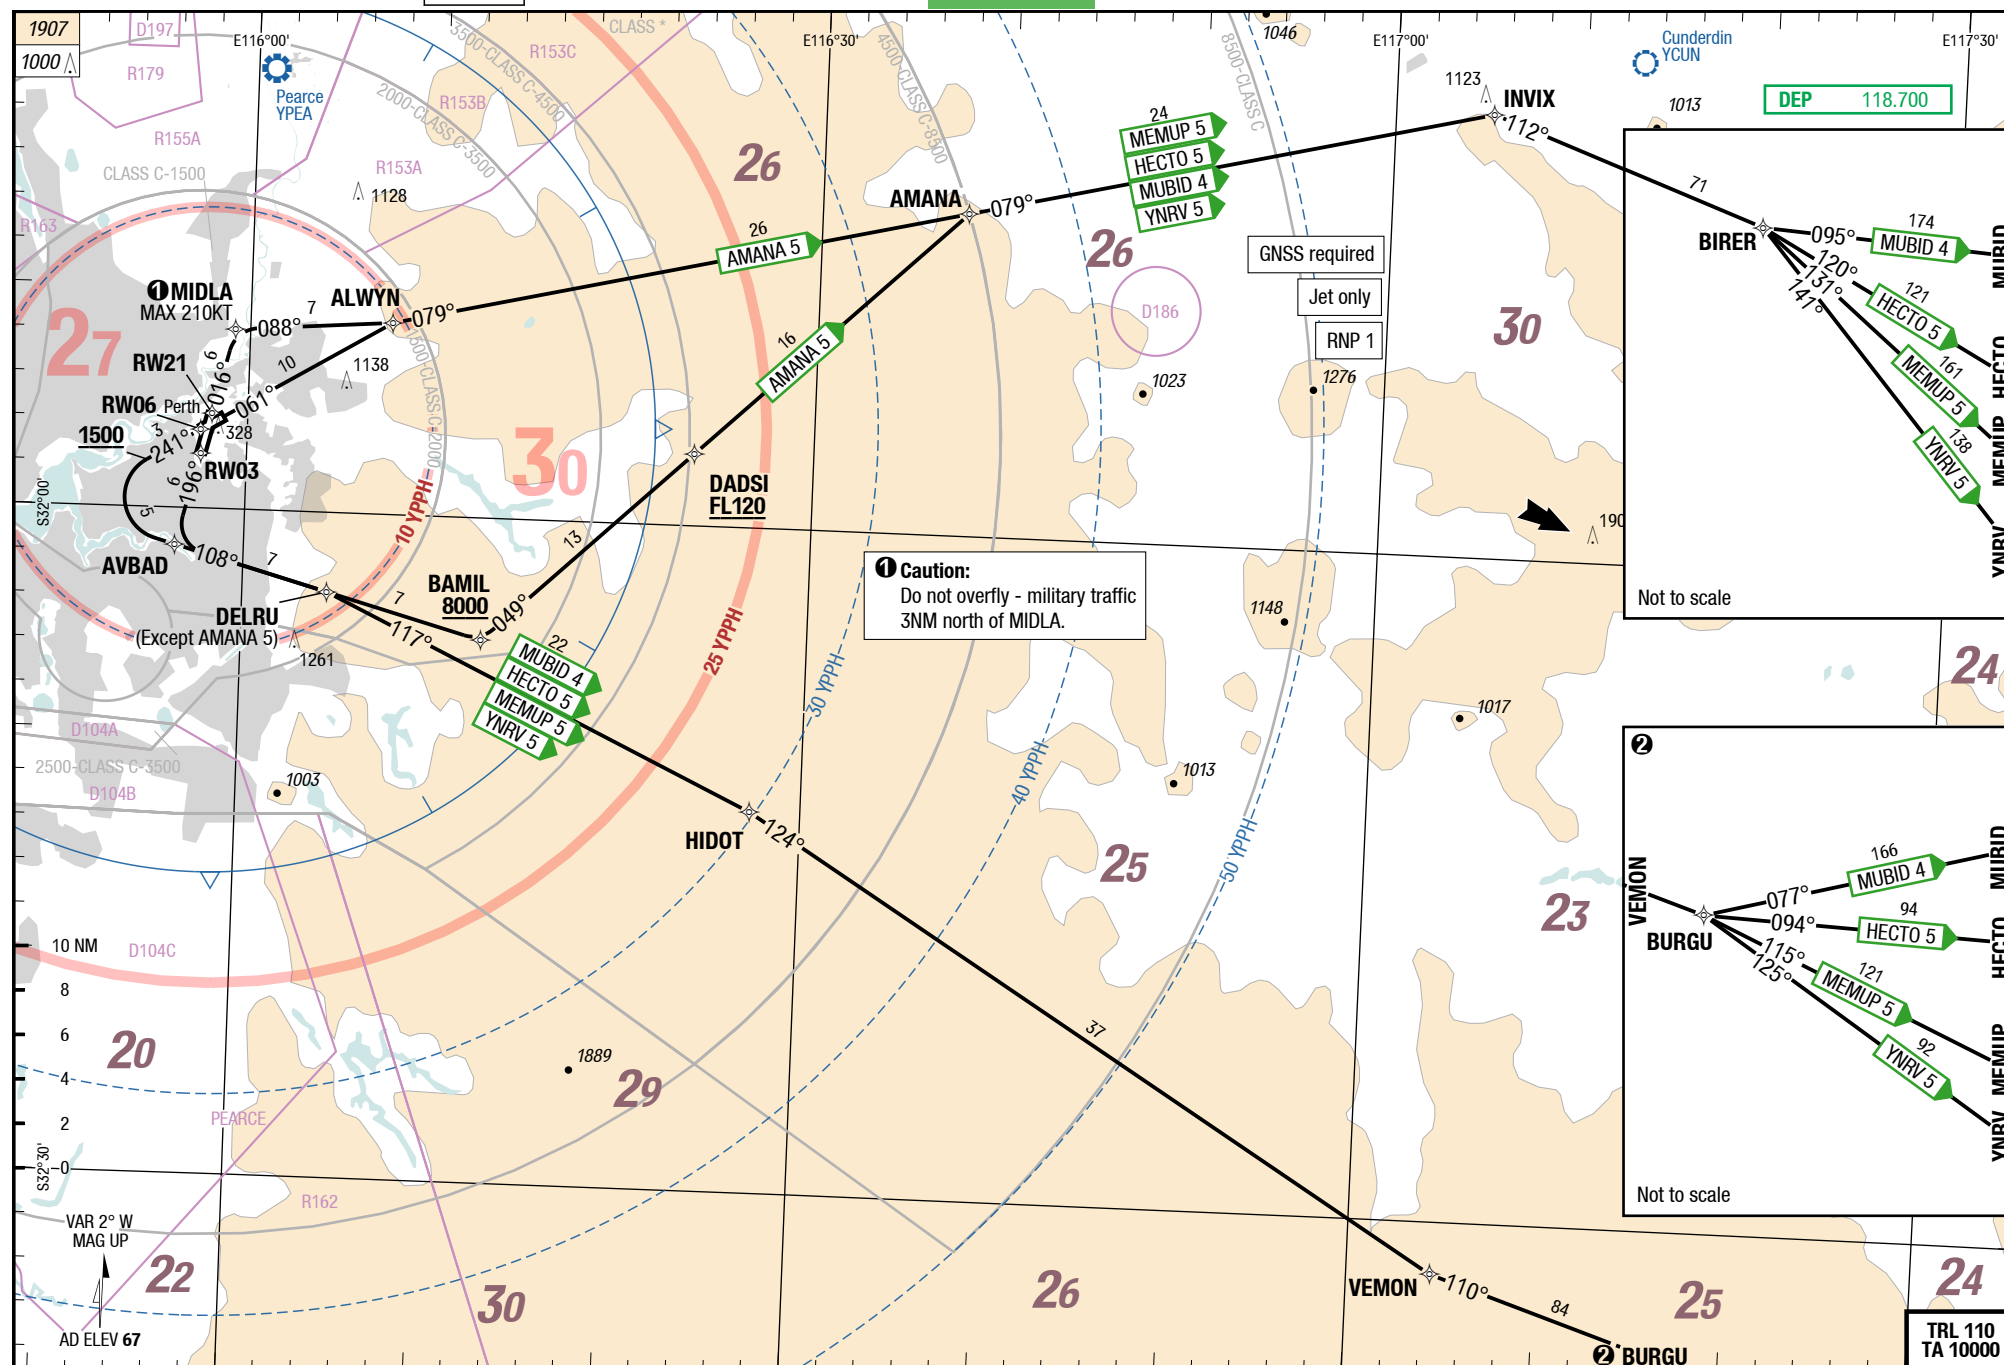

Changes: Page Number

PER-YPPH


RNP SIDs South

SID

SID

RNP SIDs South

4-50

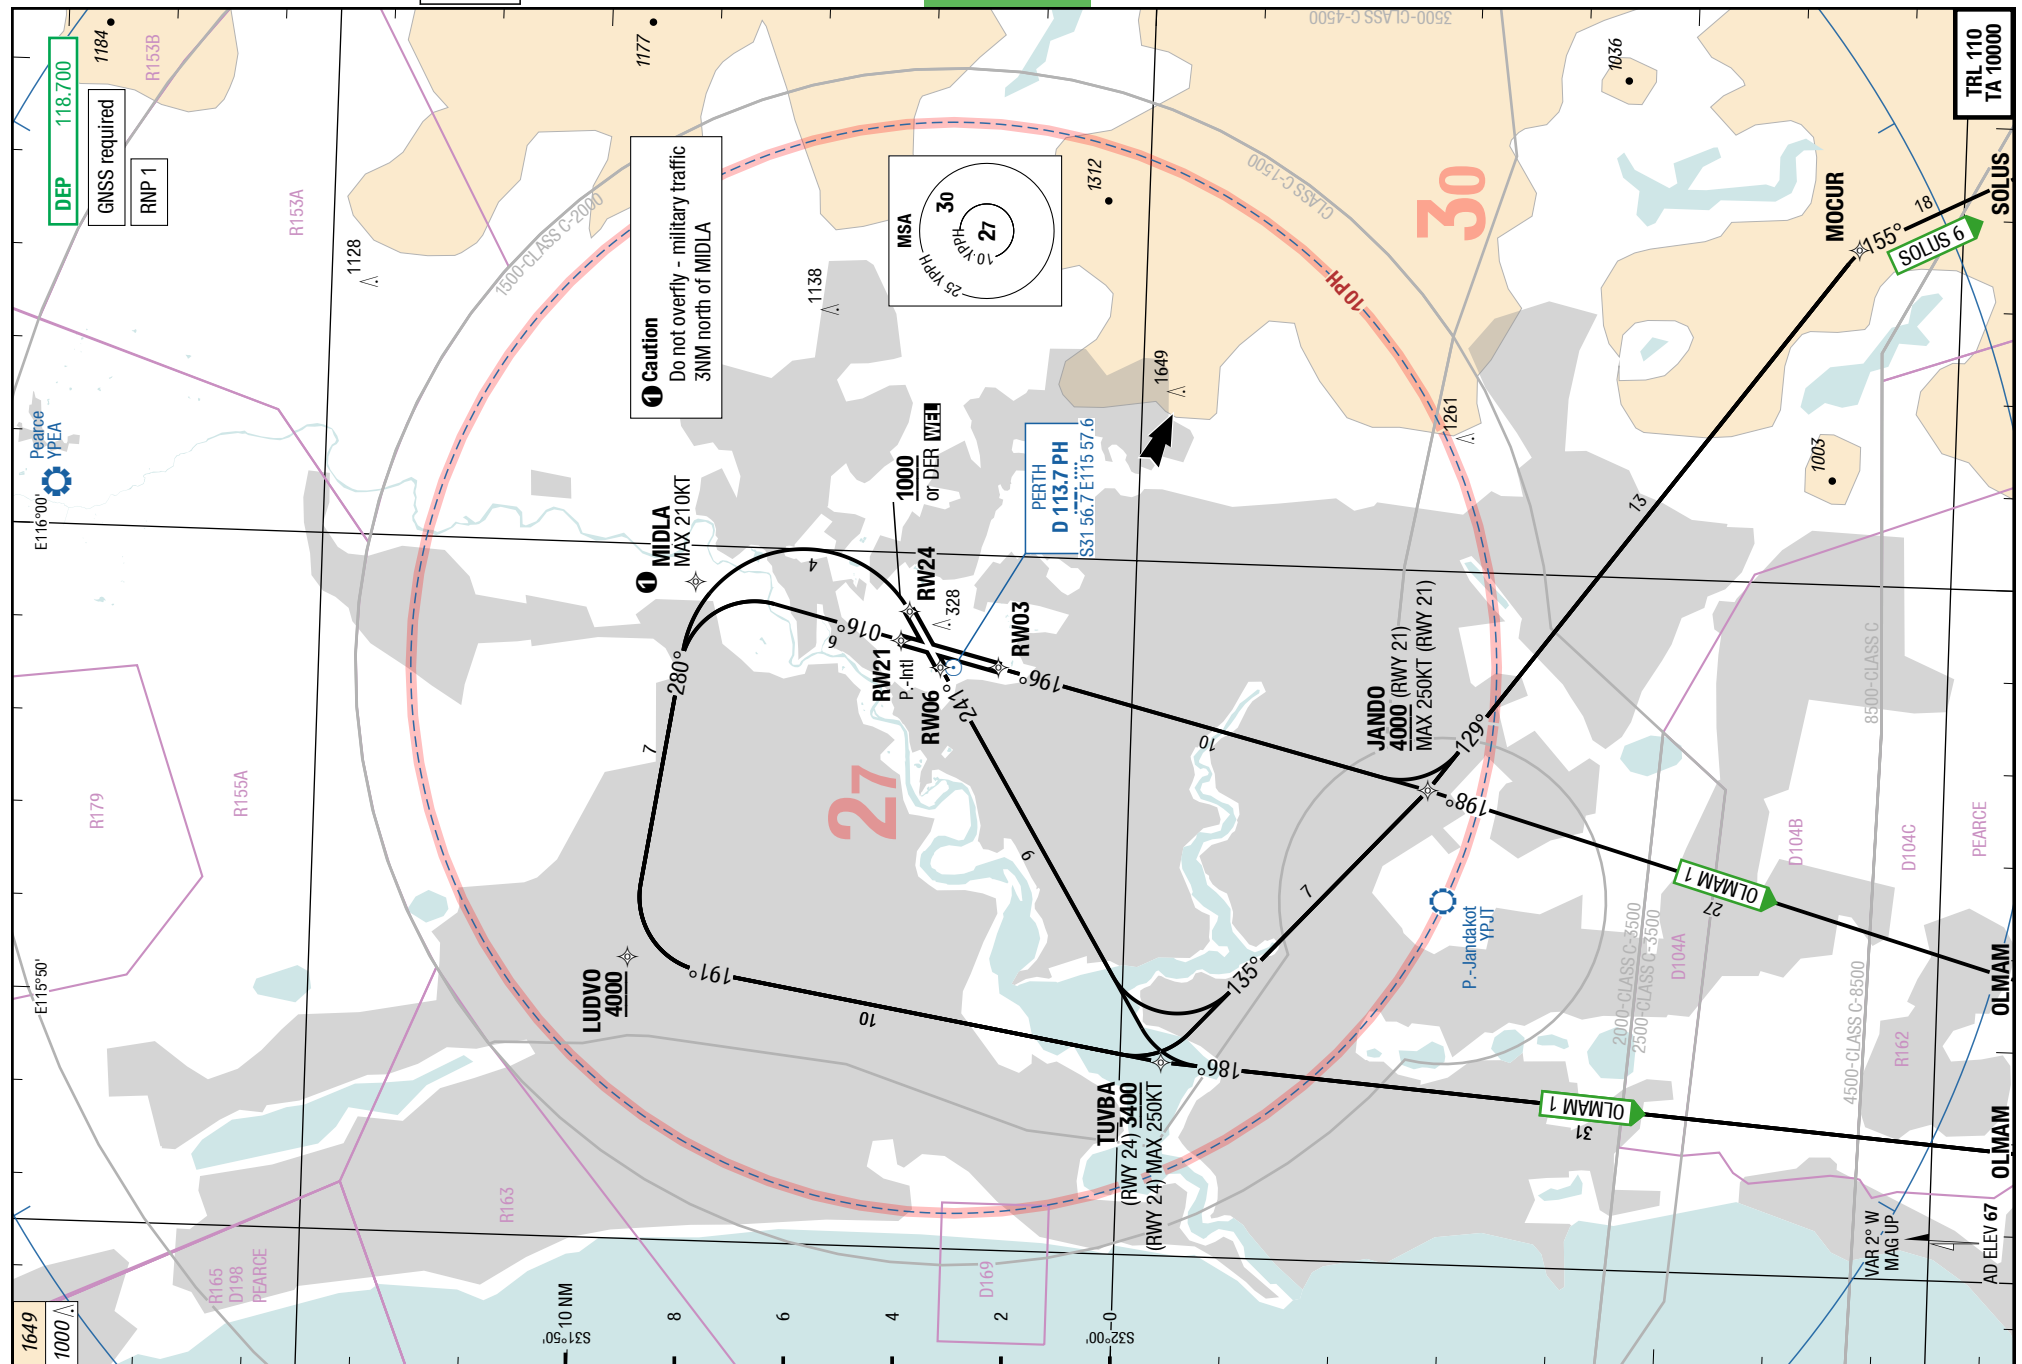

✓ **AirAsia (AirAsia)**

© Lido 2025

05-JUN-2025

PER-YPPH

4-60

Australia **Perth** Perth Intl
SID **PERTH 7 (RADAR)**


SID PERTH 7 (RADAR)

SID

SID

Perth Intl **Perth** Australia
SID PERTH 7 (RADAR)

SID PERTH 7 (RADAR)

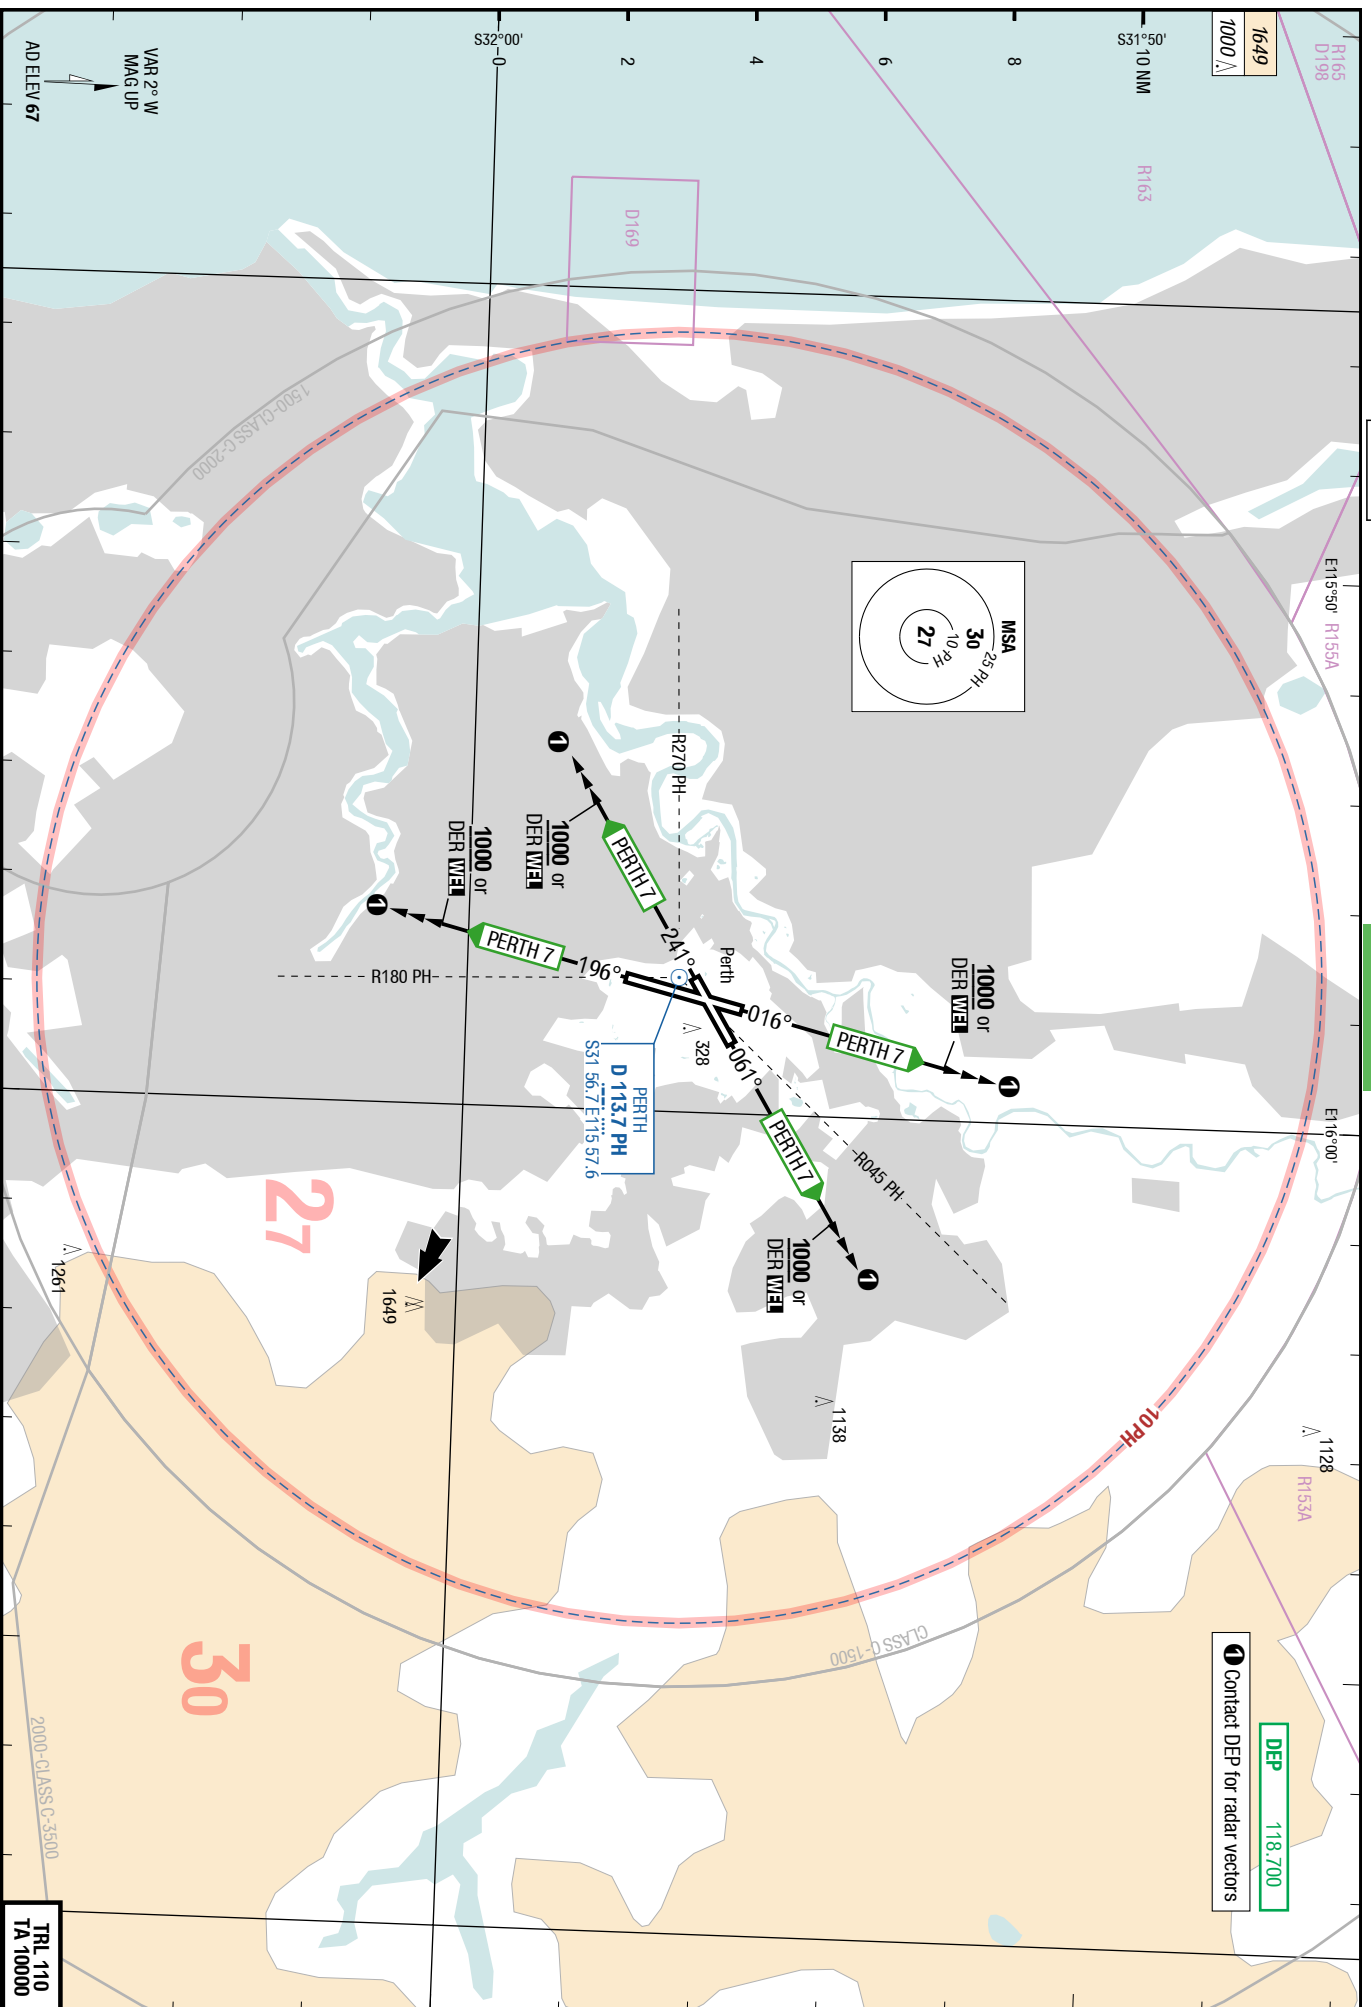

5-10

AVNEX 5

RWYs 03 (016°) / 06 (061°) / 21 (196°)

	GS	120	150	180	210	240	270
3.7%	ft/MIN	500	600	700	800	900	1100
4.0%	ft/MIN	500	700	800	900	1000	1100
4.8%	ft/MIN	600	800	900	1100	1200	1400
5.1%	ft/MIN	700	800	1000	1100	1300	1400
5.7%	ft/MIN	700	900	1100	1300	1400	1600
6.1%	ft/MIN	800	1000	1200	1300	1500	1700
7.0%	ft/MIN	900	1100	1300	1500	1800	2000
10.6%	ft/MIN	1300	1700	2000	2300	2600	2900

DESIGNATOR	ROUTING	ALTITUDES
	Runway 03	
AVNEX 5 (Jet only) 6.1% to FL120 5.1% to FL160 7.0% to AGELU 118.700 ①	RW03 - MIDLA [K210-] - AGELU - BUDMA - AVPES - HARBY - SAKOM - VENUP - AVNEX	AGELU MNM 7000 BUDMA MNM 10000 AVPES MNM FL120 SAKOM MNM FL160
	Runway 06	
AVNEX 5 (Jet only) 4.0% to 2800 6.1% to FL120 5.1% to FL160 118.700 ①	RW06 - DER06 or MNM 1000 WEL - DCT MIDLA [K210-] - AGELU - BUDMA - AVPES - HARBY - SAKOM - VENUP - AVNEX	AGELU MNM 7000 BUDMA MNM 10000 AVPES MNM FL120 SAKOM MNM FL160
	Runway 21	
AVNEX 5 (Jet only) 10.6% to 2500 3.7% to 2800 5.7% to FL120 4.8% to FL160 118.700	RW21 - AVBAD - TUVBA - ORCHY - BINOX - AVPES - HARBY - SAKOM - VENUP - AVNEX	AVBAD MNM 2500 AVPES MNM FL120 SAKOM MNM FL160

① Do not overfly MIDLA due to Military traffic 3NM north of MIDLA.

5-20

AVNEX 5

RWY 24 (241°)

	GS	120	150	180	210	240	270
3.7%	ft/MIN	500	600	700	800	900	1100
4.8%	ft/MIN	600	800	900	1100	1200	1400
6.6%	ft/MIN	900	1100	1300	1500	1700	1900

DESIGNATOR	ROUTING	ALTITUDES
	Runway 24	
AVNEX 5 (Jet only) 3.7% to 2800 6.6% to FL120 4.8% to FL160 118.700	RW24 - TUVBA - ORCHY - BINOX - AVPES - HARBY - SAKOM - VENUP - AVNEX	AVPES MNM FL120 SAKOM MNM FL160

EKEPO 1 RWY 03 (016°)		
DESIGNATOR	ROUTING	ALTITUDES
	Runway 03	
EKEPO 1 118.700	RW03 - MIDLA - EKEPO - expect VECTORS	

PER-YPPH

5-40

OPEGA 1 RNP

OPEGA 1

RWYs 03 (016°) / 06 (061°) / 21 (196°) / 24 (241°)

	GS	120	150	180	210	240	270
3.7%	ft/MIN	500	600	700	800	900	1100
4.0%	ft/MIN	500	700	800	900	1000	1100
4.7%	ft/MIN	600	800	900	1000	1200	1300

DESIGNATOR	ROUTING	ALTITUDES
	Runway 03	
OPEGA 1 4.7% to 8000 118.700 ①	RW03 - MIDLA [K210-] - ENPUM - IPMOR - KALBO - KAGMI - OPEGA	IPMOR MNM 8000 KAGMI MNM FL160
	Runway 06	
OPEGA 1 4.7% to 8000 4.0% to 2800 118.700 ①	RW06 - DER06 or MNM 1000 WEL - DCT MIDLA [K210-] - ENPUM - IPMOR - KALBO - KAGMI - OPEGA	IPMOR MNM 8000 KAGMI MNM FL160
	Runway 21	
OPEGA 1 4.7% to 8000 3.7% to 2800 118.700	RW21 - AVBAD - TUVBA - ORCHY - IPMOR - KALBO - KAGMI - OPEGA	AVBAD MNM 2500 IPMOR MNM 8000 KAGMI MNM FL160
	Runway 24	
OPEGA 1 4.7% to 8000 3.7% to 2800 118.700	RW24 - TUVBA - ORCHY - IPMOR - KALBO - KAGMI - OPEGA	IPMOR MNM 8000 KAGMI MNM FL160

① Do not overfly MIDLA due to Military traffic 3NM north of MIDLA.

Changes: Nil

AMANA 5 / HECTO 5 / MEMUP 5 / MUBID 4 / RAVENSTHORPE 5

RWYs 03 (016°) / 06 (061°)

	GS	120	150	180	210	240	270
4.0%	ft/MIN	500	700	800	900	1000	1100

DESIGNATOR	ROUTING	ALTITUDES
	Runway 03	
AMANA 5 (Jet only) 4.0% to 2800 118.700 ①	RW03 - MIDLA [K210-] - ALWYN - AMANA	
HECTO 5 (Jet only) 4.0% to 2800 118.700 ①	RW03 - MIDLA [K210-] - ALWYN - AMANA - INVIX - BIRER - HECTO	
MEMUP 5 (Jet only) 4.0% to 2800 118.700 ①	RW03 - MIDLA [K210-] - ALWYN - AMANA - INVIX - BIRER - MEMUP	
MUBID 4 (Jet only) 4.0% to 2800 118.700 ①	RW03 - MIDLA [K210-] - ALWYN - AMANA - INVIX - BIRER - MUBID	
RAVENSTHORPE 5 YNRV 5 (Jet only) 4.0% to 2800 118.700 ①	RW03 - MIDLA [K210-] - ALWYN - AMANA - INVIX - BIRER - YNRV	
	Runway 06	
AMANA 5 (Jet only) 4.0% to 2800 118.700	RW06 - ALWYN - AMANA	
HECTO 5 (Jet only) 4.0% to 2800 118.700	RW06 - ALWYN - AMANA - INVIX - BIRER - HECTO	

① Do not overfly MIDLA due to Military traffic 3NM north of MIDLA.

PER-YPPH

5-60

RNP SIDs East

MEMUP 5 / MUBID 4 / RAVENSTHORPE 5 / AMANA 5 / HECTO 5

RWYs 06 (061°) / 21 (196°)

	GS	120	150	180	210	240	270
4.0%	ft/MIN	500	700	800	900	1000	1100

DESIGNATOR	ROUTING	ALTITUDES
	Runway 06	
MEMUP 5 (Jet only) 4.0% to 2800 118.700	RW06 - ALWYN - AMANA - INVIX - BIRER - MEMUP	
MUBID 4 (Jet only) 4.0% to 2800 118.700	RW06 - ALWYN - AMANA - INVIX - BIRER - MUBID	
RAVENSTHORPE 5 YNRV 5 (Jet only) 4.0% to 2800 118.700	RW06 - ALWYN - AMANA - INVIX - BIRER - YNRV	
	Runway 21	
AMANA 5 (Jet only) 4.0% to 2800 118.700	RW21 - AVBAD - BAMIL - DADSI - AMANA	BAMIL MNM 8000 DADSI MNM FL120
HECTO 5 (Jet only) 4.0% to 2800 118.700	RW21 - AVBAD - DELRU - HIDOT - VEMON - BURGU - HECTO	
MEMUP 5 (Jet only) 4.0% to 2800 118.700	RW21 - AVBAD - DELRU - HIDOT - VEMON - BURGU - MEMUP	
MUBID 4 (Jet only) 4.0% to 2800 118.700	RW21 - AVBAD - DELRU - HIDOT - VEMON - BURGU - MUBID	
RAVENSTHORPE 5 YNRV 5 (Jet only) 4.0% to 2800 118.700	RW21 - AVBAD - DELRU - HIDOT - VEMON - BURGU - YNRV	

PER-YPPH

5-70

RNP SIDs East

SIDPT

AMANA 5 / HECTO 5 / MEMUP 5 / MUBID 4 / RAVENSTHORPE 5

RWY 24 (241°)

	GS	120	150	180	210	240	270
4.0%	ft/MIN	500	700	800	900	1000	1100

DESIGNATOR	ROUTING	ALTITUDES
	Runway 24	
AMANA 5 (Jet only) 4.0% to 2800 118.700	241° [A1500+] - DCT AVBAD - BAMIL - DADSI - AMANA	BAMIL MNM 8000 DADSI MNM FL120
HECTO 5 (Jet only) 4.0% to 2800 118.700	241° [A1500+ ;L] - DCT AVBAD - DELRU - HIDOT - VEMON - BURGU - HECTO	
MEMUP 5 (Jet only) 4.0% to 2800 118.700	241° [A1500+ ;L] - DCT AVBAD - DELRU - HIDOT - VEMON - BURGU - MEMUP	
MUBID 4 (Jet only) 4.0% to 2800 118.700	241° [A1500+ ;L] - DCT AVBAD - DELRU - HIDOT - VEMON - BURGU - MUBID	
RAVENSTHORPE 5 YNRV 5 (Jet only) 4.0% to 2800 118.700	241° [A1500+ ;L] - DCT AVBAD - DELRU - HIDOT - VEMON - BURGU - YNRV	

PER-YPPH

5-80

RNP SIDs South

OLMAM 1 / SOLUS 6

RWYs 03 (016°) / 06 (061°) / 21 (196°) / 24 (241°)

	GS	120	150	180	210	240	270
3.7%	ft/MIN	500	600	700	800	900	1100
4.0%	ft/MIN	500	700	800	900	1000	1100
6.6%	ft/MIN	900	1100	1300	1500	1700	1900
7.9%	ft/MIN	1000	1300	1500	1700	2000	2200

DESIGNATOR	ROUTING	ALTITUDES
	Runway 03	
OLMAM 1 118.700 ①	RW03 - MIDLA [K210-] - LUDVO - TUVBA - OLMAM	LUDVO MNM 4000
SOLUS 6 118.700 ①	RW03 - MIDLA [K210-] - LUDVO - TUVBA - JANDO - MOCUR - SOLUS	LUDVO MNM 4000
	Runway 06	
OLMAM 1 4.0% to 2800 118.700 ①	RW06 - DER06 or MNM 1000 WEL - DCT MIDLA [K210-] - LUDVO - TUVBA - OLMAM	LUDVO MNM 4000
SOLUS 6 4.0% to 2800 118.700 ①	RW06 - DER06 or MNM 1000 WEL - DCT MIDLA [K210-] - LUDVO - TUVBA - JANDO - MOCUR - SOLUS	LUDVO MNM 4000
	Runway 21	
OLMAM 1 3.7% to 2800 7.9% to 4000 118.700	RW21 - JANDO [K250-] - OLMAM	JANDO MNM 4000
SOLUS 6 3.7% to 2800 7.9% to 4000 118.700	RW21 - JANDO [K250-] - MOCUR - SOLUS	JANDO MNM 4000
	Runway 24	
OLMAM 1 3.7% to 2800 6.6% to 3400 118.700	RW24 - TUVBA [K250-] - OLMAM	TUVBA MNM 3400

① Do not overfly MIDLA due to Military traffic 3NM north of MIDLA.

PER-YPPH

5-90

RNP SIDs South

SOLUS 6 RWY 24 (241°)							
	GS	120	150	180	210	240	270
3.7%	ft/MIN	500	600	700	800	900	1100
6.6%	ft/MIN	900	1100	1300	1500	1700	1900
DESIGNATOR	ROUTING					ALTITUDES	
	Runway 24						
SOLUS 6 3.7% to 2800 6.6% to 3400 118.700	RW24 - TUVBA [K250-] - JANDO - MOCUR - SOLUS					TUVBA MNM 3400	

PER-YPPH

5-100

SID PERTH 7 (RADAR)

PERTH 7

RWYs 03 (016°) / 06 (061°) / 21 (196°) / 24 (241°)

	GS	120	150	180	210	240	270
3.7%	ft/MIN	500	600	700	800	900	1100
4.0%	ft/MIN	500	700	800	900	1000	1100


DESIGNATOR	ROUTING	ALTITUDES
	Runway 03	
PERTH 7 RADAR 118.700 ①	016° to MNM 1000 or DER, whichever is later, turn to assigned HDG or track	
	Runway 06	
PERTH 7 RADAR 4.0% (R045 PH CW to R180 PH) 118.700 ①	061° to MNM 1000 or DER, whichever is later, turn to assigned HDG or track	
	Runway 21	
PERTH 7 RADAR 3.7% (R180 PH CW to R270 PH) 118.700 ①	196° to MNM 1000 or DER, whichever is later, turn to assigned HDG or track	
	Runway 24	
PERTH 7 RADAR 3.7% (R180 PH CW to R270 PH) 118.700 ①	241° to MNM 1000 or DER, whichever is later, turn to assigned HDG or track	


① Contact DEP for radar vectors

Perth Intl **Perth** Australia

RNP STAR JULIM

RNP STAR IPMOR 2A

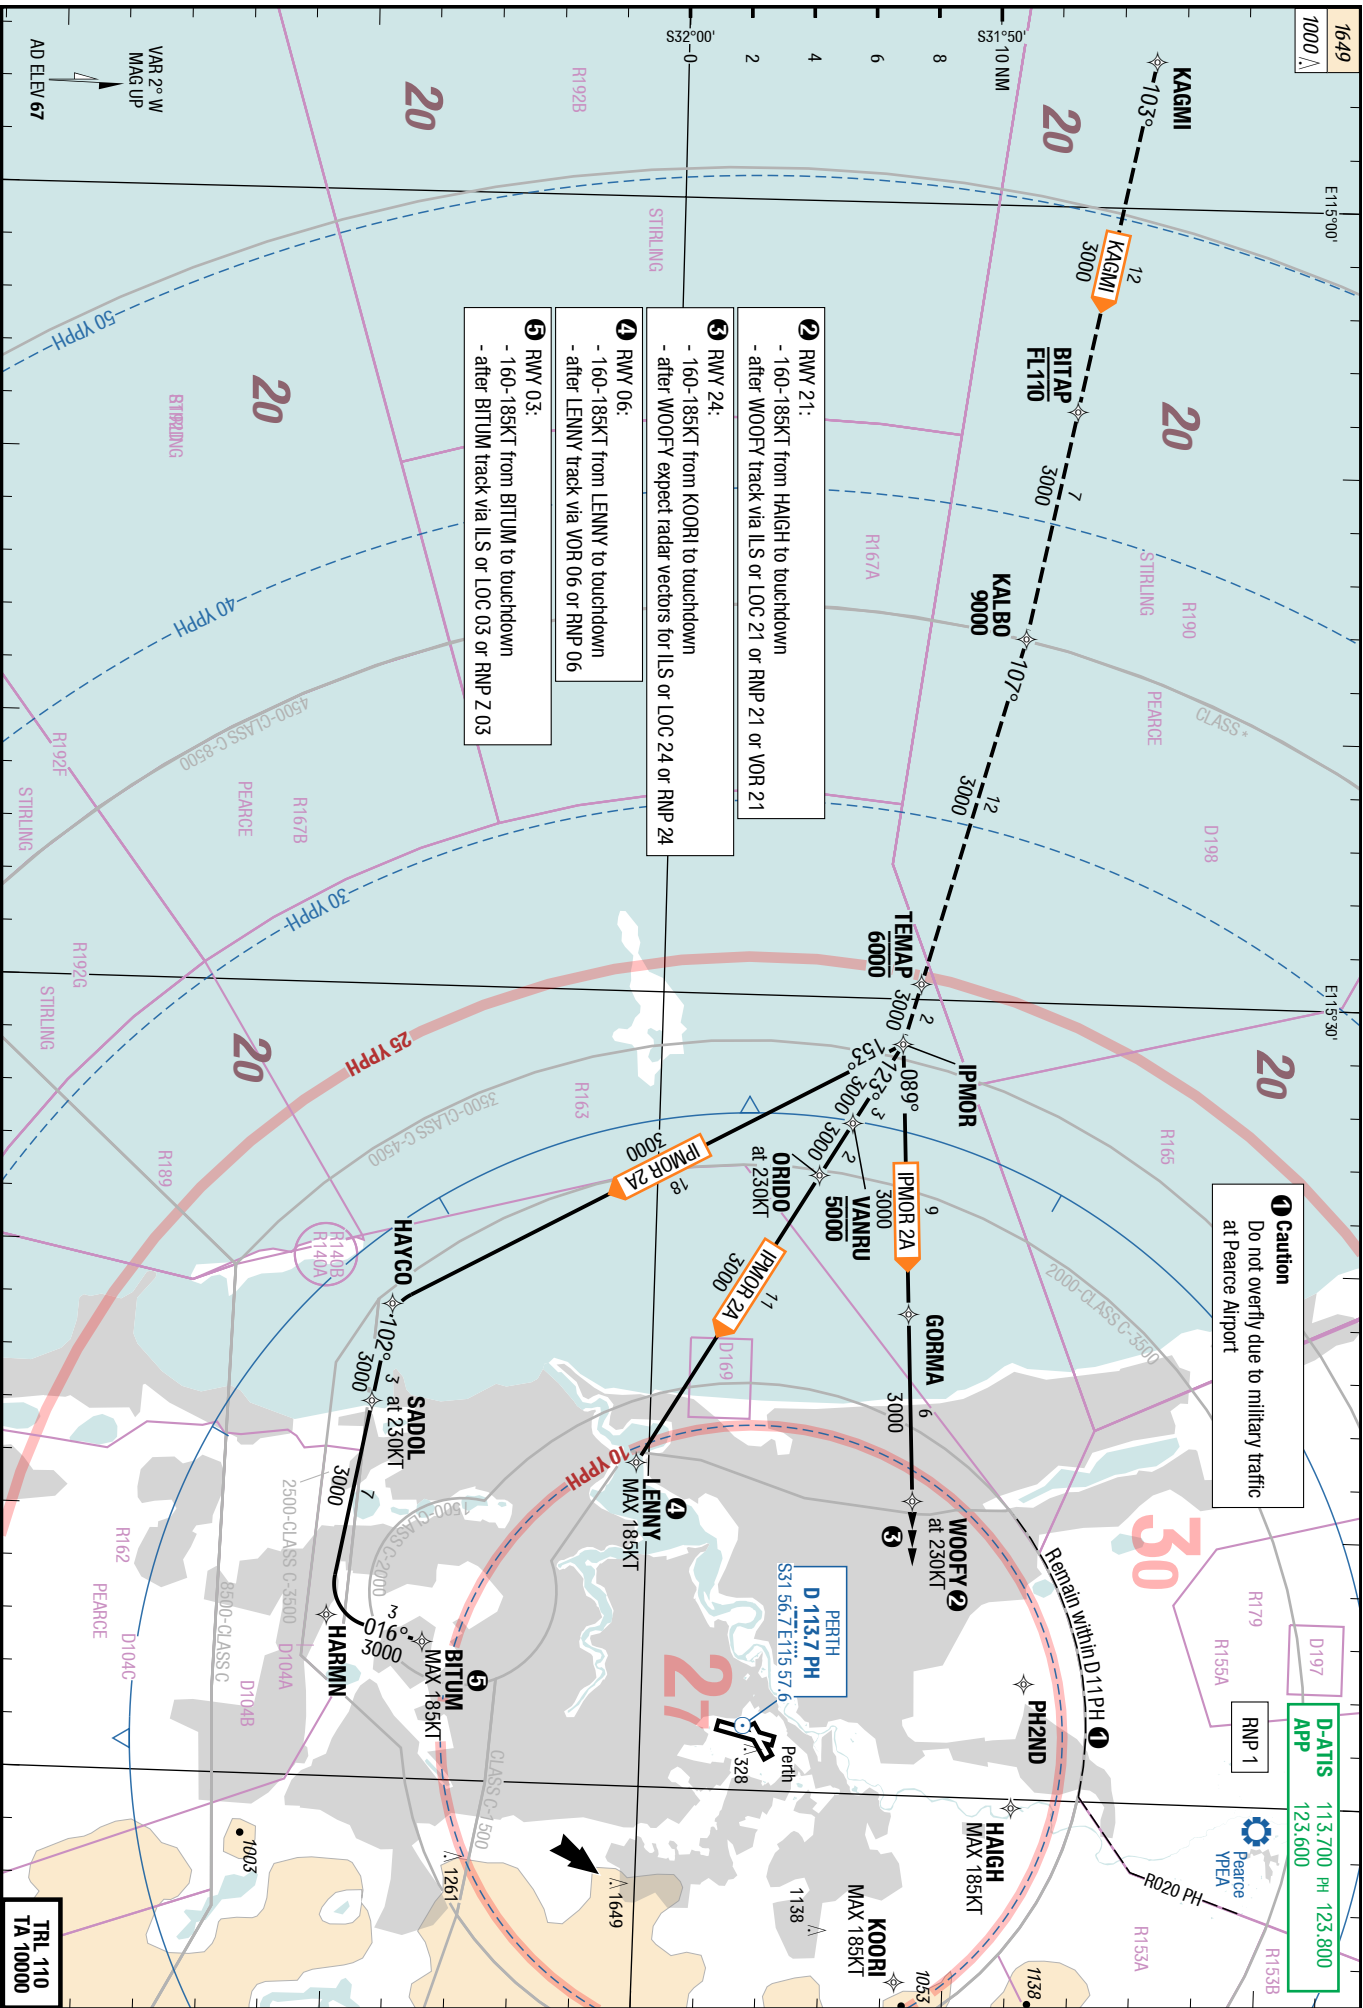

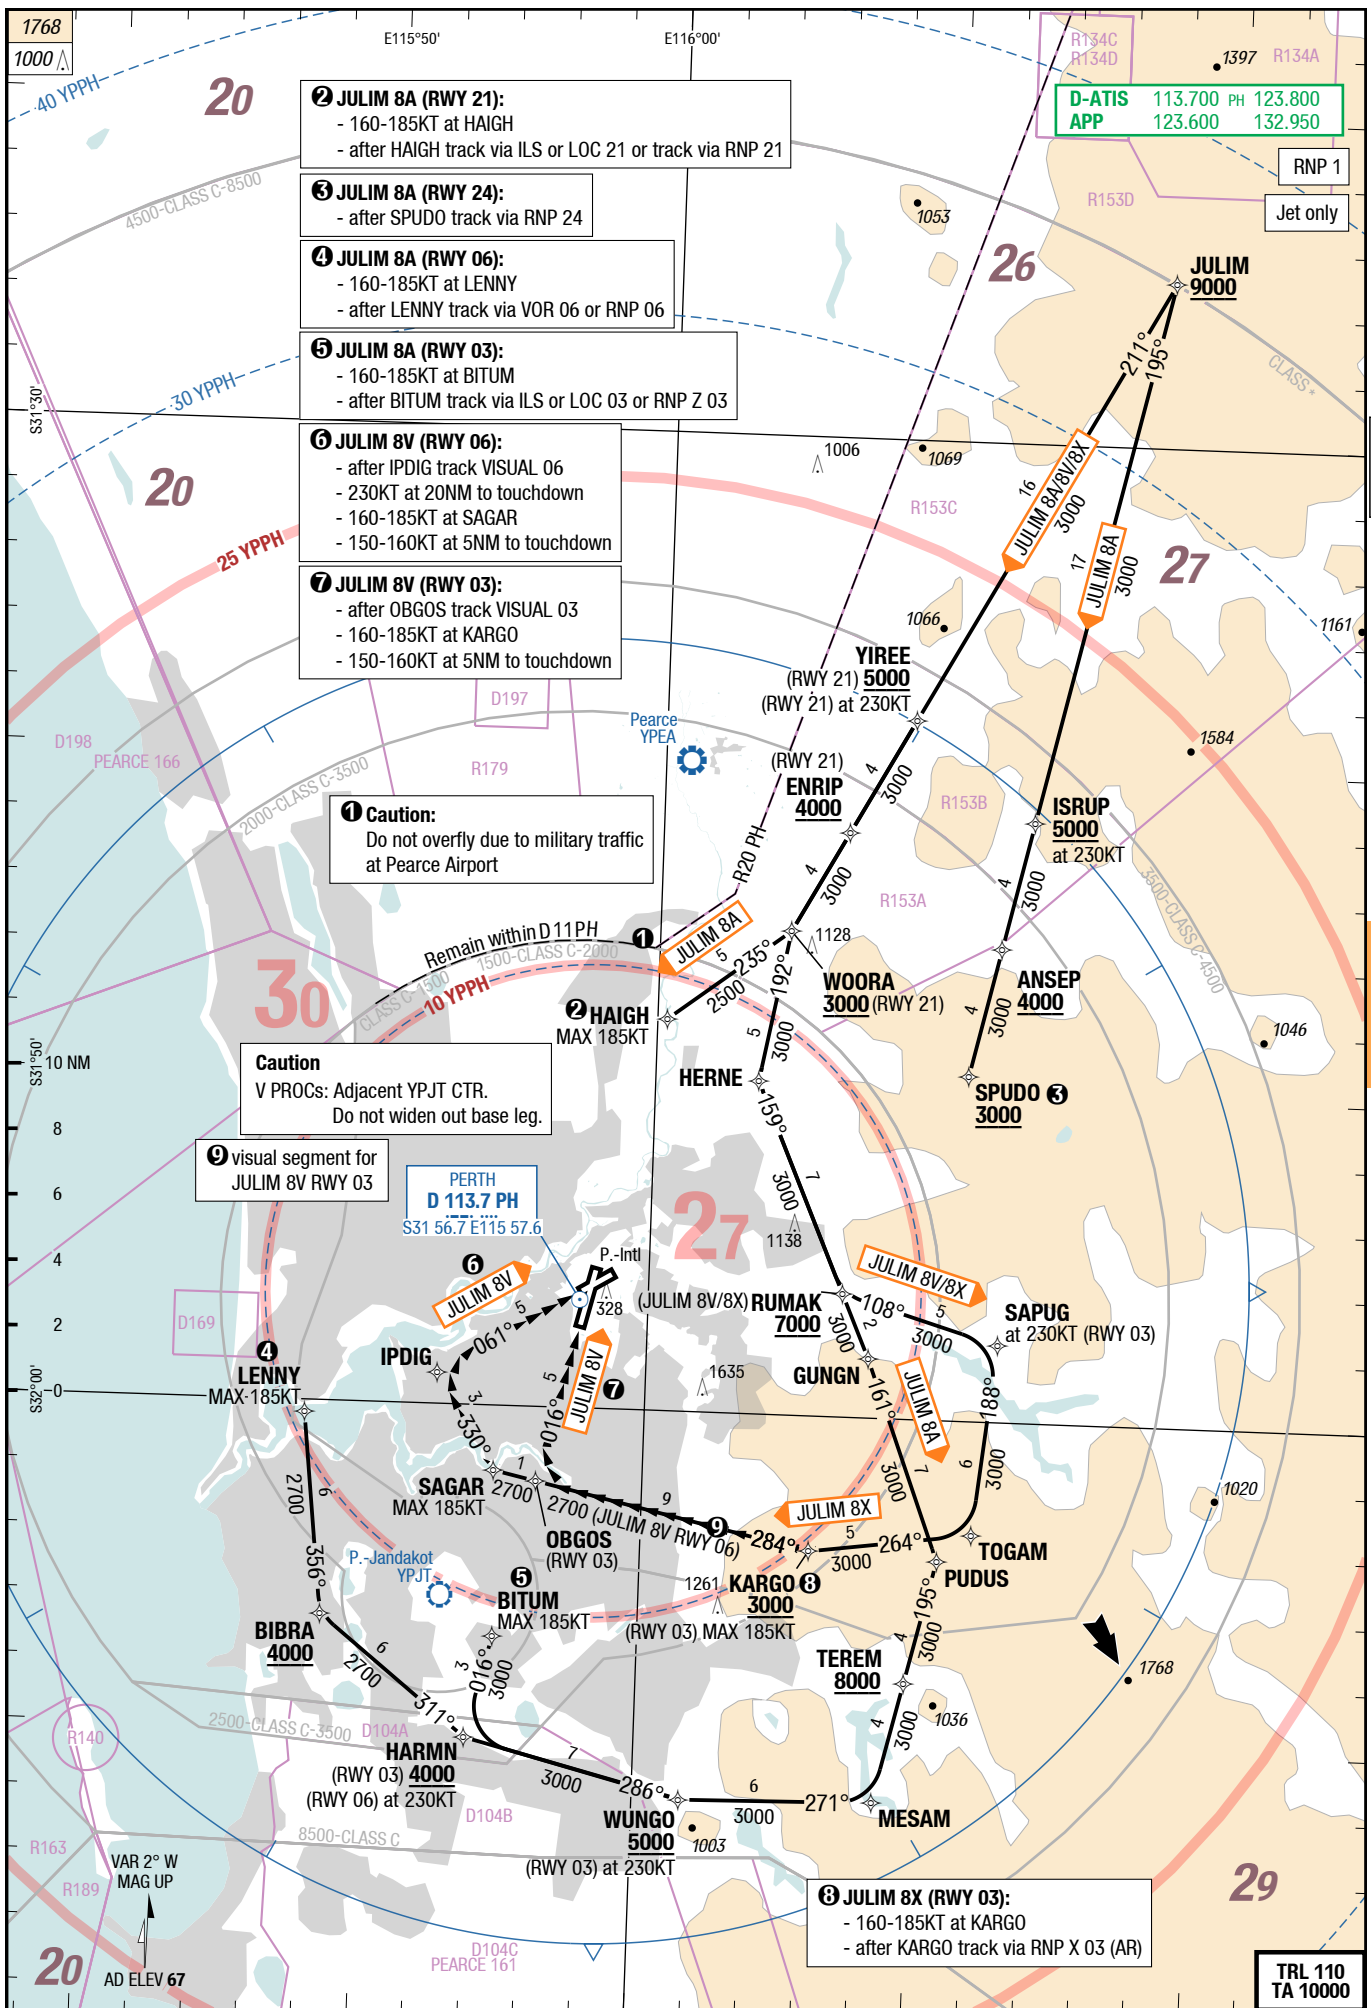

12-MAR-2026

PER-YPPH

Australia **Perth** Perth Intl

RNP STAR SOLUS

RNP STAR KABLI

STAR


STAR

Perth Intl **Perth** Australia


RNP STAR SOLUS

RNP STAR KABLI

6-30

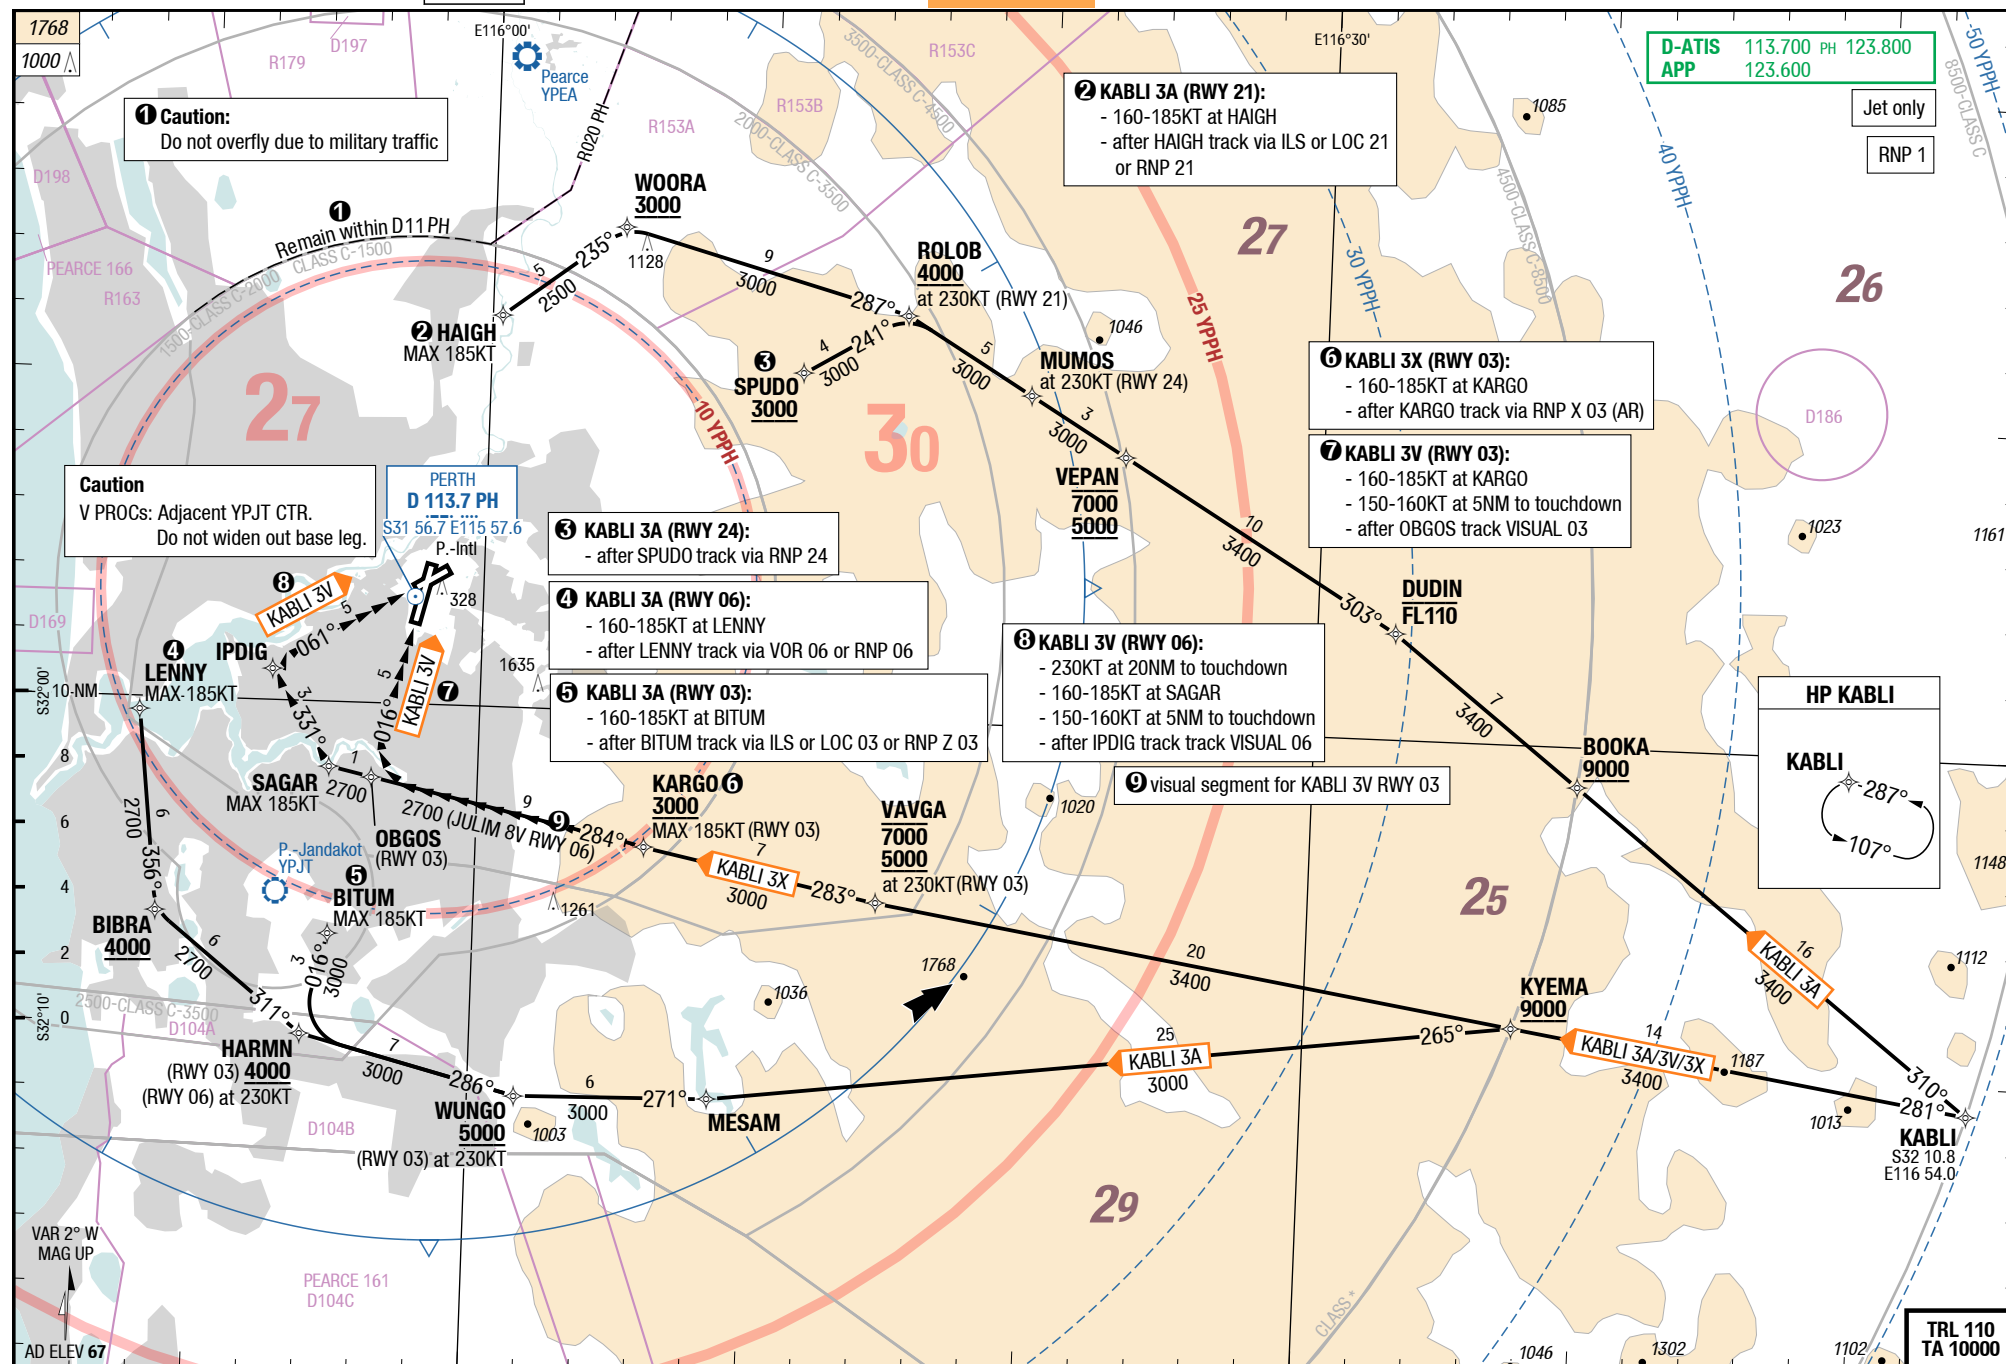


Changes: Completely revised

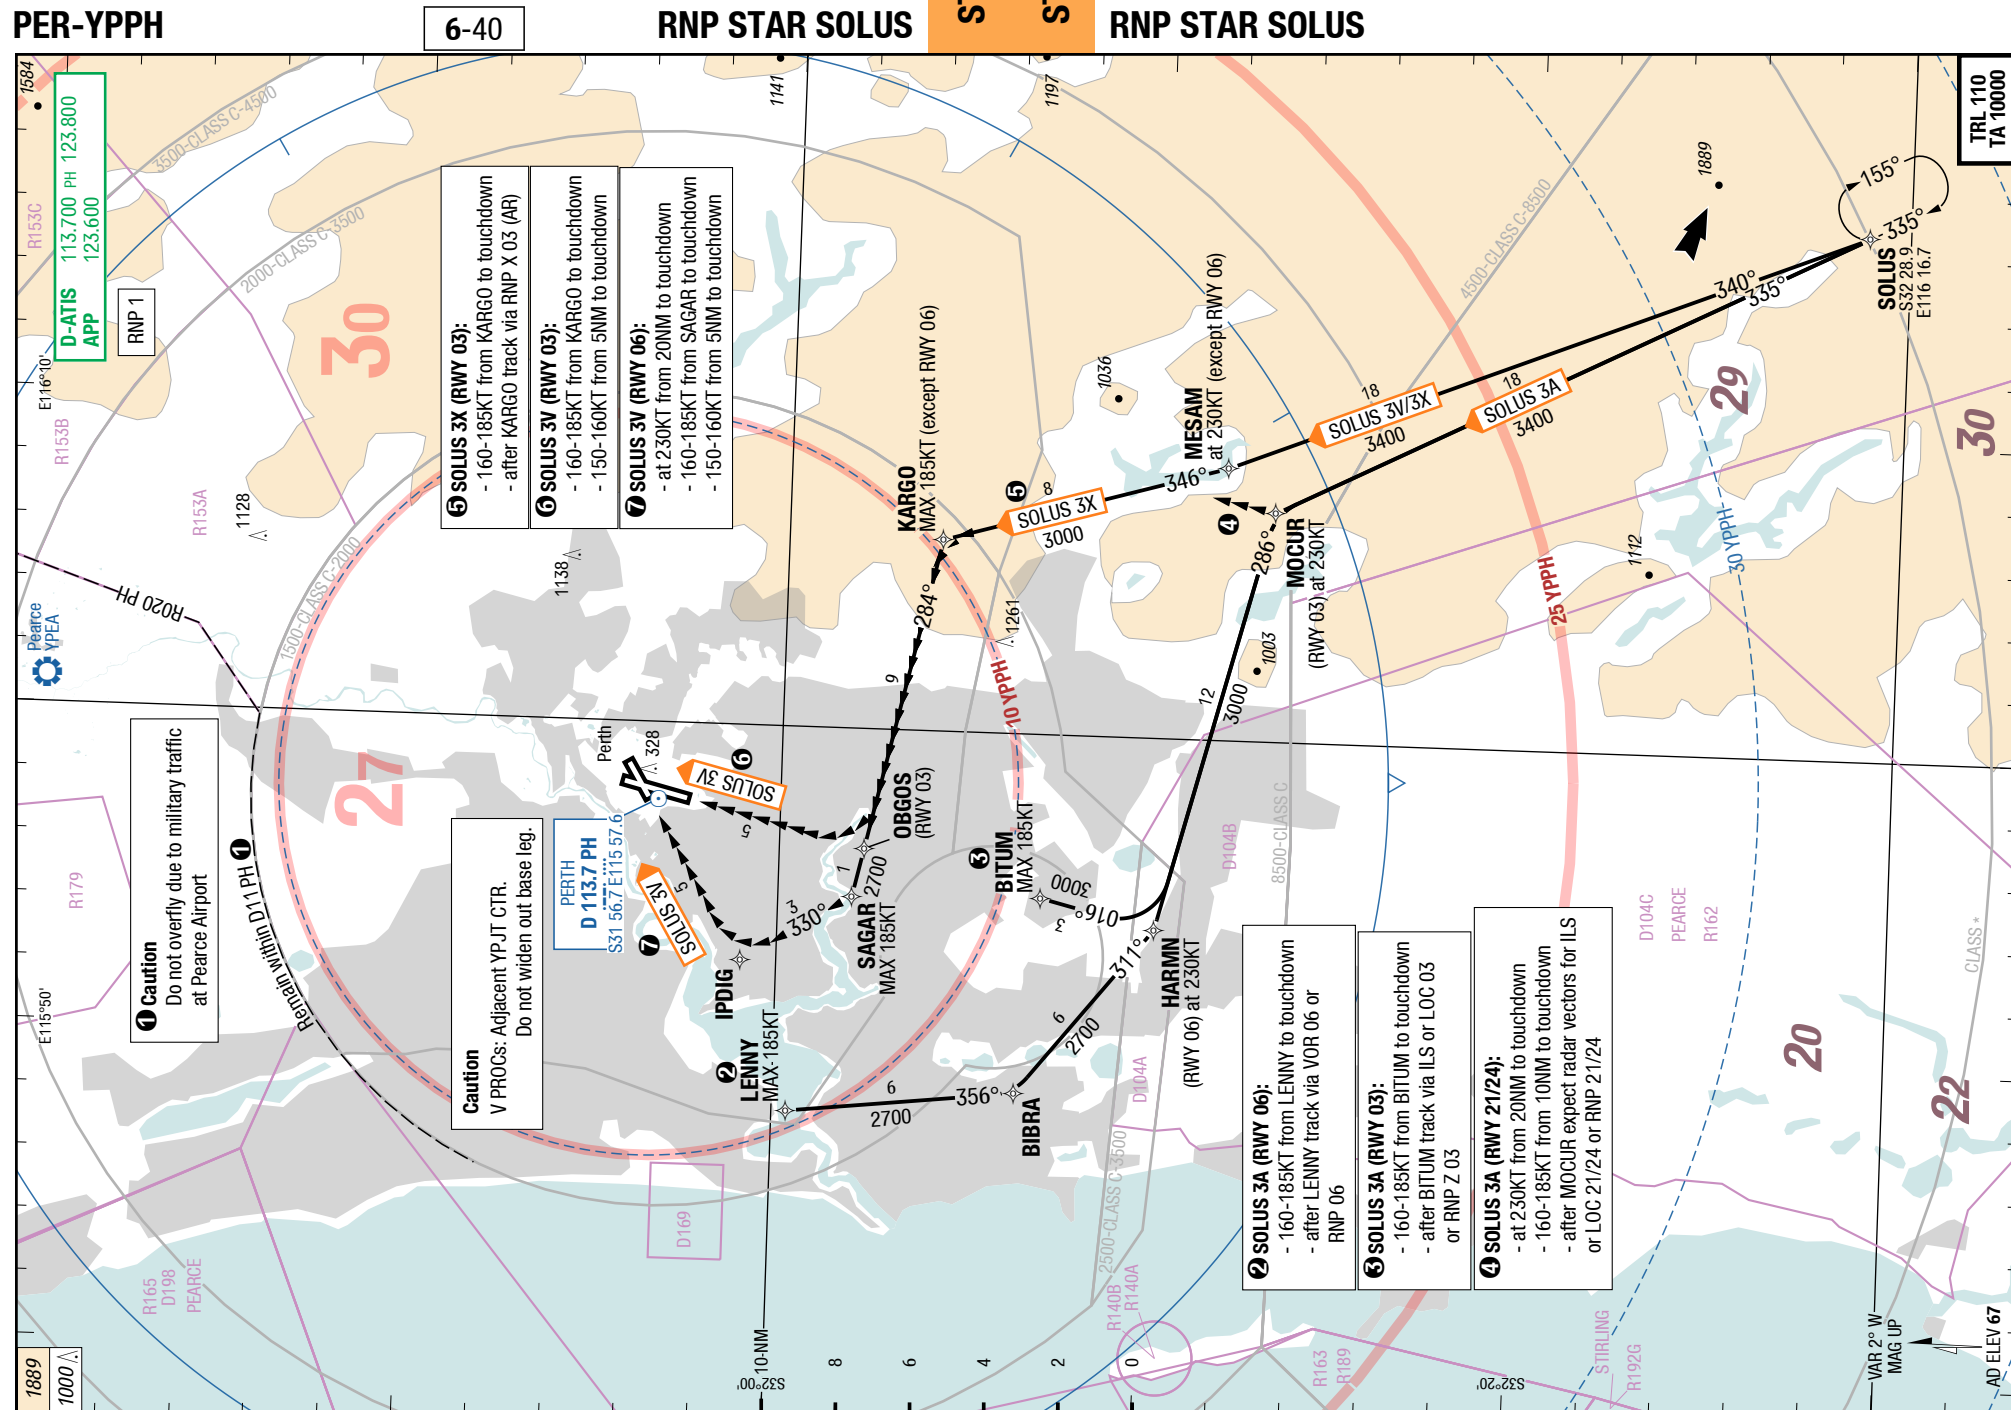


PER-YPPH

7-10

ILS Z or LOC Z 03

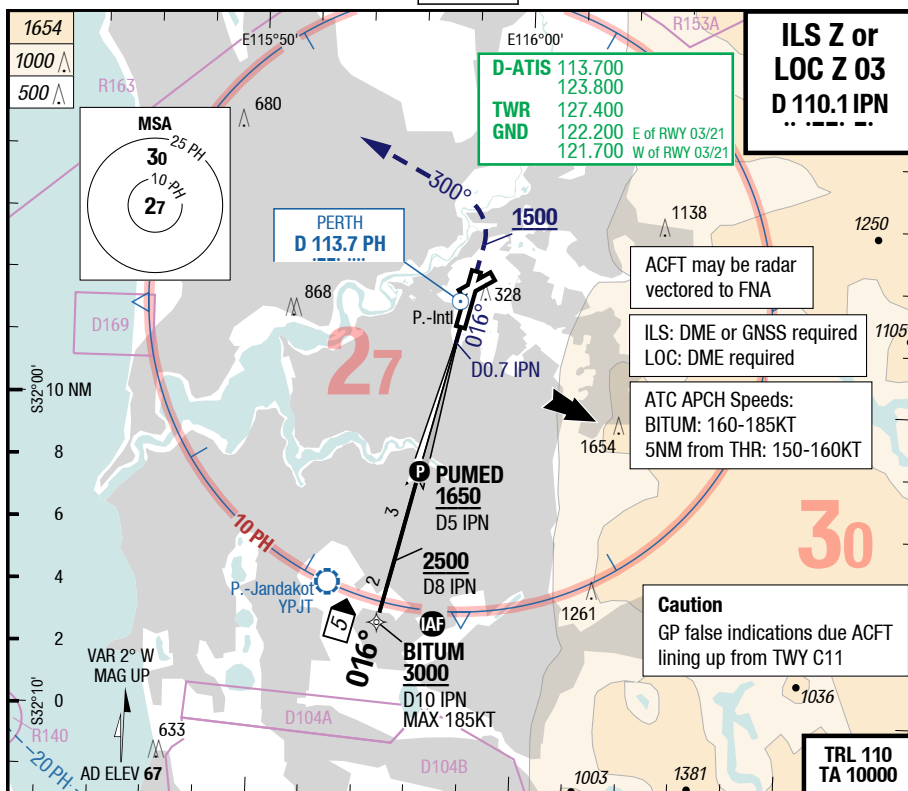

LOC 3.00° D IPN	9.2	7	6	4	3	2	Middle 3244m grooved		83.0°	60 HM	15 HL
	3000	2290	1970	1340	1020	700	03		3444 G 45		
							HL-P1	THR 67 (2hPa) / TDZ --- (---%)		-0.2%	

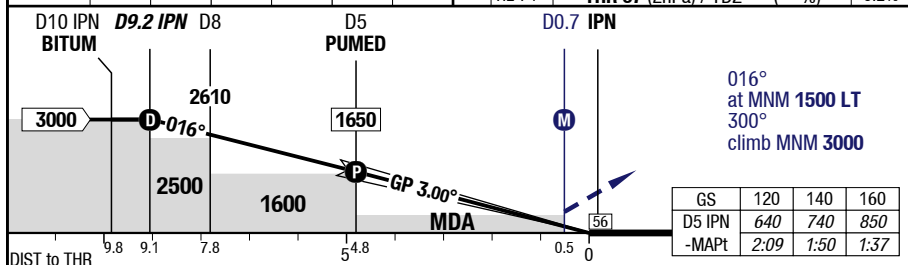


03	Cat 1 SA DME	Cat 1 DME 1)	LOC DME	Circling 2)
C	ft - m/km ft	150 - 450R 148 RA	210 - 550R/800V 270	460 - 1.7V 520
D	ft - m/km ft	150 - 450R 148 RA	210 - 550R/800V 270	460 - 1.7V 520

1) FD, AP or HUDLS required to DH, else 750m
2) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only


PER-YPPH

7-20

ILS Y or LOC Y 03

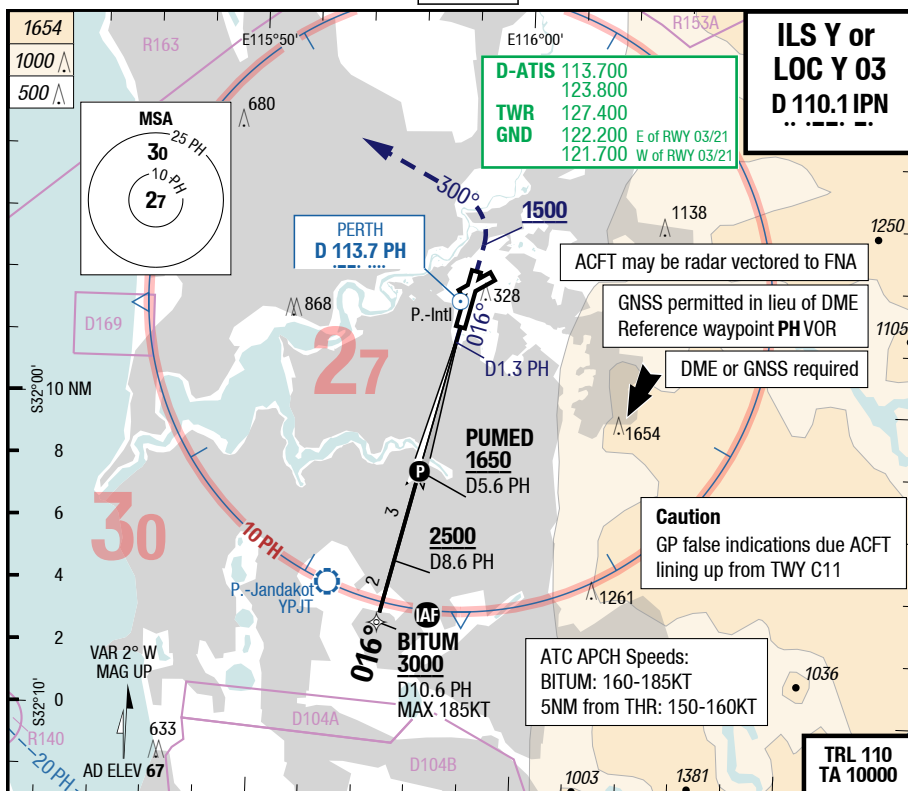

LOC 3.00° D PH	9.8	8	7	5	4	3	Middle 3244m grooved	83.0°	60 HM	15 HL
	3000	2410	2100	1460	1140	820	03	3444 G 45		
							HL-P1	THR 67 (2hPa) / TDZ --- (---%)		-0.2%

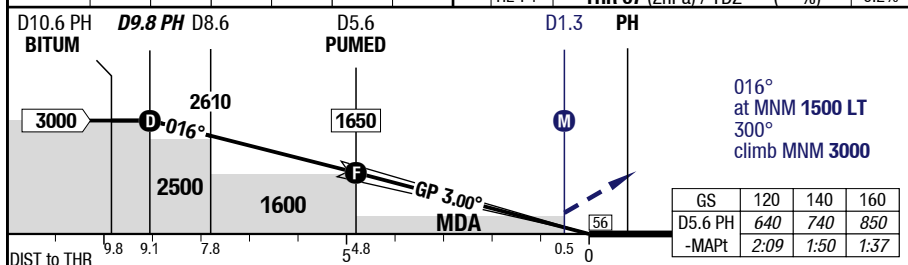

03	Cat 1 DME PH 1)	LOC DME PH			Circling 2)
C	ft - m/km ft 210 - 550R/800V 270	460 - 1.7V 520			1380 - 4.0V 1440
D	ft - m/km ft 210 - 550R/800V 270	460 - 1.7V 520			1380 - 5.0V 1440

1) FD, AP or HUDLS required to DH, else 750m


2) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only

Changes: ALT, SUAs, Note, OBST, Editorial


PER-YPPH

7-30

ILS Z or LOC Z 21

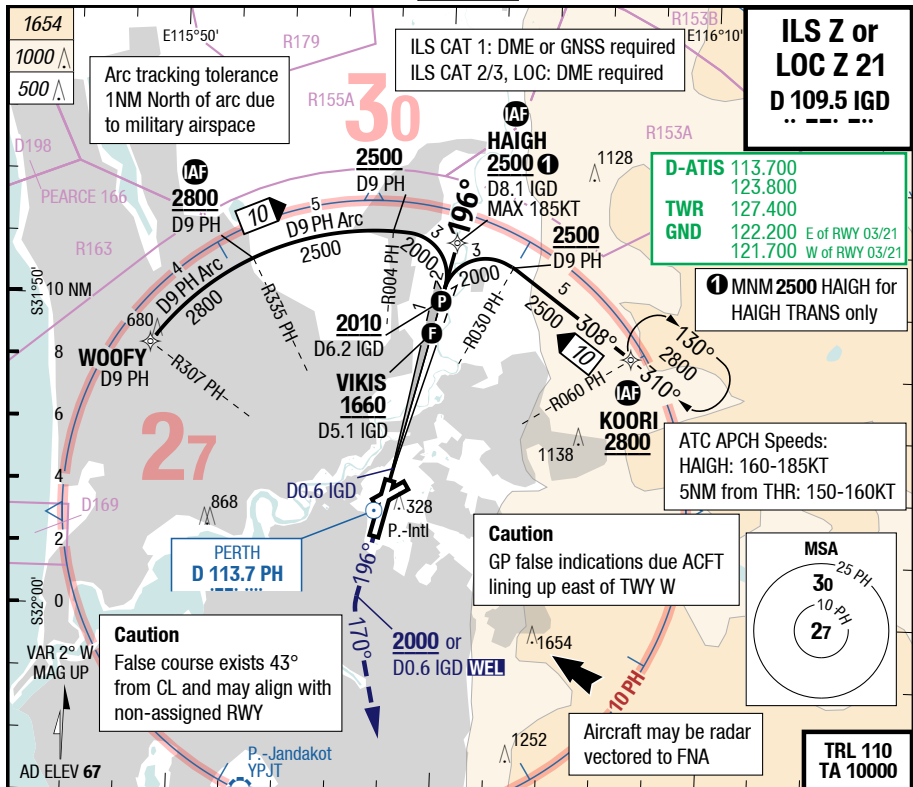

60 HM	3.0°	Middle 3244m grooved	2	3	4	5	6.2	LOC 3.00° D IGD
15 HL	3.0°	45 G 3444	21	690	1000	1320	1640	
+0.2% IDZ --- (---) / THR 43 (2hPa) HL-P2F								

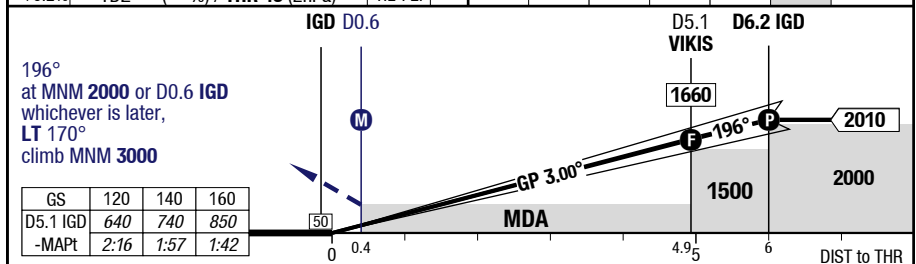

21		Cat 3 DME	Cat 2 DME	Cat 1 SA DME	Cat 1 DME	LOC DME	Circling 1)
C	ft - m/km ft	0 - 75R Company	100 - 300R 102 RA	150 - 450R 154 RA	210 - 550R/800V 250	510 - 2.0V 550	1380 - 4.0V 1440
D	ft - m/km ft	0 - 75R Company	100 - 300R 102 RA 2)	150 - 450R 154 RA	210 - 550R/800V 250	510 - 2.0V 550	1380 - 5.0V 1440



1) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only
2) If not conducting autoland and wo HUDLS, R350m required

Changes: ALT, OBST, Note, Editorial

PER-YPPH

7-40




ILS Y or LOC Y 21

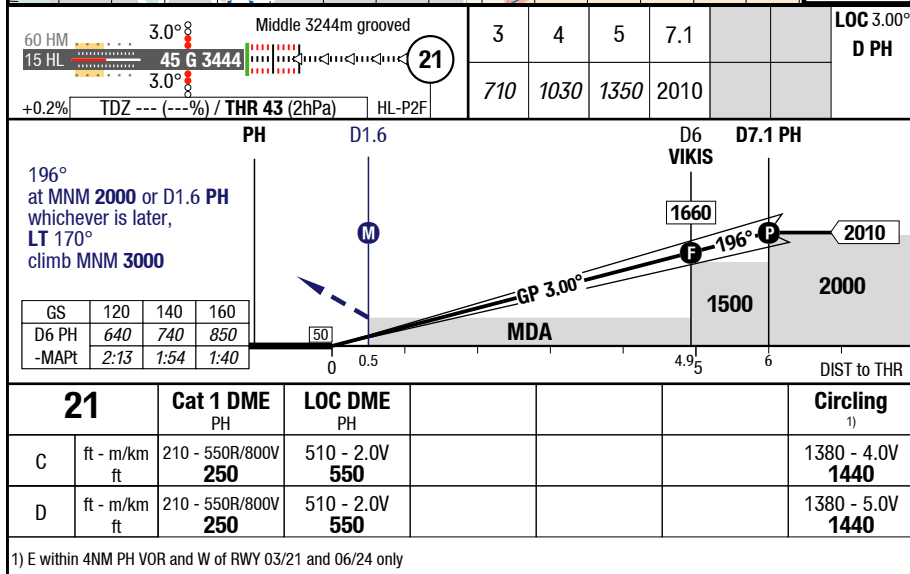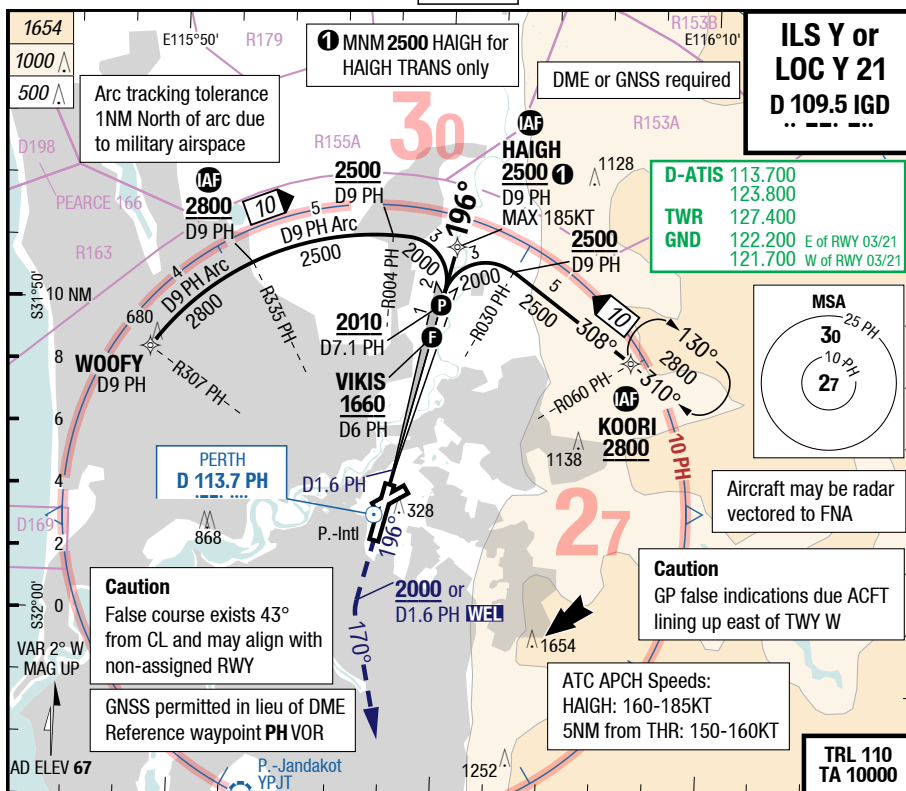

PER-YPPH

7-50

ILS Z or LOC Z 24

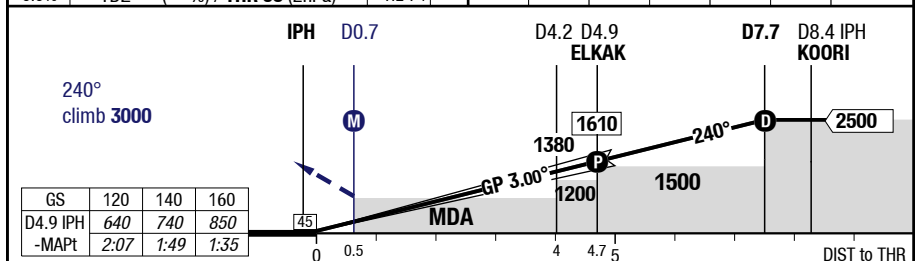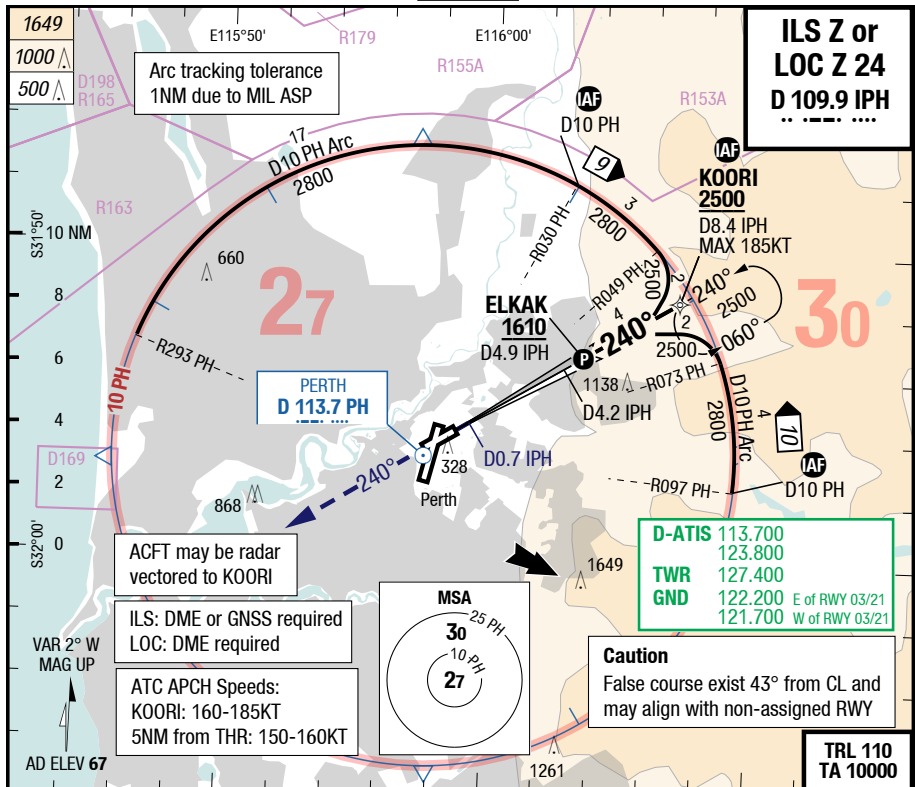

24	Cat 1 DME	LOC DME				Circling ¹⁾
C	ft - m/km ft	210 - 800V 260	500 - 1.9V 550			1380 - 4.0V 1440
D	ft - m/km ft	210 - 800V 260	500 - 1.9V 550			1380 - 5.0V 1440




1) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only

Changes: RWY grooving

PER-YPPH

7-60

ILS Y or LOC Y 24

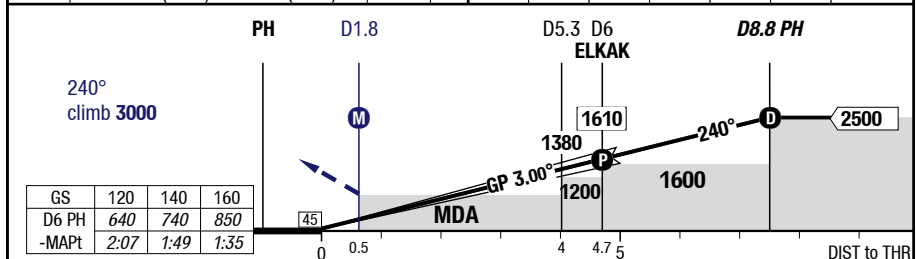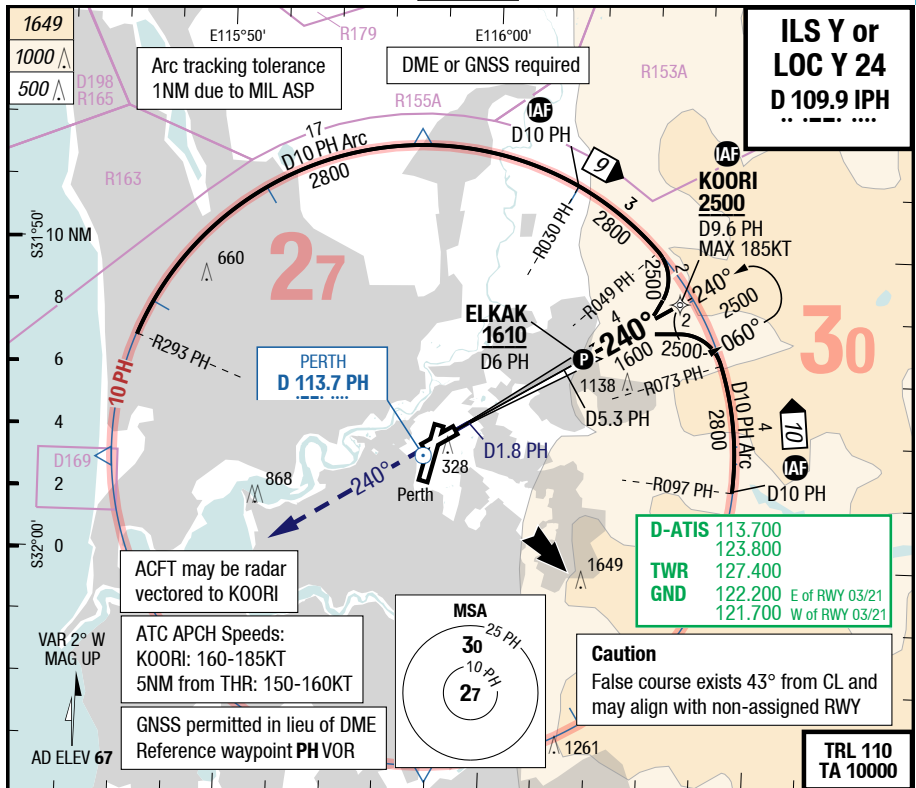

24	Cat 1 DME PH	LOC DME PH			Circling 1)
C	ft - m/km ft 210 - 800V 260	500 - 1.9V 550			1380 - 4.0V 1440
D	ft - m/km ft 210 - 800V 260	500 - 1.9V 550			1380 - 5.0V 1440




1) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only

Changes: RWY grooving

PER-YPPH

7-70

RNP X 03 (AR)

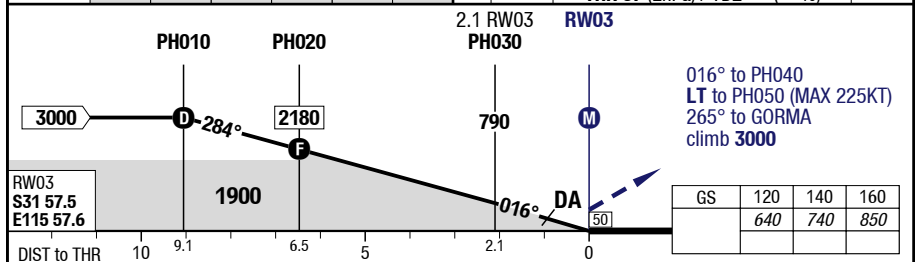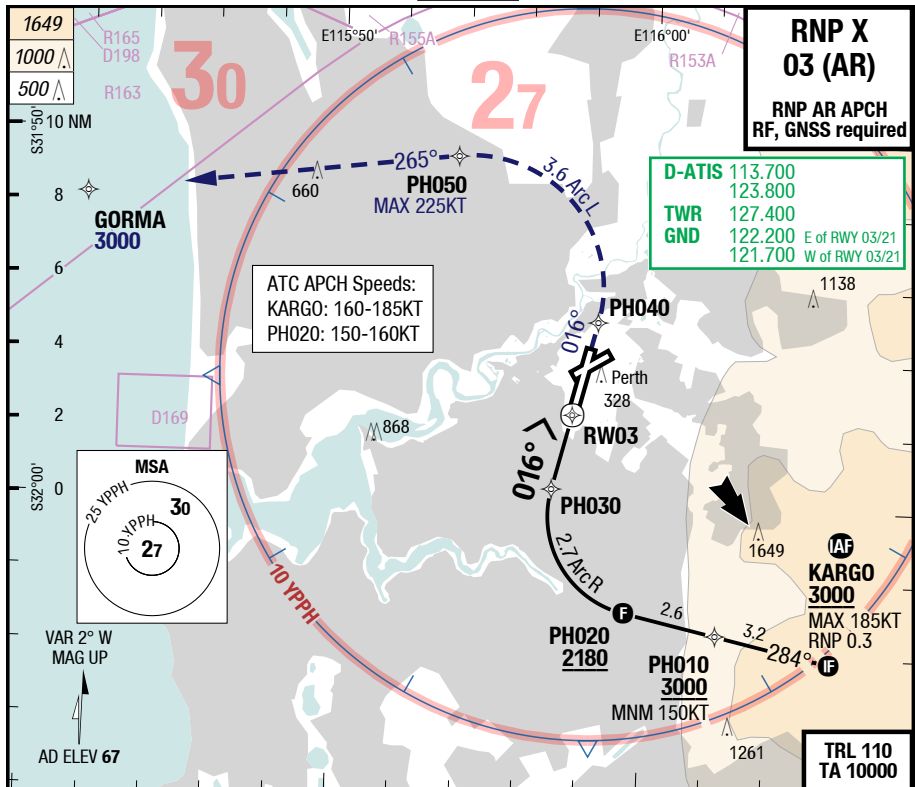

03	RNP 0.30 1) 2)	Circling
C	ft - m/km ft 390 - 1.2V 450	Not authorized
D	ft - m/km ft 390 - 1.2V 450	Not authorized


1) Uncompensated BARO VNAV NA below -2°C or above 49°C

2) Use with Perth (YPPH) QNH only


Changes: RWY grooving, APL

PER-YPPH

7-90

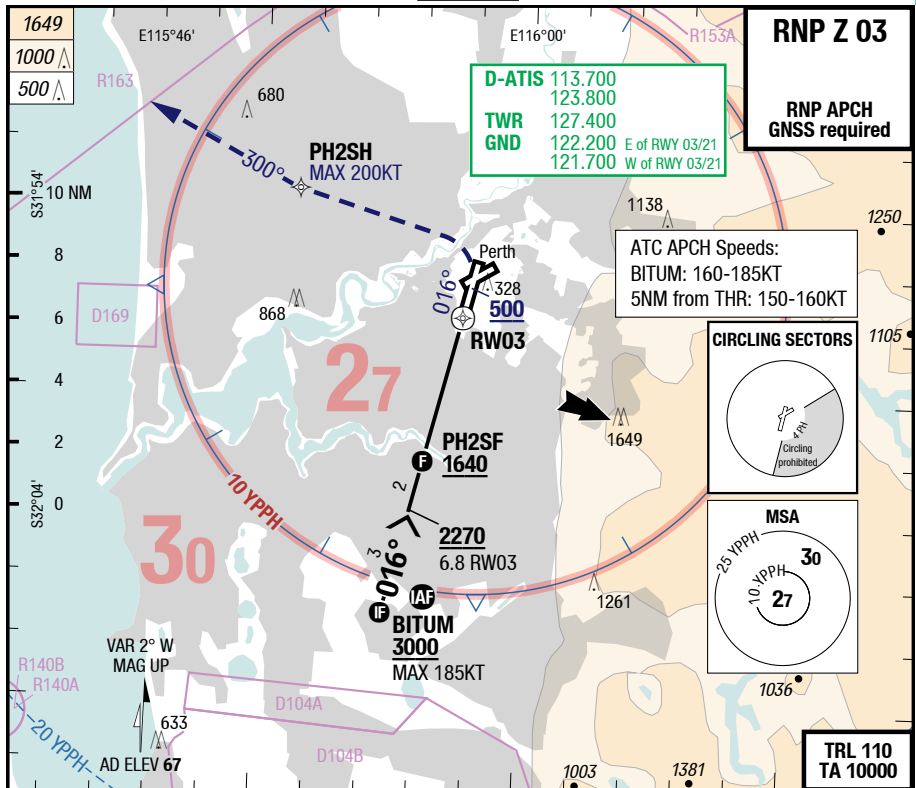RNP Z 03

3.00° RW03	9	7	5	4	3	2	Middle 3244m grooved 03 3.0° 60 HM 3444 G 45 15 HL 8.3.0° --- HL-P1 THR 67 (2hPa) / TPZ --- (---%) -0.2%
	3000	2360	1720	1400	1080	760	

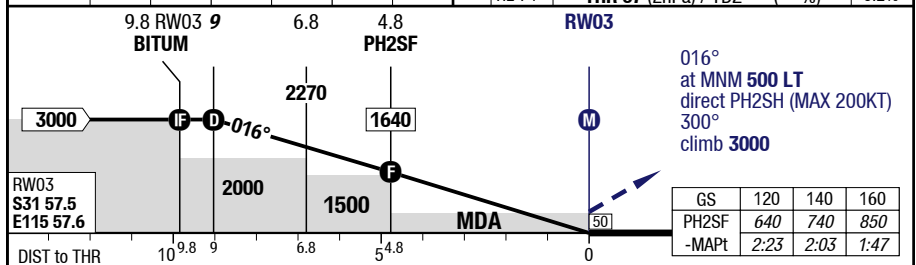

03		LNAV/VNAV 1) 2) 3)	LNAV				Circling 4)
C	ft - m/km ft	350 - 1.0V 410	500 - 1.9V 560				1380 - 4.0V 1440
D	ft - m/km ft	350 - 1.0V 410	500 - 1.9V 560				1380 - 5.0V 1440


1) Uncompensated BARO VNAV NA below -5°C or above 61°C 2) SBAS use for VNAV not applicable or not authorized 3) Use with Perth (YPPH) QNH only 4) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only. See sketch for details

Changes: APL, RWY grooving


PER-YPPH

7-100

RNP 06

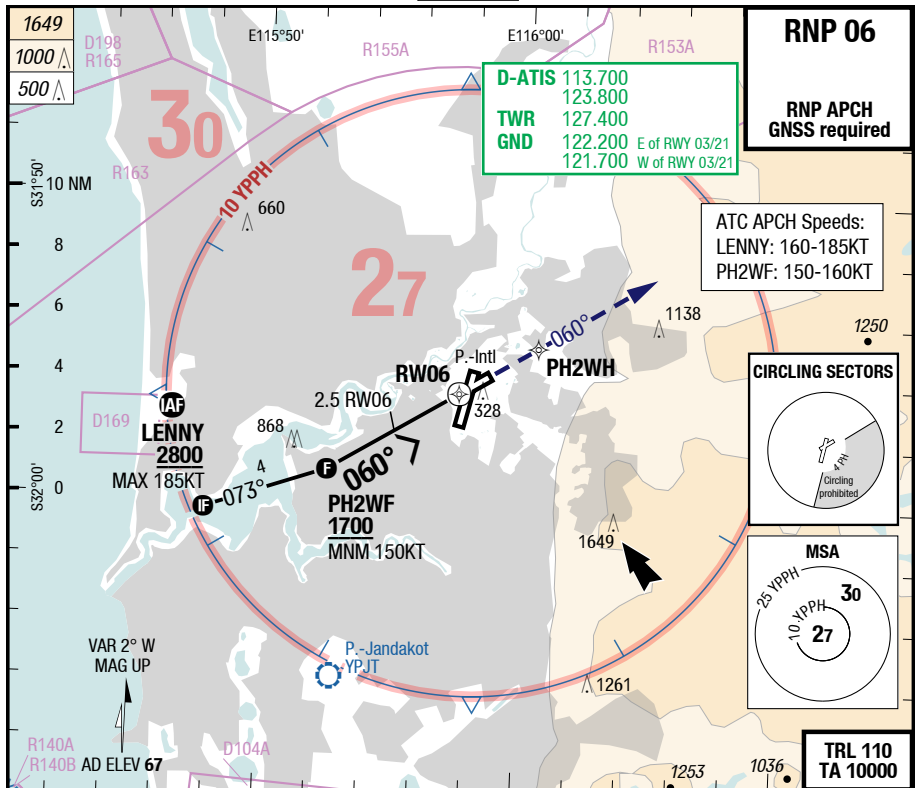

3.00° RW06 Offset 1° RWY 061°	8.5	7	6	4	3	2	06 Middle 1963m grooved 8.3.0° 2163 G 45 60 HM THR 58 (2hPa) / TDZ --- (---%) 0.0%
	2800	2350	2030	1390	1070	750	

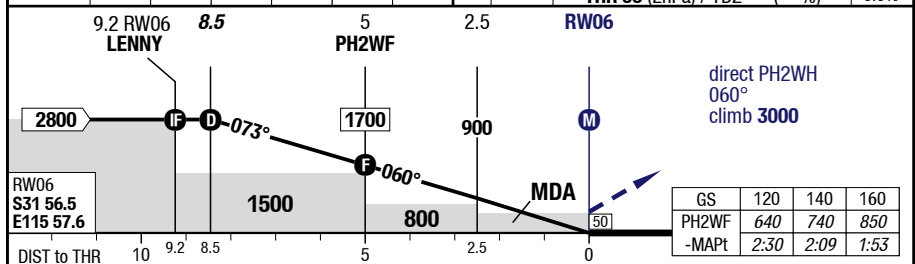


06		LNAV/VNAV 1) 2) 3)	LNAV				Circling 4)
C	ft - m/km ft	370 - 2.0V 420	480 - 2.7V 530				1380 - 4.0V 1440
D	ft - m/km ft	370 - 2.0V 420	480 - 2.7V 530				1380 - 5.0V 1440

1) Uncompensated BARO VNAV NA below -5°C or above 61°C 2) SBAS use for VNAV not applicable or not authorized 3) Use with Perth (YPPH) QNH only 4) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only. See sketch for details

Changes: RWY grooving

RNP 21



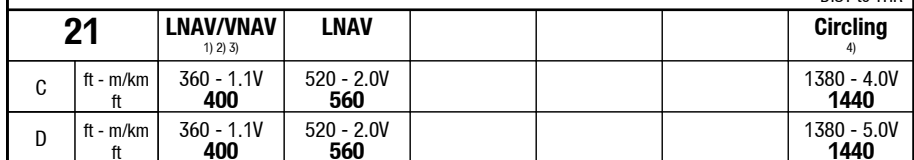


✓ **AirAsia (AirAsia)**

PER-YPPH

7-120

RNP 24

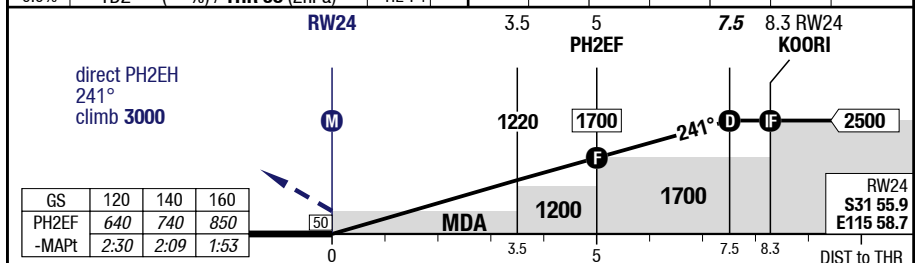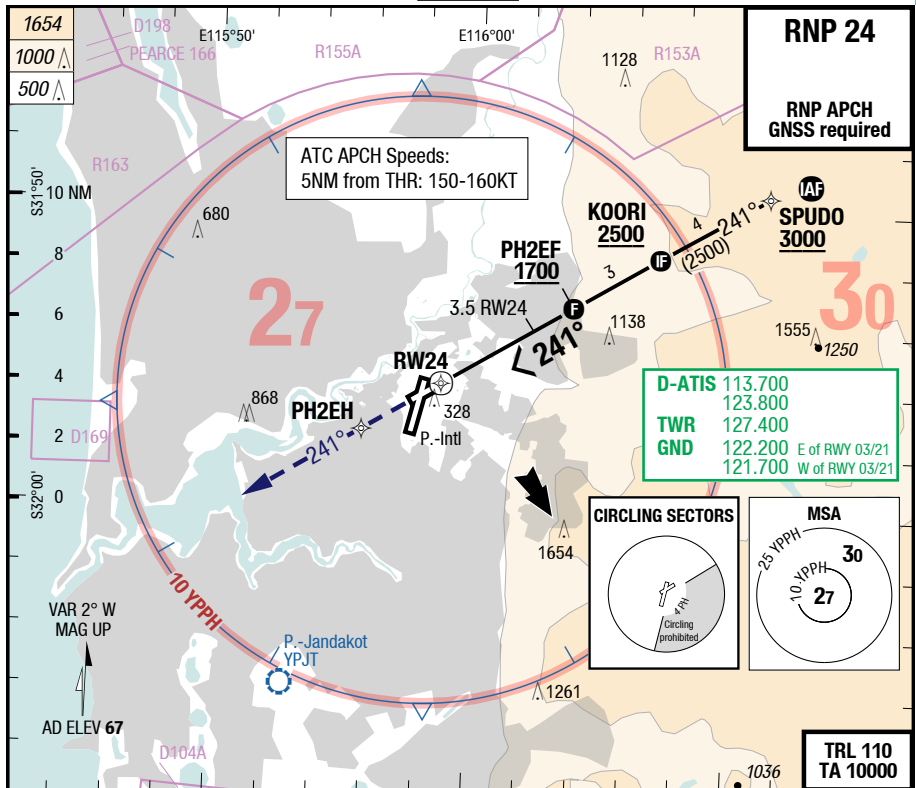

24		LNAV/VNAV 1) 2) 3)	LNAV				Circling 4)
C	ft - m/km ft	380 - 1.2V 430	510 - 1.9V 560				1380 - 4.0V 1440
D	ft - m/km ft	380 - 1.2V 430	510 - 1.9V 560				1380 - 5.0V 1440


1) Uncompensated BARO VNAV NA below -5°C or above 61°C 2) SBAS use for VNAV not applicable or not authorized 3) Use with Perth (YPPH) QNH only 4) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only. See sketch for details

Changes: PROC, FAT, Track, RWY , Note, OBST, Editorial

PER-YPPH

7-130

VOR 03

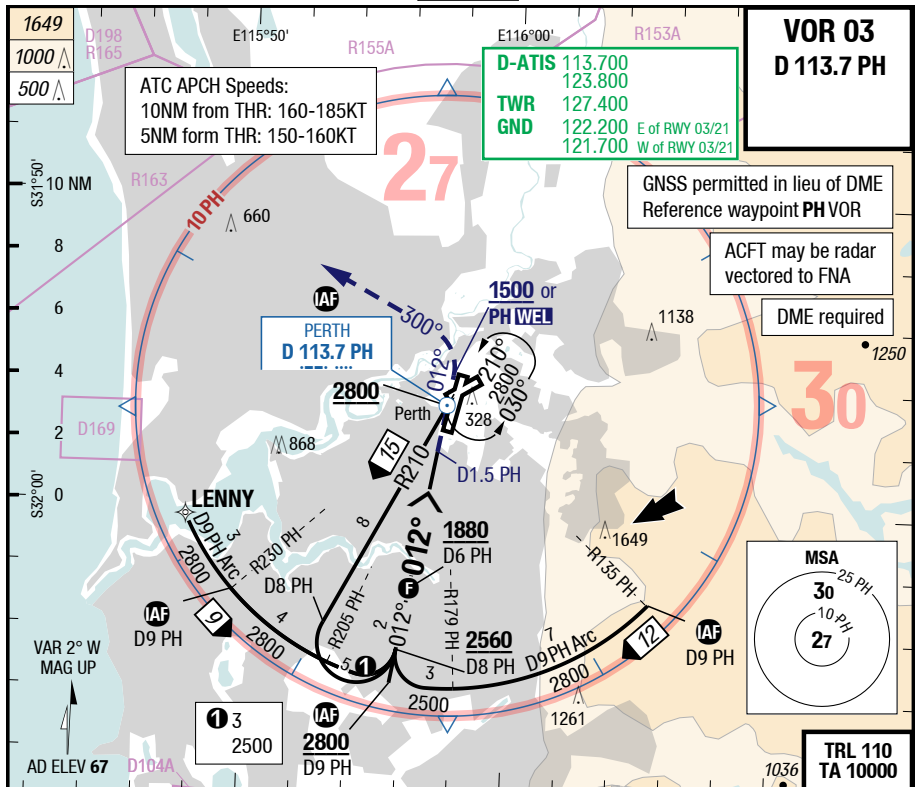


3.20°	8	7	5	4	3	2	Middle 3244m grooved	83.0°	60 HM																														
D PH							03	3444 G 45	15 HL																														
012°	2560	2230	1550	1210	870	530																																	
RWY 016°							HL-P1	THR 67 (2hPa) / TDZ --- (---%)	-0.2%																														
D8 PH		D6		D1.5		PH		012° at MNM 1500 or PH, whichever is later, LT 300° climb 3000																															
<table><tr><td>GS</td><td>120</td><td>140</td><td>160</td></tr><tr><td>D6 PH</td><td>680</td><td>790</td><td>910</td></tr><tr><td>-MAPT</td><td>2:15</td><td>1:56</td><td>1:41</td></tr></table>										GS	120	140	160	D6 PH	680	790	910	-MAPT	2:15	1:56	1:41																		
GS	120	140	160																																				
D6 PH	680	790	910																																				
-MAPT	2:15	1:56	1:41																																				
DIST to THR																																							
<table><tr><td colspan="2">03</td><td colspan="2">VOR DME</td><td></td><td></td><td></td><td></td><td colspan="2">Circling 1)</td></tr><tr><td>C</td><td>ft - m/km ft</td><td>460 - 1.5V 520</td><td></td><td></td><td></td><td></td><td></td><td colspan="2">1380 - 4.0V 1440</td></tr><tr><td>D</td><td>ft - m/km ft</td><td>460 - 1.5V 520</td><td></td><td></td><td></td><td></td><td></td><td colspan="2">1380 - 5.0V 1440</td></tr></table>										03		VOR DME						Circling 1)		C	ft - m/km ft	460 - 1.5V 520						1380 - 4.0V 1440		D	ft - m/km ft	460 - 1.5V 520						1380 - 5.0V 1440	
03		VOR DME						Circling 1)																															
C	ft - m/km ft	460 - 1.5V 520						1380 - 4.0V 1440																															
D	ft - m/km ft	460 - 1.5V 520						1380 - 5.0V 1440																															
1) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only																																							

Changes: APL, RWY grooving


PER-YPPH

7-140

VOR 06

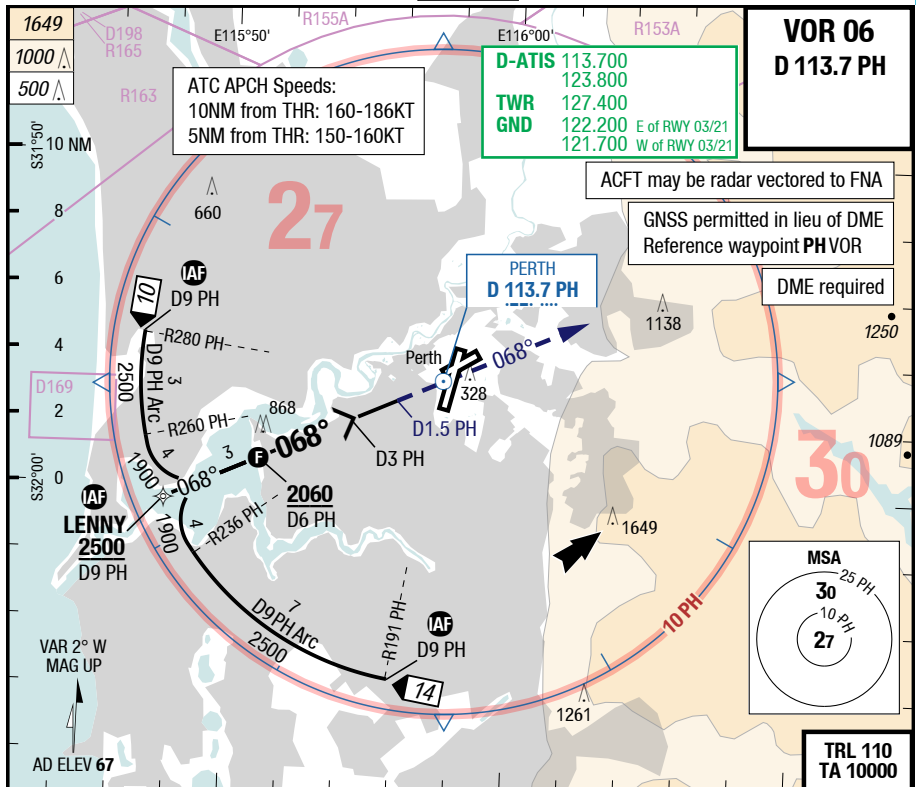

3.00° D PH	7.4	7	5	4	3	2	06	Middle 1963m grooved 8.3.0° 2163 G 45 60 HM
Offset 7° RWY 061°	2500	2370	1740	1420	1100	780		THR 58 (2hPa) / TDZ --- (---%) 0.0%

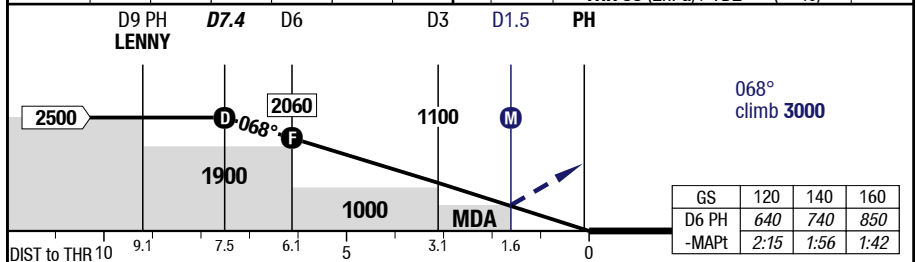

06		VOR DME					Circling ¹⁾
C	ft - m/km ft	570 - 3.2V 620					1380 - 4.0V 1440
D	ft - m/km ft	570 - 3.2V 620					1380 - 5.0V 1440


1) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only

Changes: RWY grooving

PER-YPPH

7-150


VOR 21

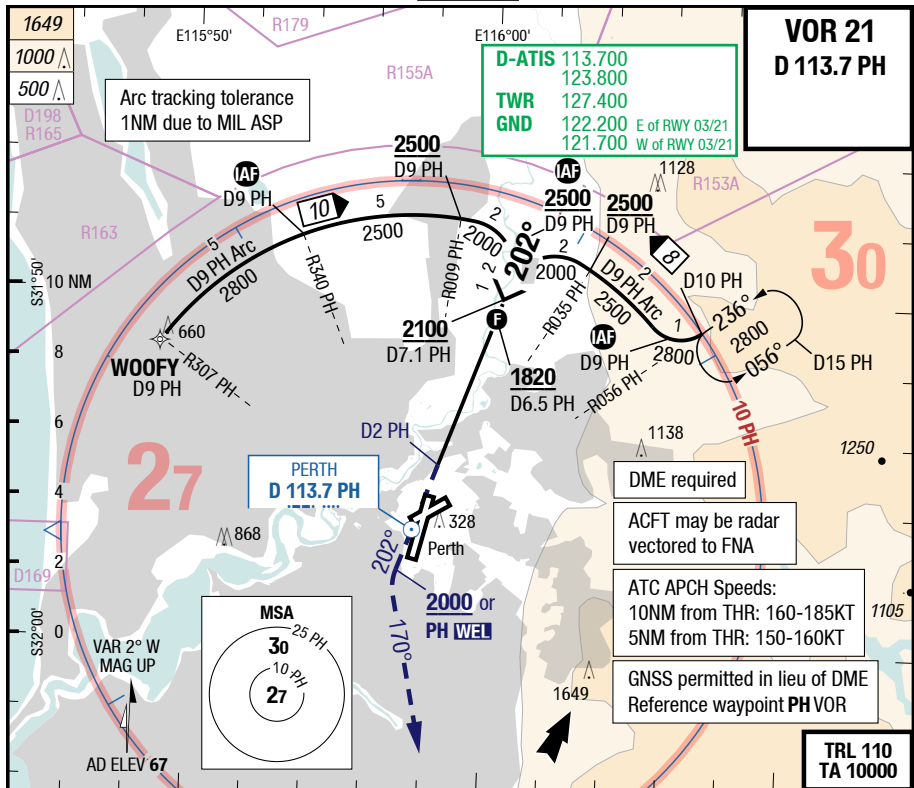

60 HM 15 HL 3.0° 45 G 3444 3.0° +0.2% TDZ --- (---) / THR 43 (2hPa) HL-P2F		Middle 3244m grooved 21	3	4	5	6	7	7.1	3.00° D PH 202° RWY 196°
			710	1030	1350	1670	2000	2010	

202°
at MNM 2000 or PH,
whichever is later,
LT 170°
climb 3000

GS	120	140	160
D6.5 PH	640	740	850
-MAPt	2:14	1:55	1:41

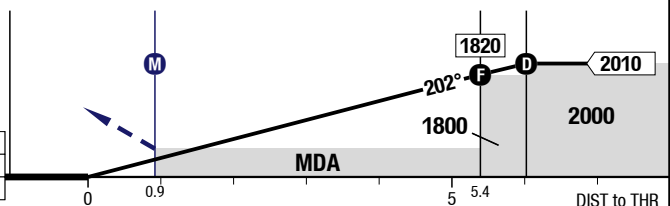

21		VOR DME					Circling ¹⁾
C	ft - m/km ft	510 - 2.9V 550					1380 - 4.0V 1440
D	ft - m/km ft	510 - 2.9V 550					1380 - 5.0V 1440


1) E within 4NM PH VOR and W of RWY 03/21 and 06/24 only

Changes: RWY grooving

PER-YPPH

7-160

VOR 24

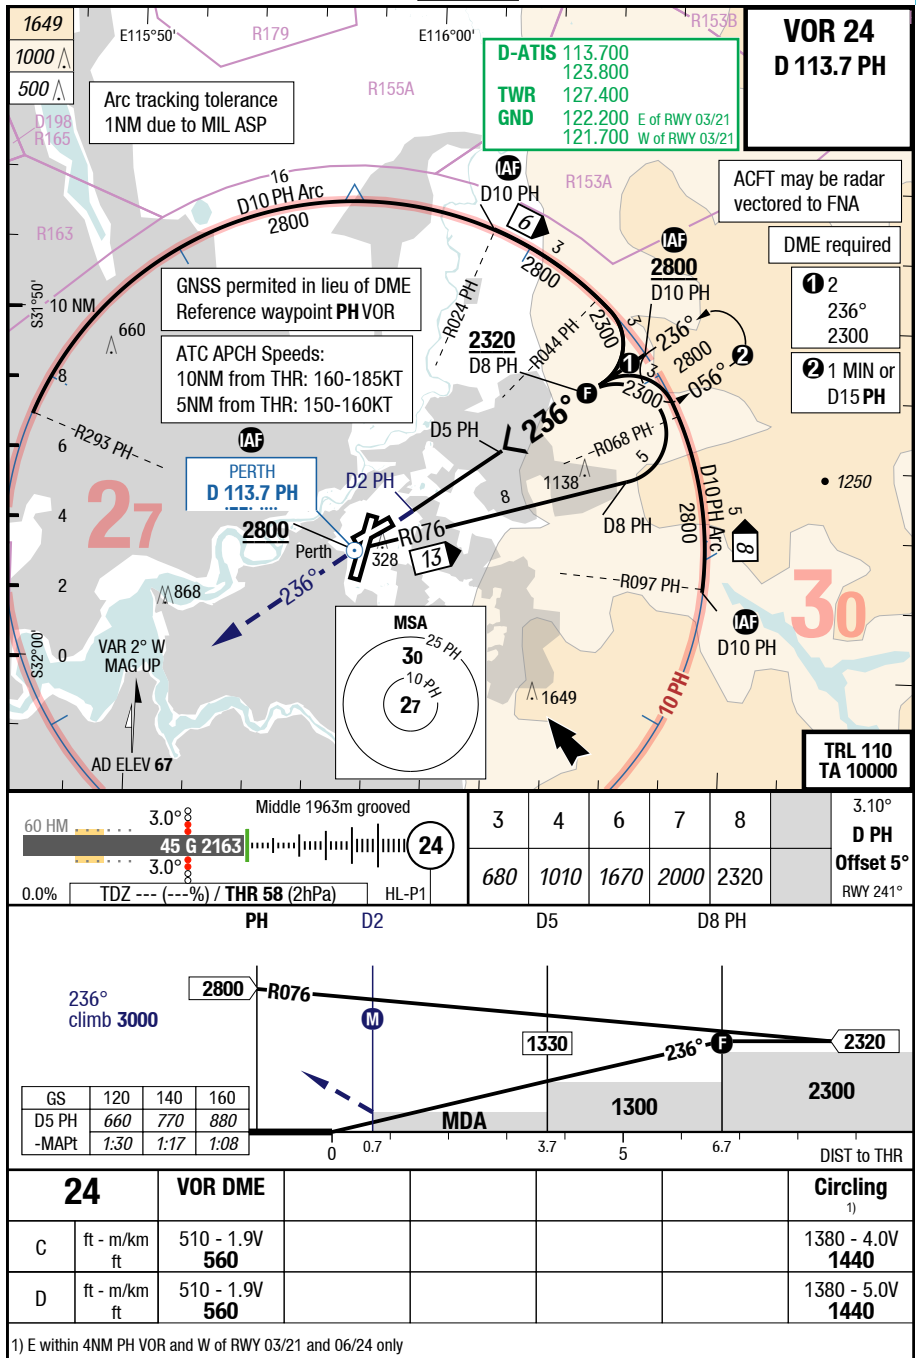

Changes: RWY grooving