

GXA-S潤滑油更換 Replacement of Lubrication(For GXA-S Series)

For all detron GXA-S series

Safety Equipment : None

Tools :

A

B



A - T型板手#8 T-type wrench#8

B - 止瀉帶 Thread Seal Tape


Illustration (部位位置說明) :



Parts:

1. 注油塞蓋 Plug

Step 1 排油 Drain the lubrication

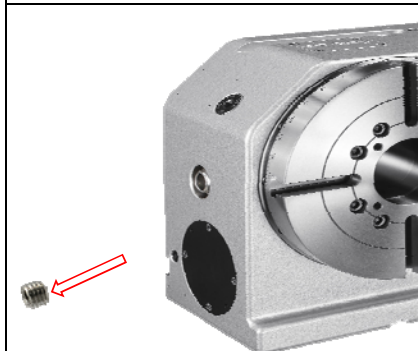


使用8號T型板手將排油塞頭拆除排出齒輪油
Using T-type wrench#8 to remove the set screws, then drain the lubrication.

Tools:



Step 2 安裝排油塞頭 Install the plug

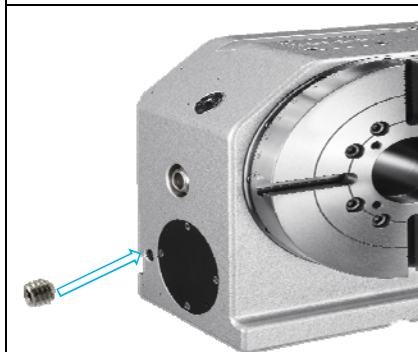

1. 將塞頭纏上止瀉帶
2. 使用8號T型板手將排油塞頭鎖緊
1. Wrap the set screws with thread seal tape.
2. Lock the set screws with T-type wrench#8.

Tools:



GXA-S潤滑油更換 Replacement of Lubrication(For GXA-S Series)

For all detron GXA-S series

Step 3 添加齒輪油 Add the lubrication



1. 使用8號T型板手將注油塞蓋拆除
 2. 添加齒輪油至本體內(以下參考建議油品)添加油量參考操作手冊11.1章
 3. 添加完成後,使用8號T型板手將塞蓋鎖固
1. Using T-type wrench#8 to remove the plug.
 2. Add lubrication to the body (refer to below list), about the amount refer to Chapter 11.1 of the operation manual.
 3. After adding, lock the plug with T-type wrench#8.

製造廠商	品名
Shell	Omala 150
Esso	Spartanep 150
Mobile	Mobile Gear 629
JoMo	Reductus 100

Remark:

建議使用尖嘴型油壺添加齒輪油

It is better to add lubrication with needle-nose oil bottle.

