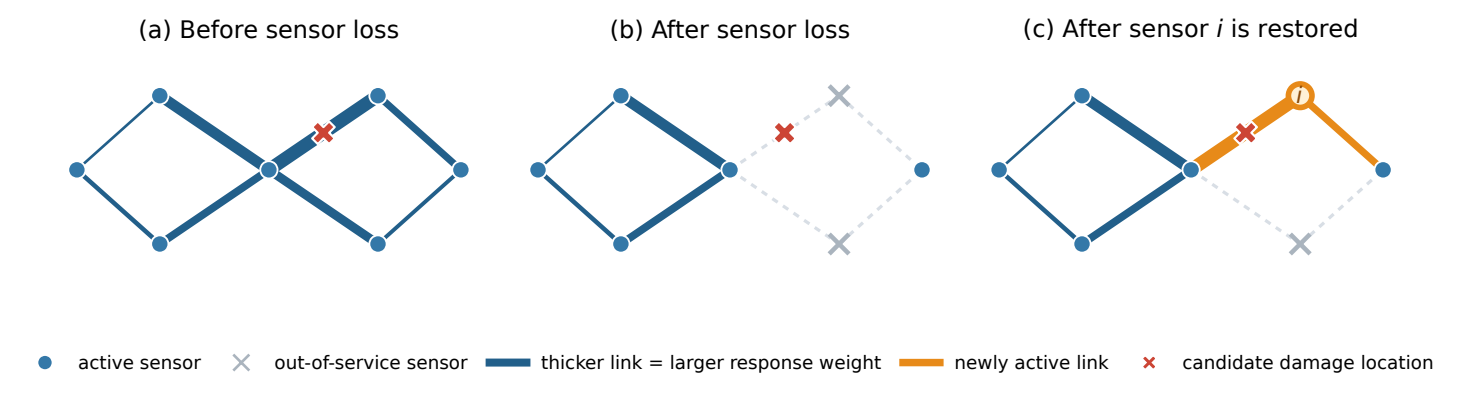
(a) Before sensor loss
(b) After sensor loss
(c) After sensor i is restored
i
active sensor
out-of-service sensor
thicker link = larger response weight
newly active link
candidate damage location