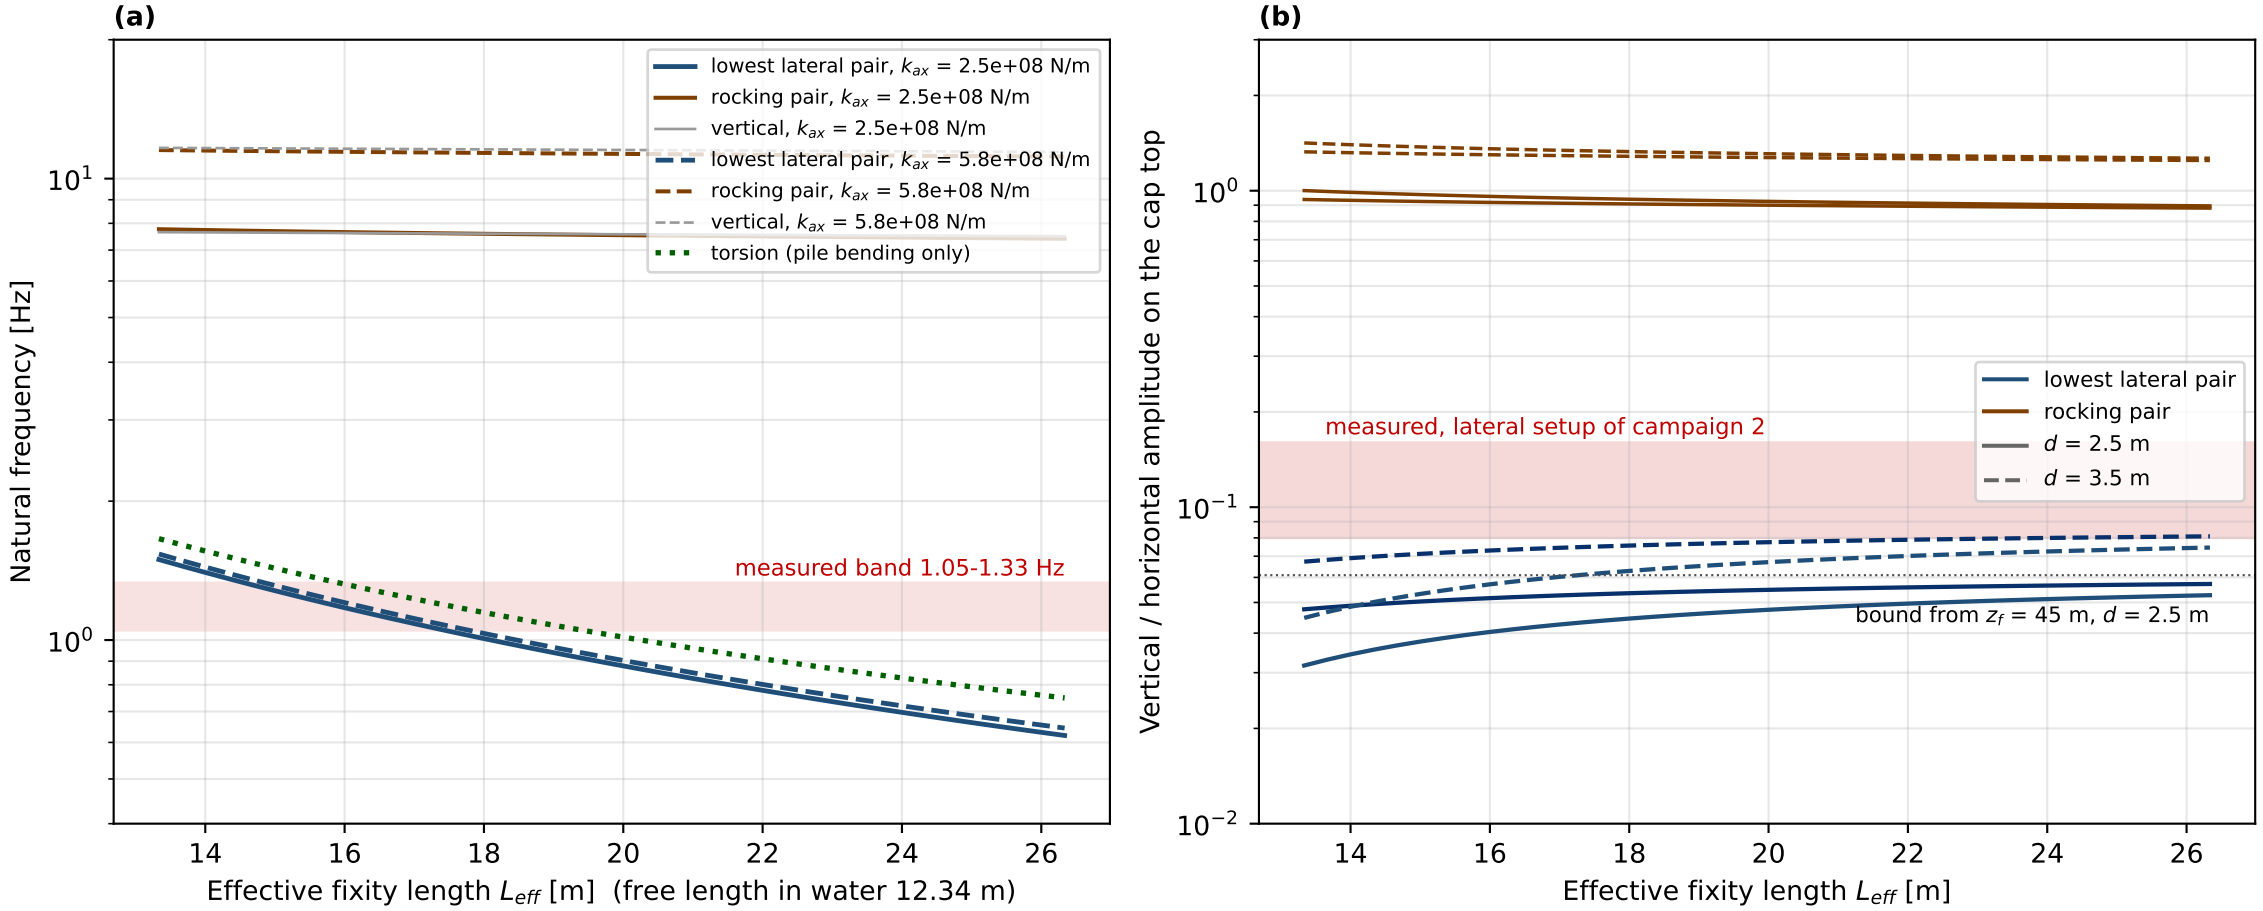
(a)
lowest lateral pair, k_{ax} = 2.5e+08 N/m
rocking pair, k_{ax} = 2.5e+08 N/m
vertical, k_{ax} = 2.5e+08 N/m
lowest lateral pair, k_{ax} = 5.8e+08 N/m
rocking pair, k_{ax} = 5.8e+08 N/m
vertical, k_{ax} = 5.8e+08 N/m
torsion (pile bending only)
measured band 1.05-1.33 Hz
Natural frequency [Hz]
10^1
10^0
14
16
18
20
22
24
26
Effective fixity length L_{eff} [m] (free length in water 12.34 m)
(b)
Vertical / horizontal amplitude on the cap top
10^0
10^{-1}
10^{-2}
lowest lateral pair
rocking pair
d = 2.5 m
d = 3.5 m
measured, lateral setup of campaign 2
bound from z_f = 45 m, d = 2.5 m
14
16
18
20
22
24
26
Effective fixity length L_{eff} [m]