



SCEC TPV104: strike slip rate at every station; LTS p=2 200 m (Vista 1082385) (dashed) against gold (Vista 1075917) and DRDG3D
x2_-12_x3_3
x2_0_x3_3
x2_12_x3_3
x2_-9_x3_7.5
x2_0_x3_7.5
x2_9_x3_7.5
x2_-12_x3_12
x2_0_x3_12
x2_12_x3_12
strike slip rate (m/s)
DRDG3D
gold (Vista 1075917)
LTS p=2 200 m (Vista 1082385)

SCEC TPV104 station x2_-12_x3_3 (strike -12 km, depth 3 km)
LTS p=2 200 m (Vista 1082385) vs gold (Vista 1075917): arrival +0.23 ms peak -0.007 % final slip -0.043 %; vs DRDG3D: arrival +0.004 s peak +2.6 % slip -1.49 %


(a) strike slip rate (m/s)

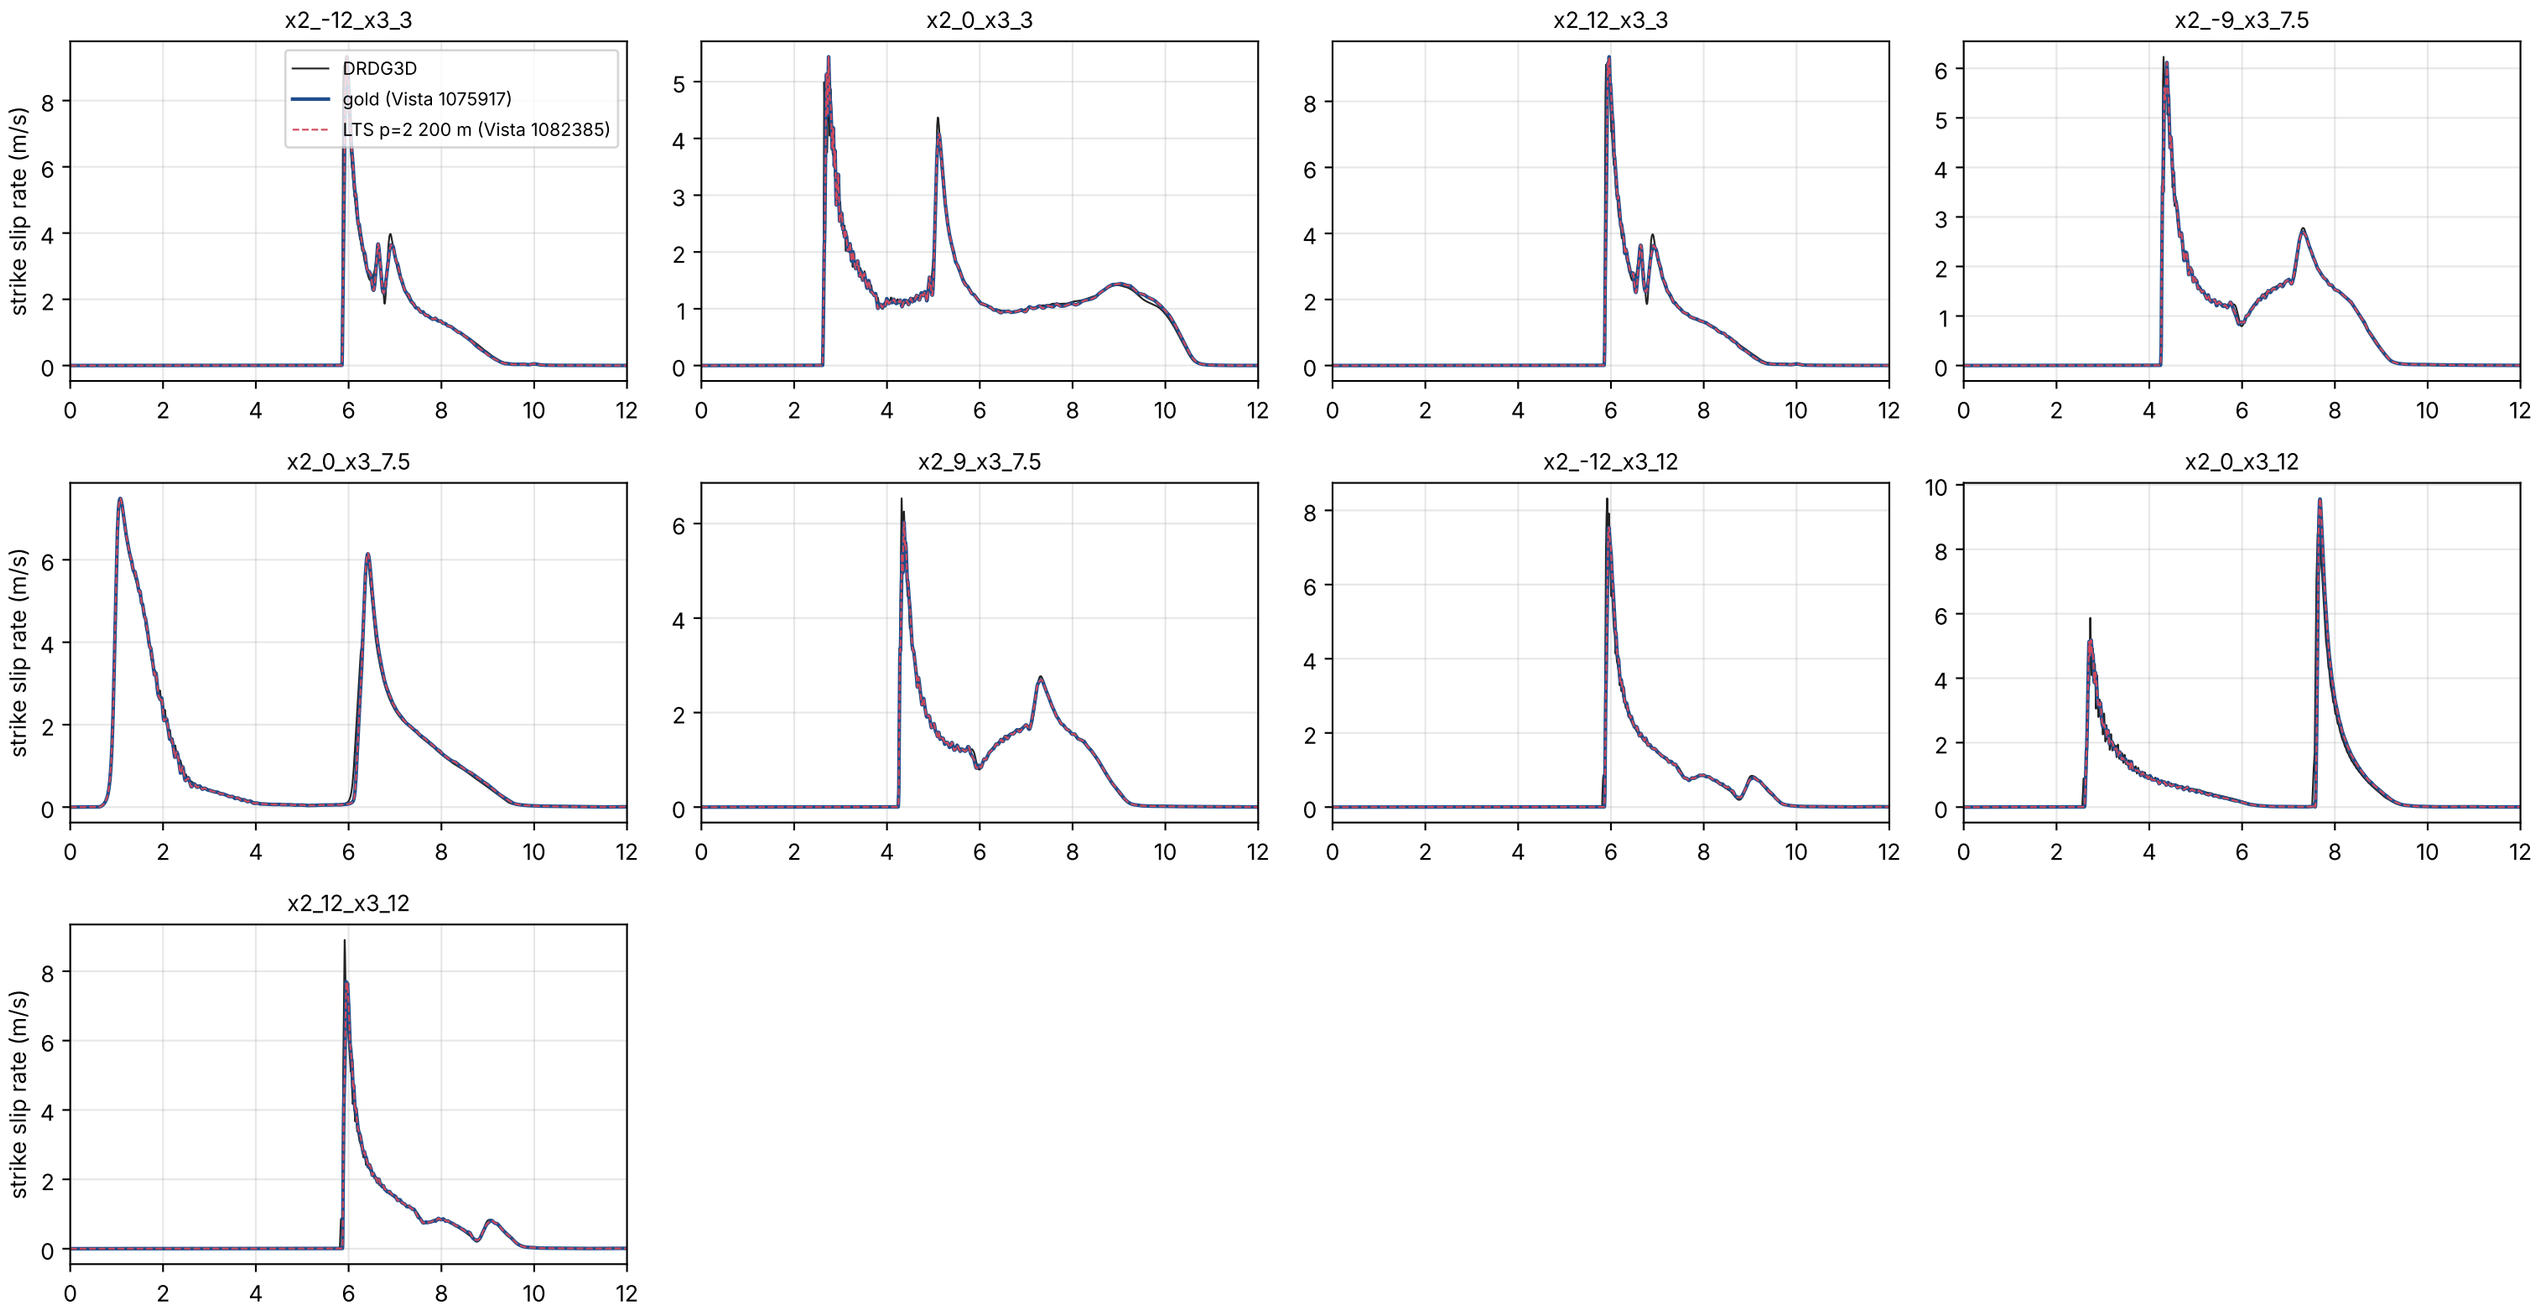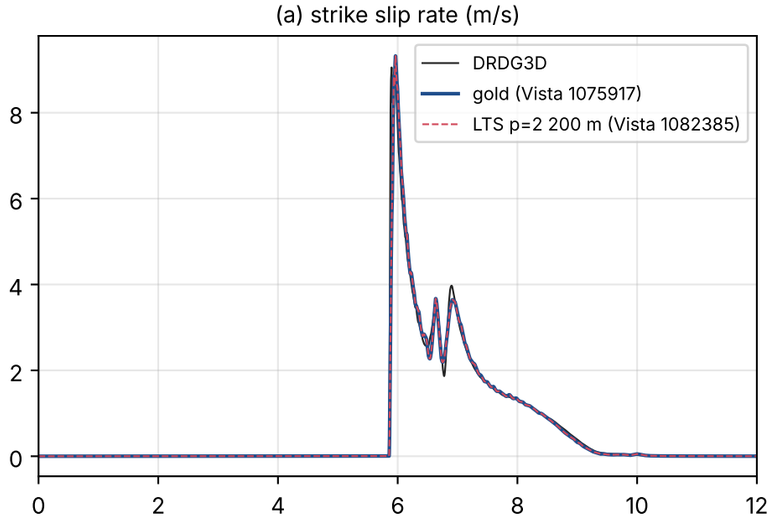


(b) strike slip rate (m/s), gold arrival 5.856 s -0.5 / +2.5 s

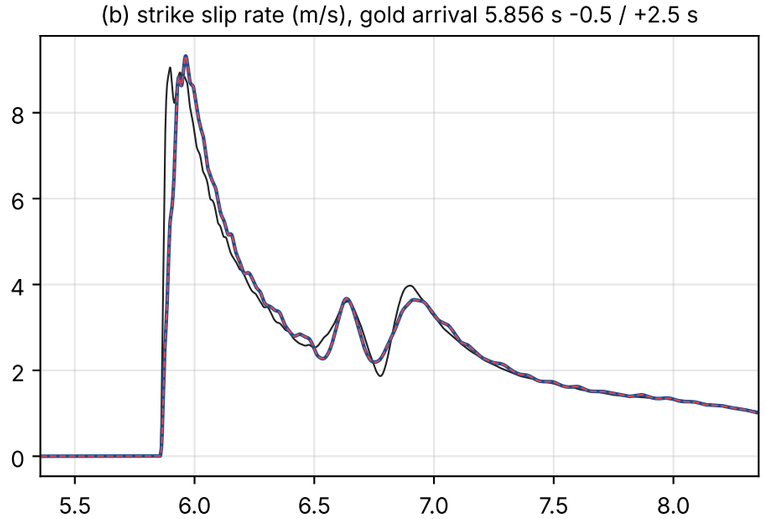


(c) strike slip (m)

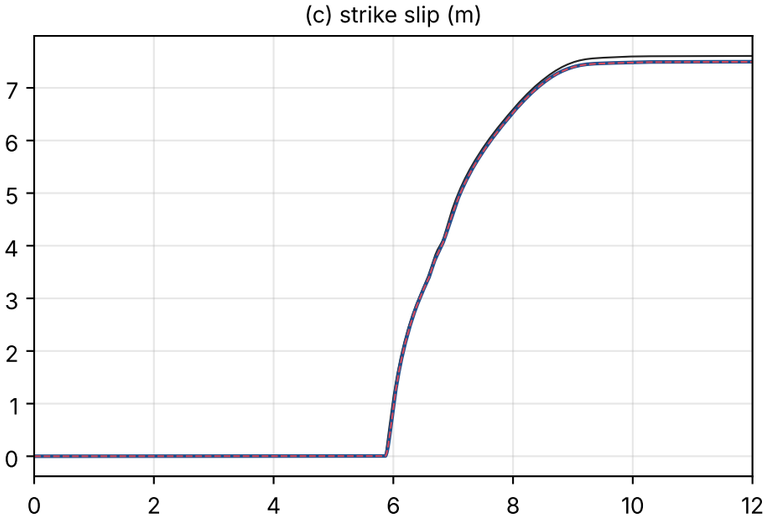


(d) strike shear stress (MPa)

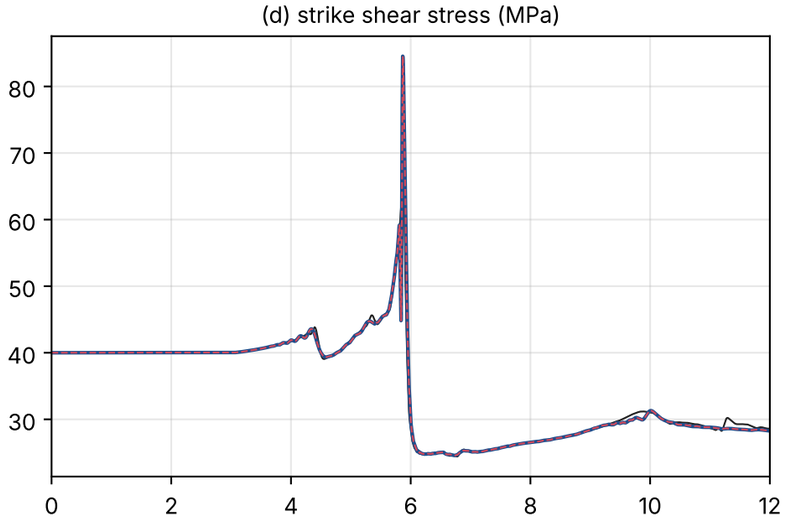


(e) normal stress, compression positive (MPa)

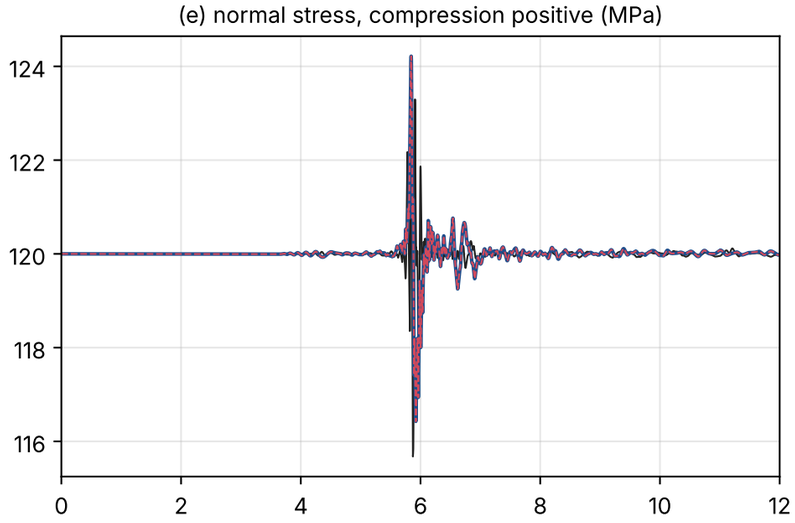


(f) dip slip rate (m/s)

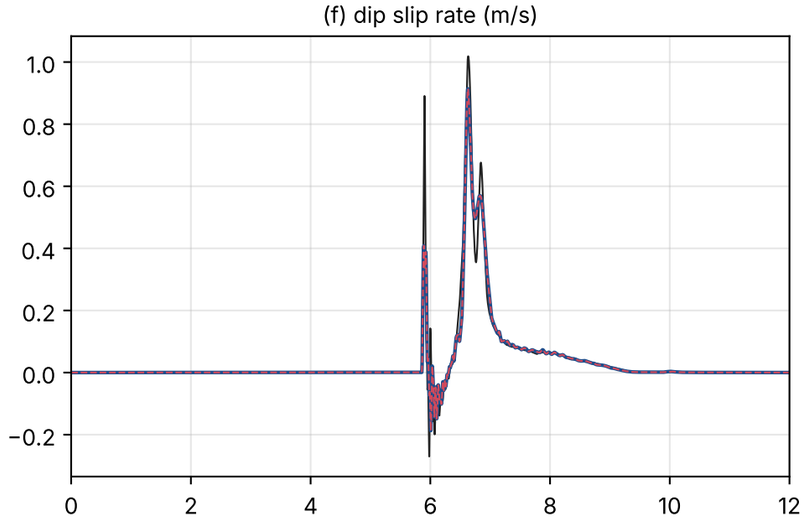


(g) LTS - gold, strike slip rate (m/s)

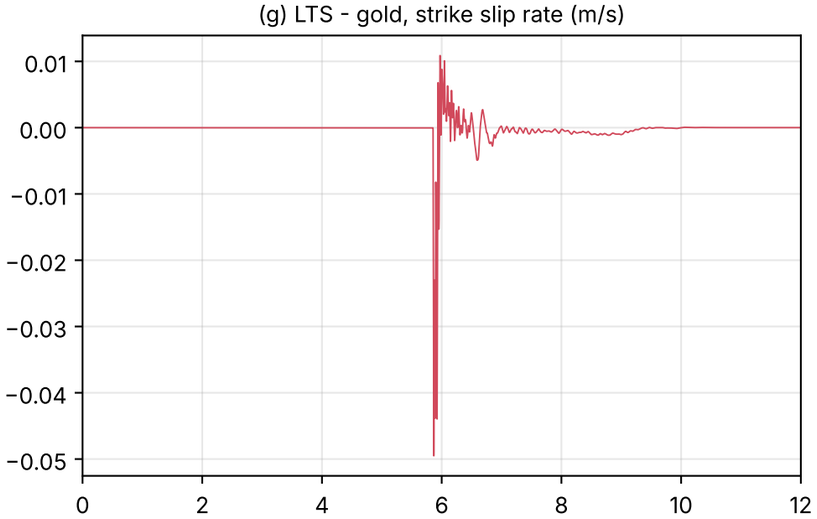


(h) LTS - gold, strike slip (m)

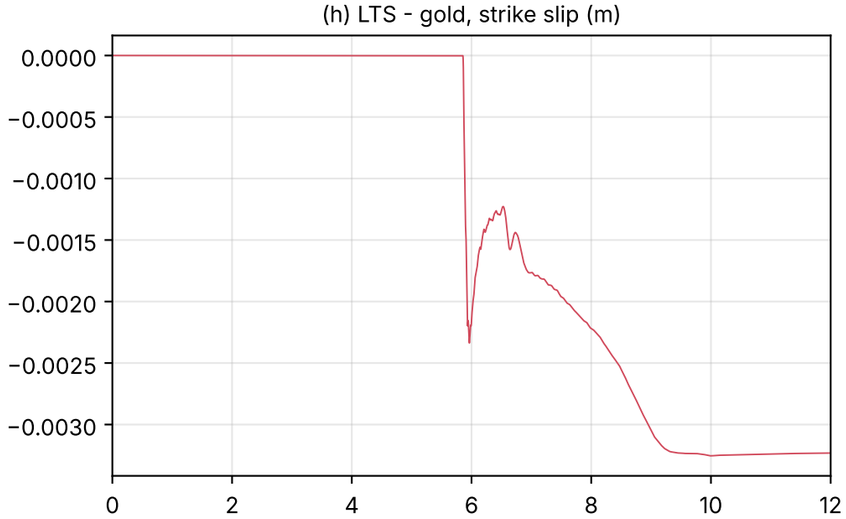


(i) LTS - gold, strike shear stress (MPa)

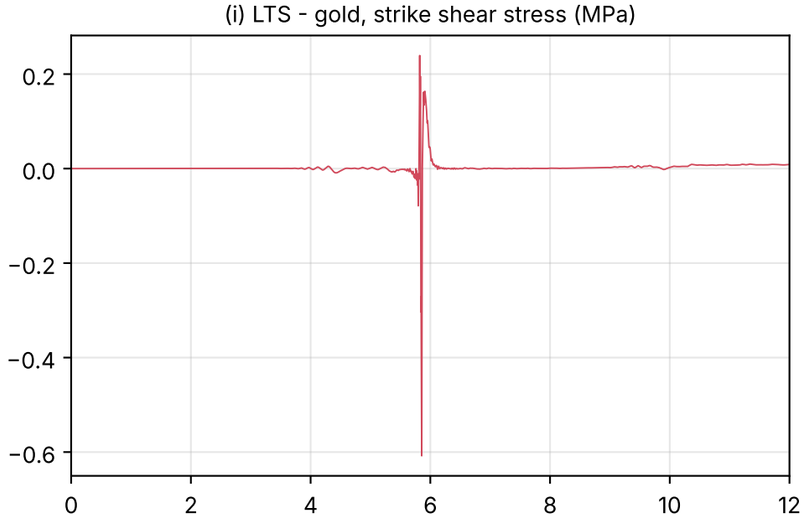


(j) LTS - gold, normal stress (MPa)

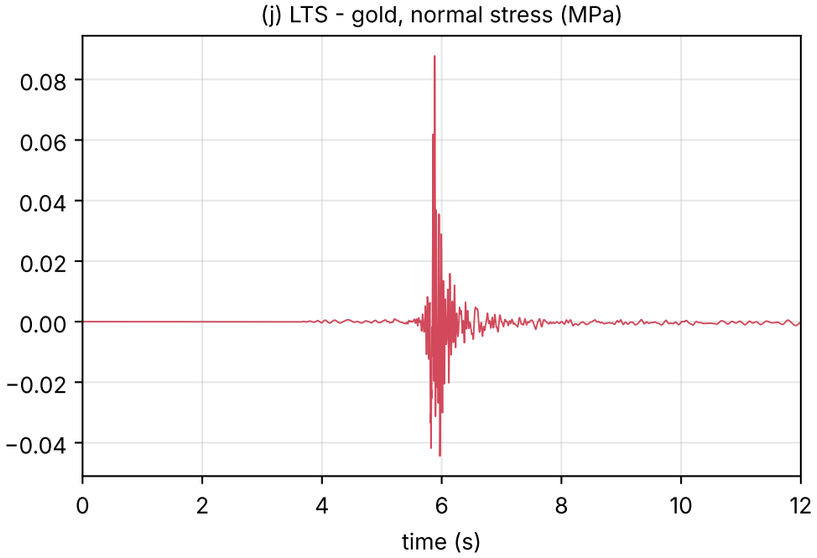

(k) period-2 part of strike shear stress (MPa), RMS per 0.25 s

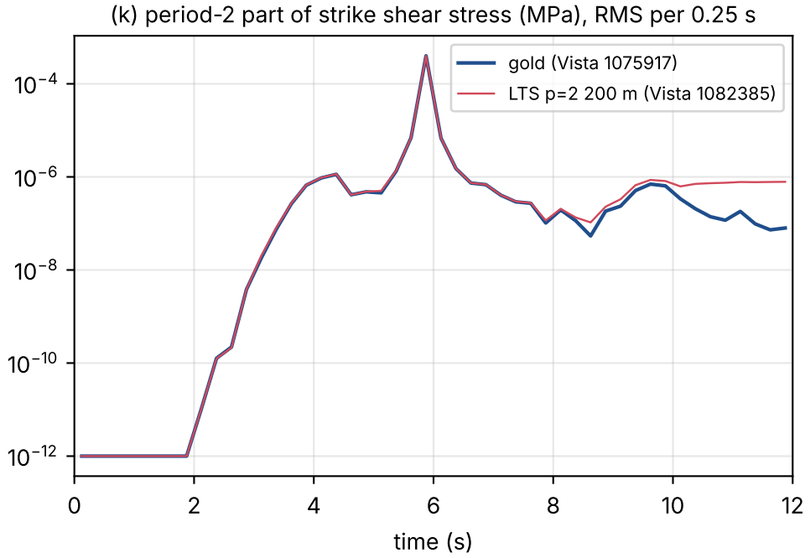


(l) period-2 part of normal stress (MPa), RMS per 0.25 s

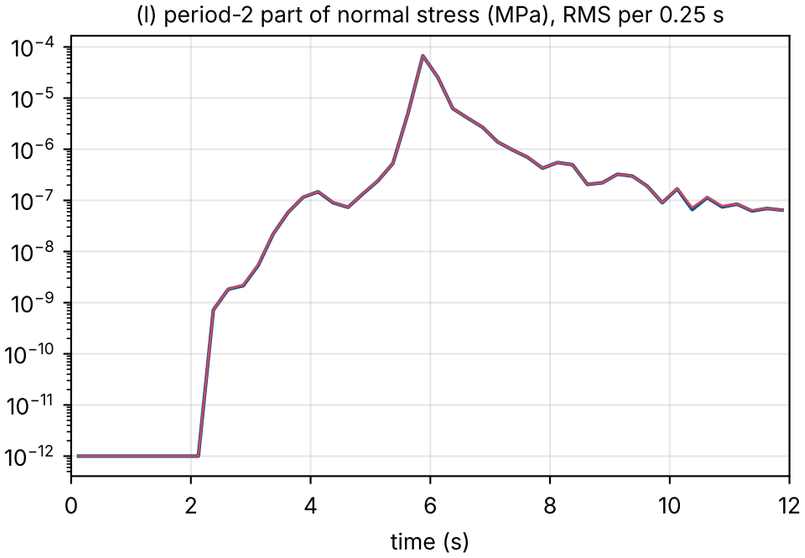


time (s) time (s) time (s)

SCEC TPV104 station x2_0_x3_3 (strike 0 km, depth 3 km)
LTS p=2 200 m (Vista 1082385) vs gold (Vista 1075917): arrival +0.11 ms peak -0.026 % final slip -0.017 %; vs DRDG3D: arrival -0.008 s peak +4.8 % slip -0.15 %

(a) strike slip rate (m/s)

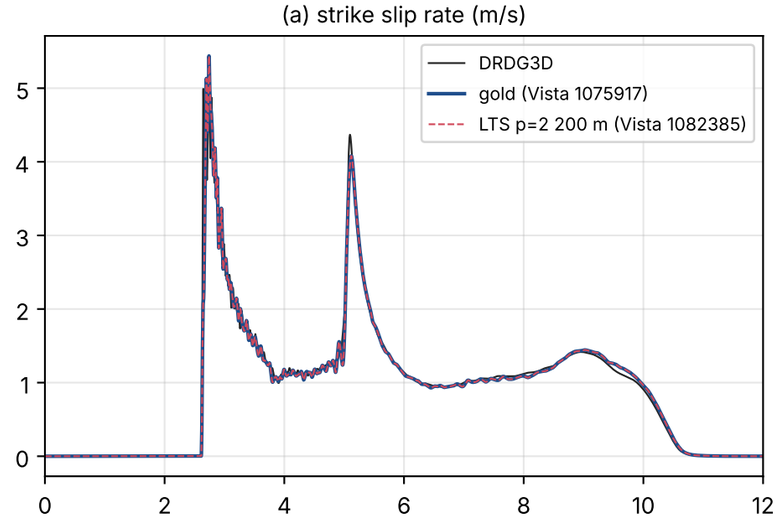


(b) strike slip rate (m/s), gold arrival 2.611 s -0.5 / +2.5 s

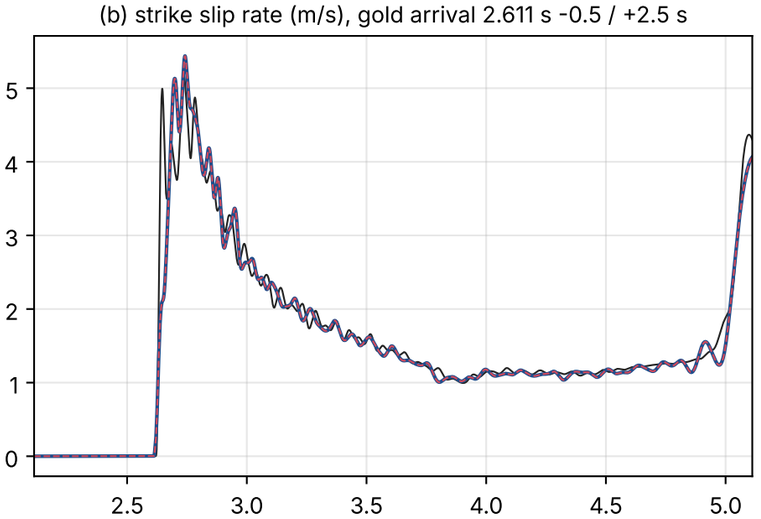


(c) strike slip (m)




(d) strike shear stress (MPa)

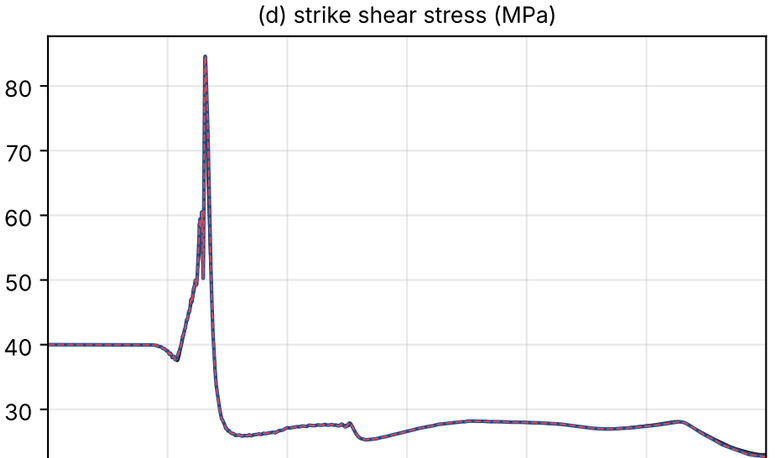


(e) normal stress, compression positive (MPa)

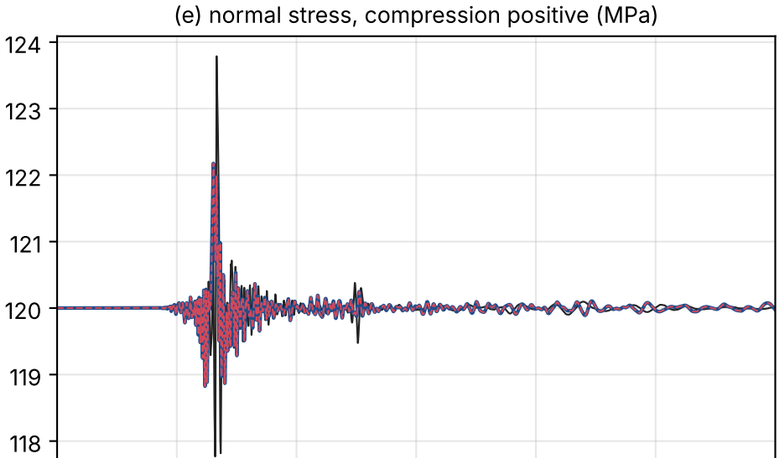


(f) dip slip rate (m/s)

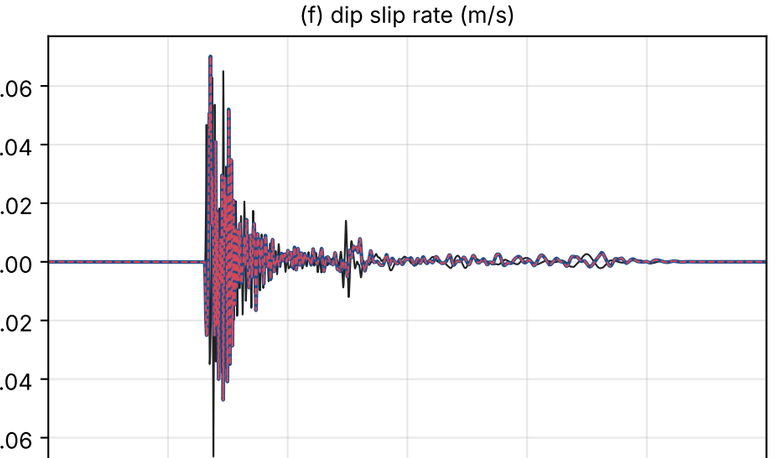


(g) LTS - gold, strike slip rate (m/s)

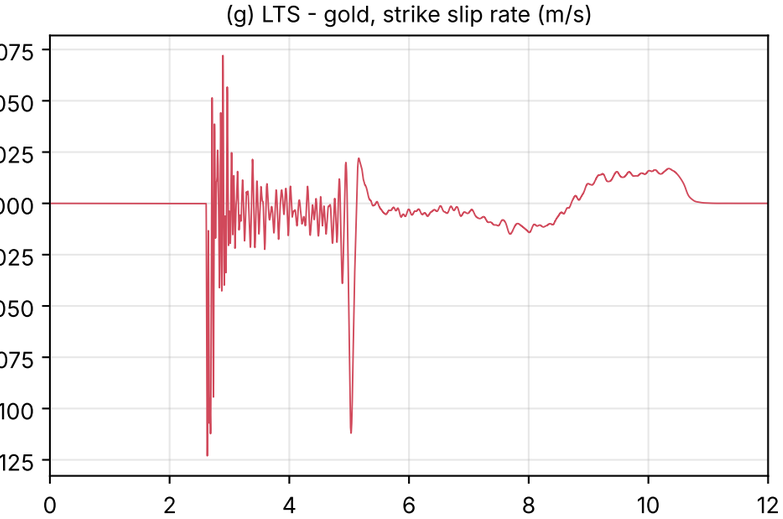


(h) LTS - gold, strike slip (m)

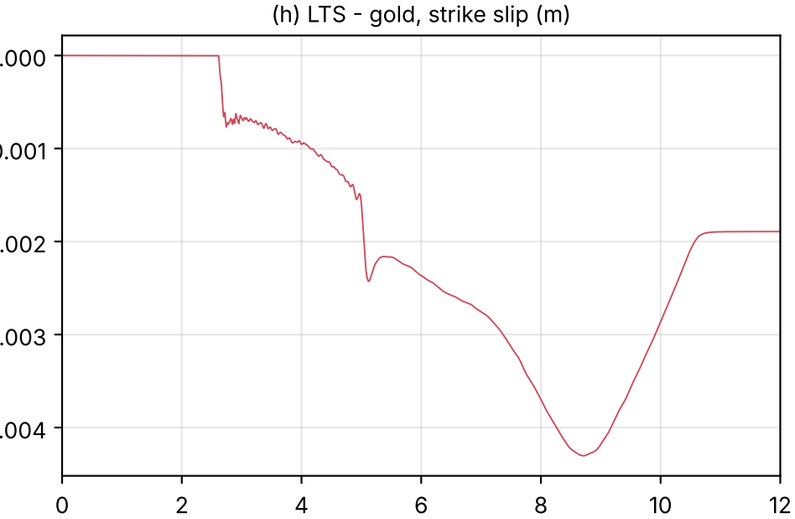


(i) LTS - gold, strike shear stress (MPa)

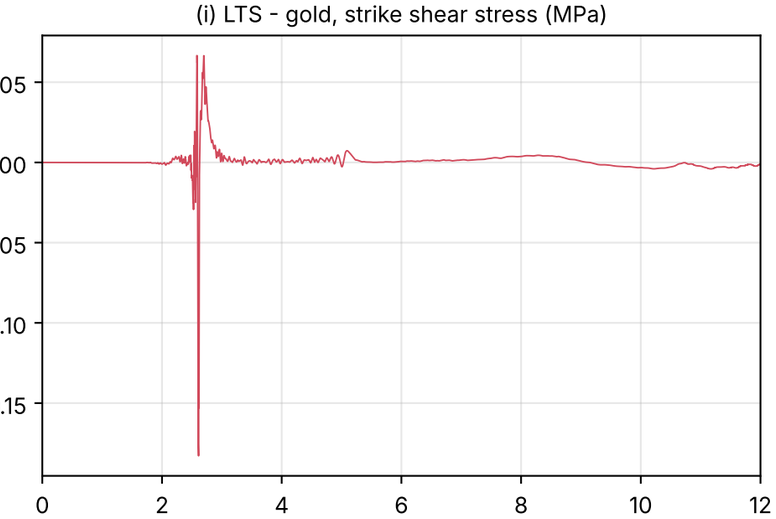


(j) LTS - gold, normal stress (MPa)

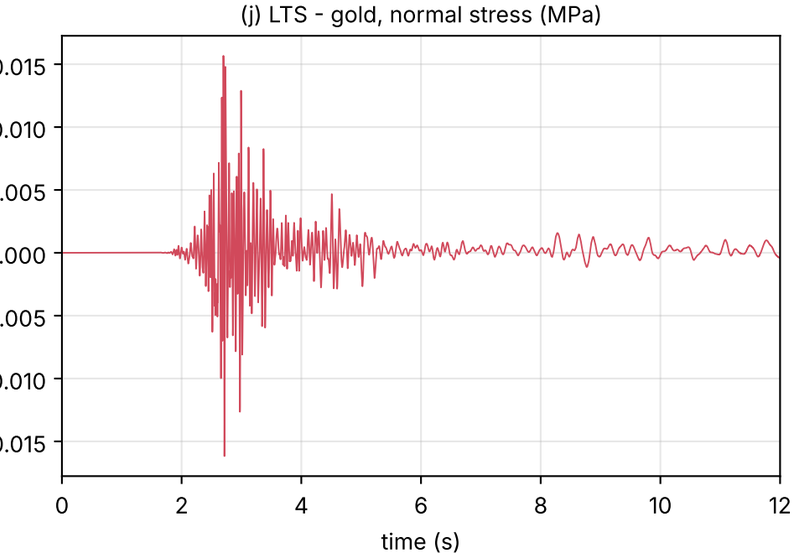

(k) period-2 part of strike shear stress (MPa), RMS per 0.25 s

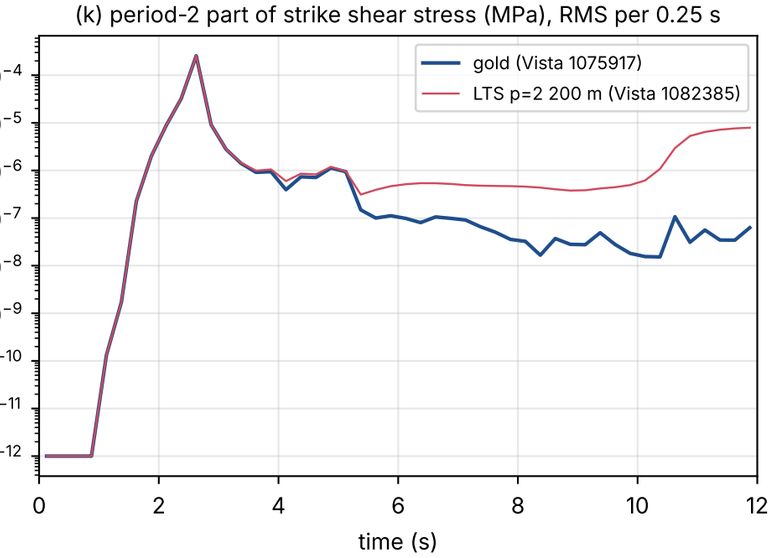


(l) period-2 part of normal stress (MPa), RMS per 0.25 s

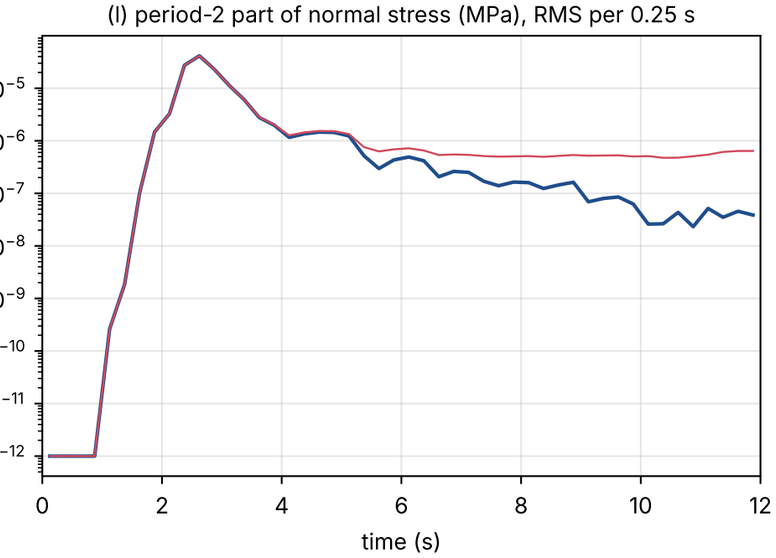


time (s)
time (s)
time (s)

SCEC TPV104 station x2_12_x3_3 (strike 12 km, depth 3 km)
LTS p=2 200 m (Vista 1082385) vs gold (Vista 1075917): arrival +0.34 ms peak -0.007 % final slip -0.043 %; vs DRDG3D: arrival -0.000 s peak +2.0 % slip -1.48 %


(a) strike slip rate (m/s)

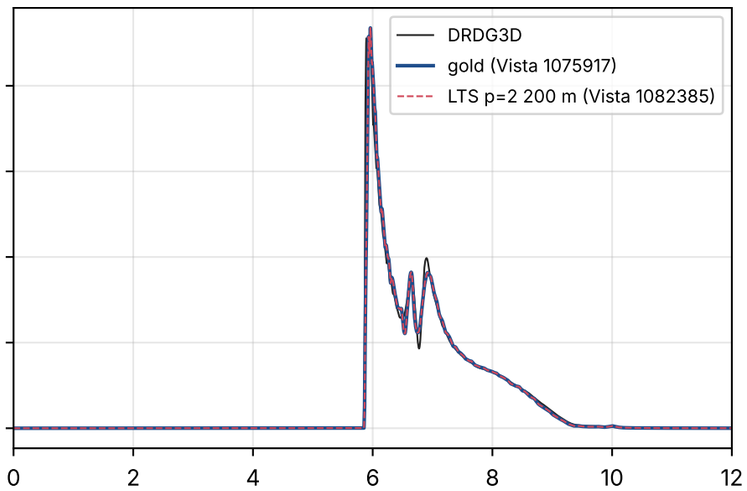


(b) strike slip rate (m/s), gold arrival 5.853 s -0.5 / +2.5 s

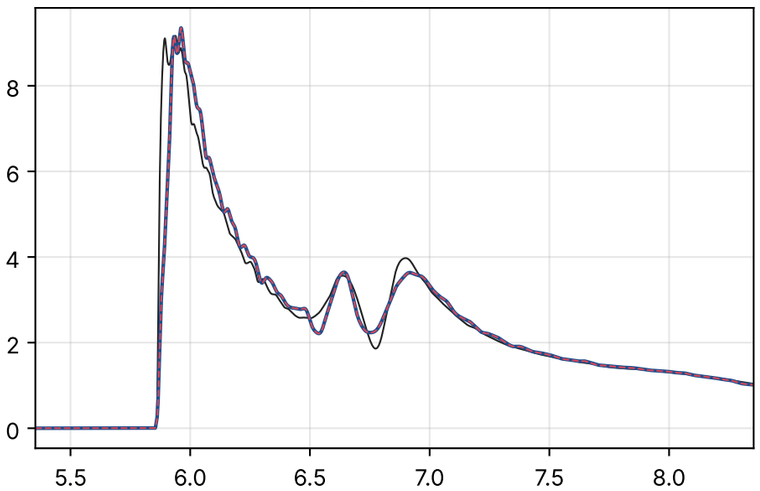


(c) strike slip (m)

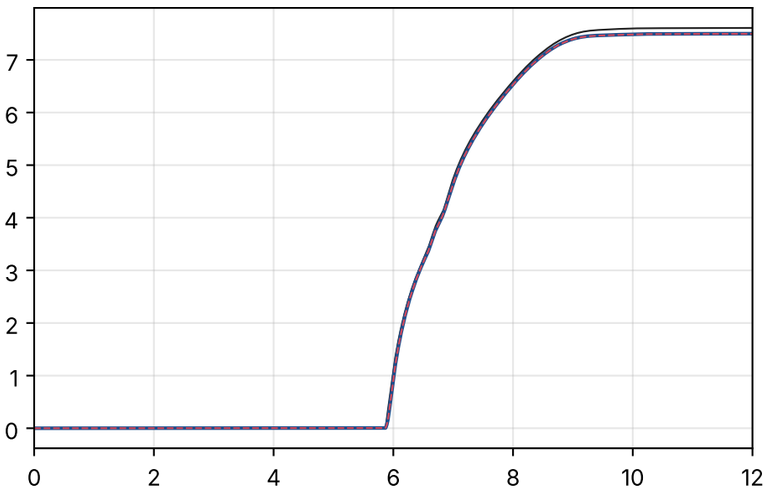


(d) strike shear stress (MPa)

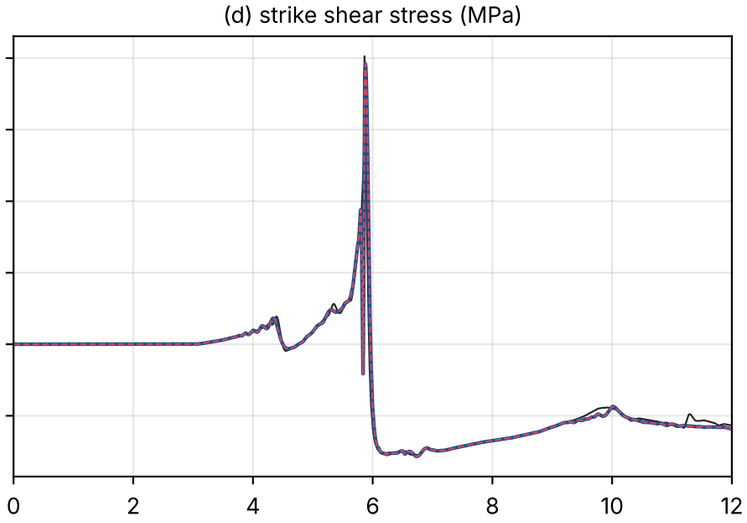


(e) normal stress, compression positive (MPa)

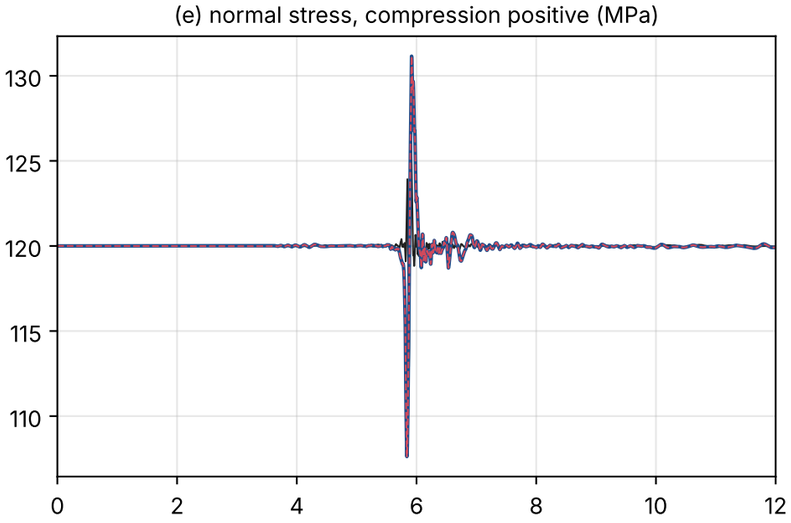


(f) dip slip rate (m/s)

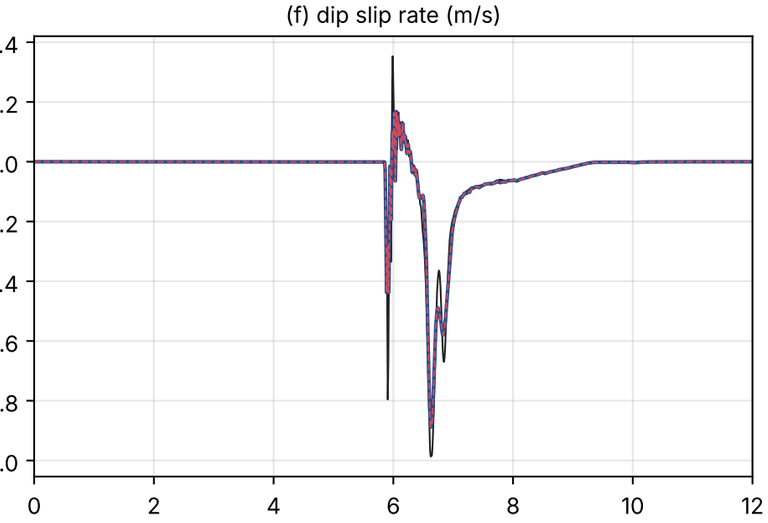


(g) LTS - gold, strike slip rate (m/s)

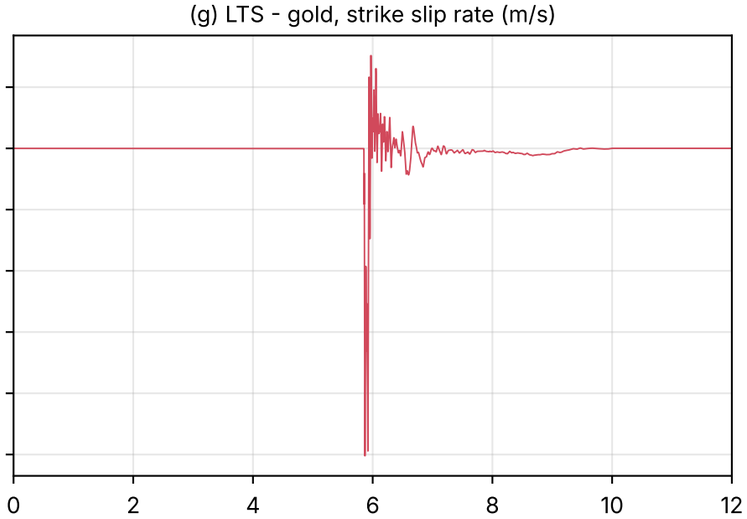


(h) LTS - gold, strike slip (m)

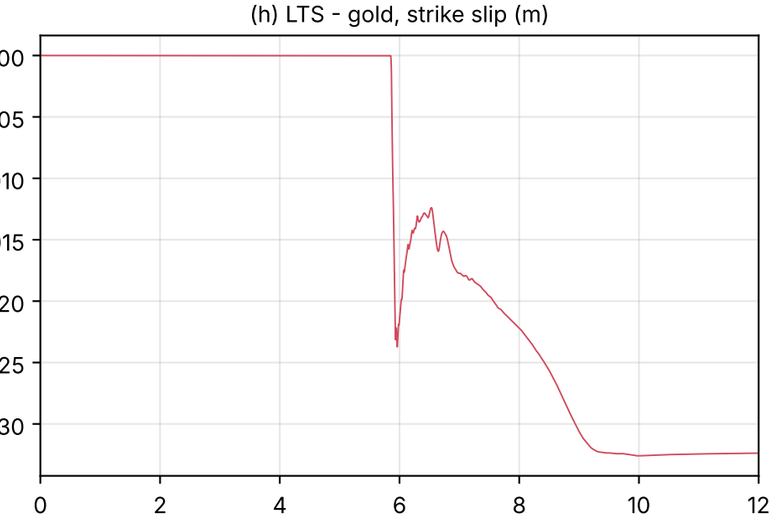


(i) LTS - gold, strike shear stress (MPa)

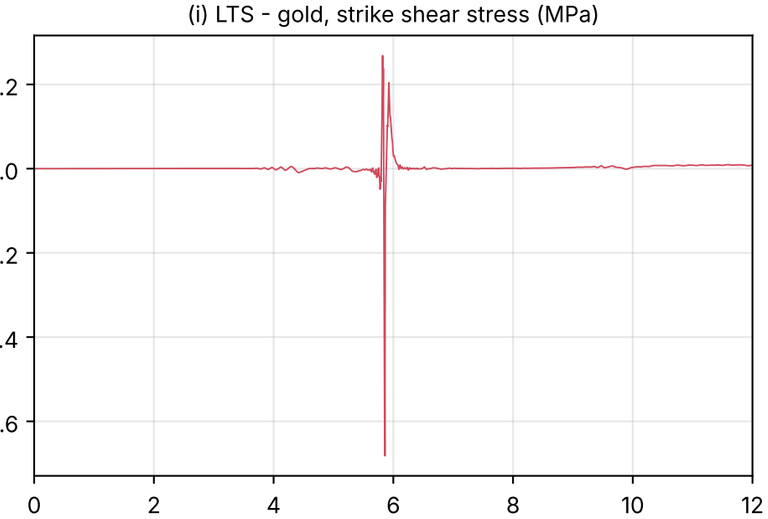


(j) LTS - gold, normal stress (MPa)

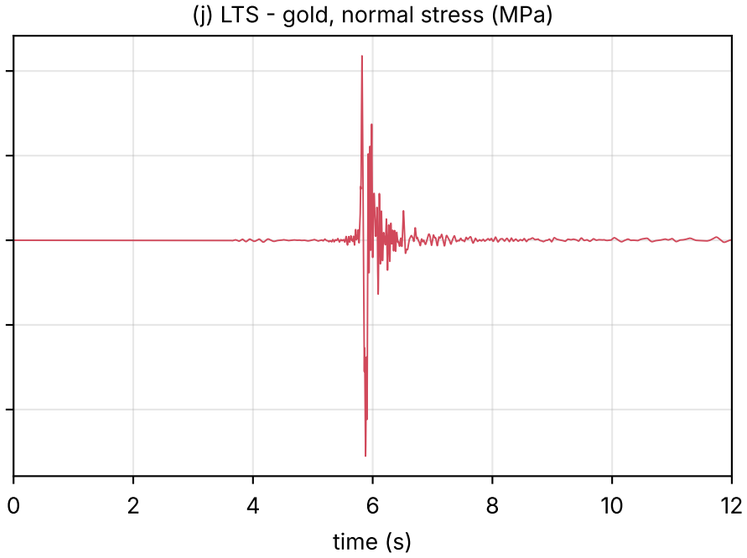

(k) period-2 part of strike shear stress (MPa), RMS per 0.25 s

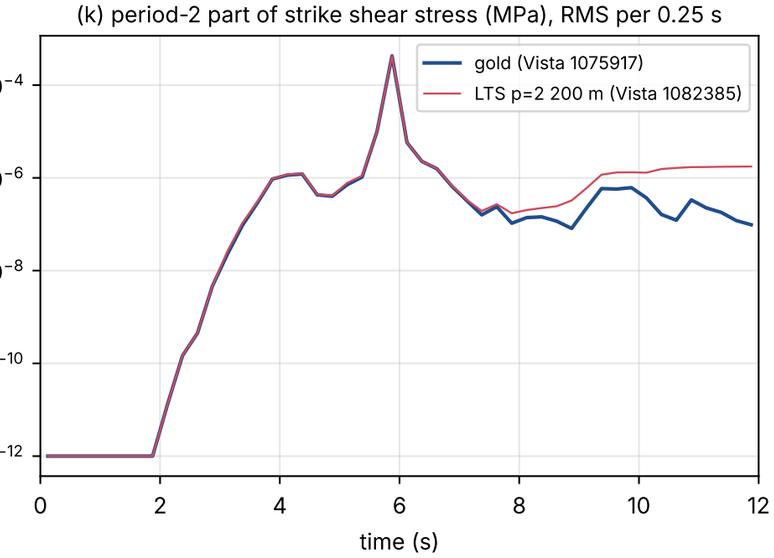

(l) period-2 part of normal stress (MPa), RMS per 0.25 s

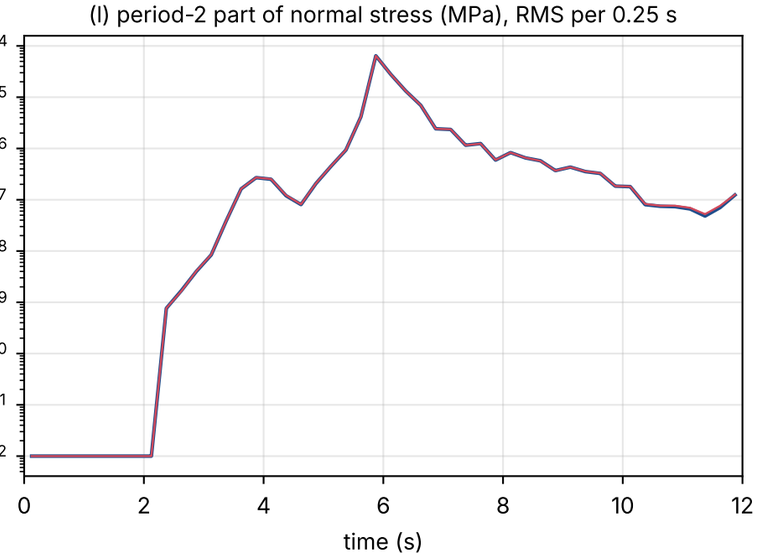


time (s)


time (s)


time (s)

SCEC TPV104 station x2_-9_x3_7.5 (strike -9 km, depth 7.5 km)
LTS p=2 200 m (Vista 1082385) vs gold (Vista 1075917): arrival +0.11 ms peak -0.032 % final slip -0.029 %; vs DRDG3D: arrival +0.012 s peak -1.9 % slip -0.51 %

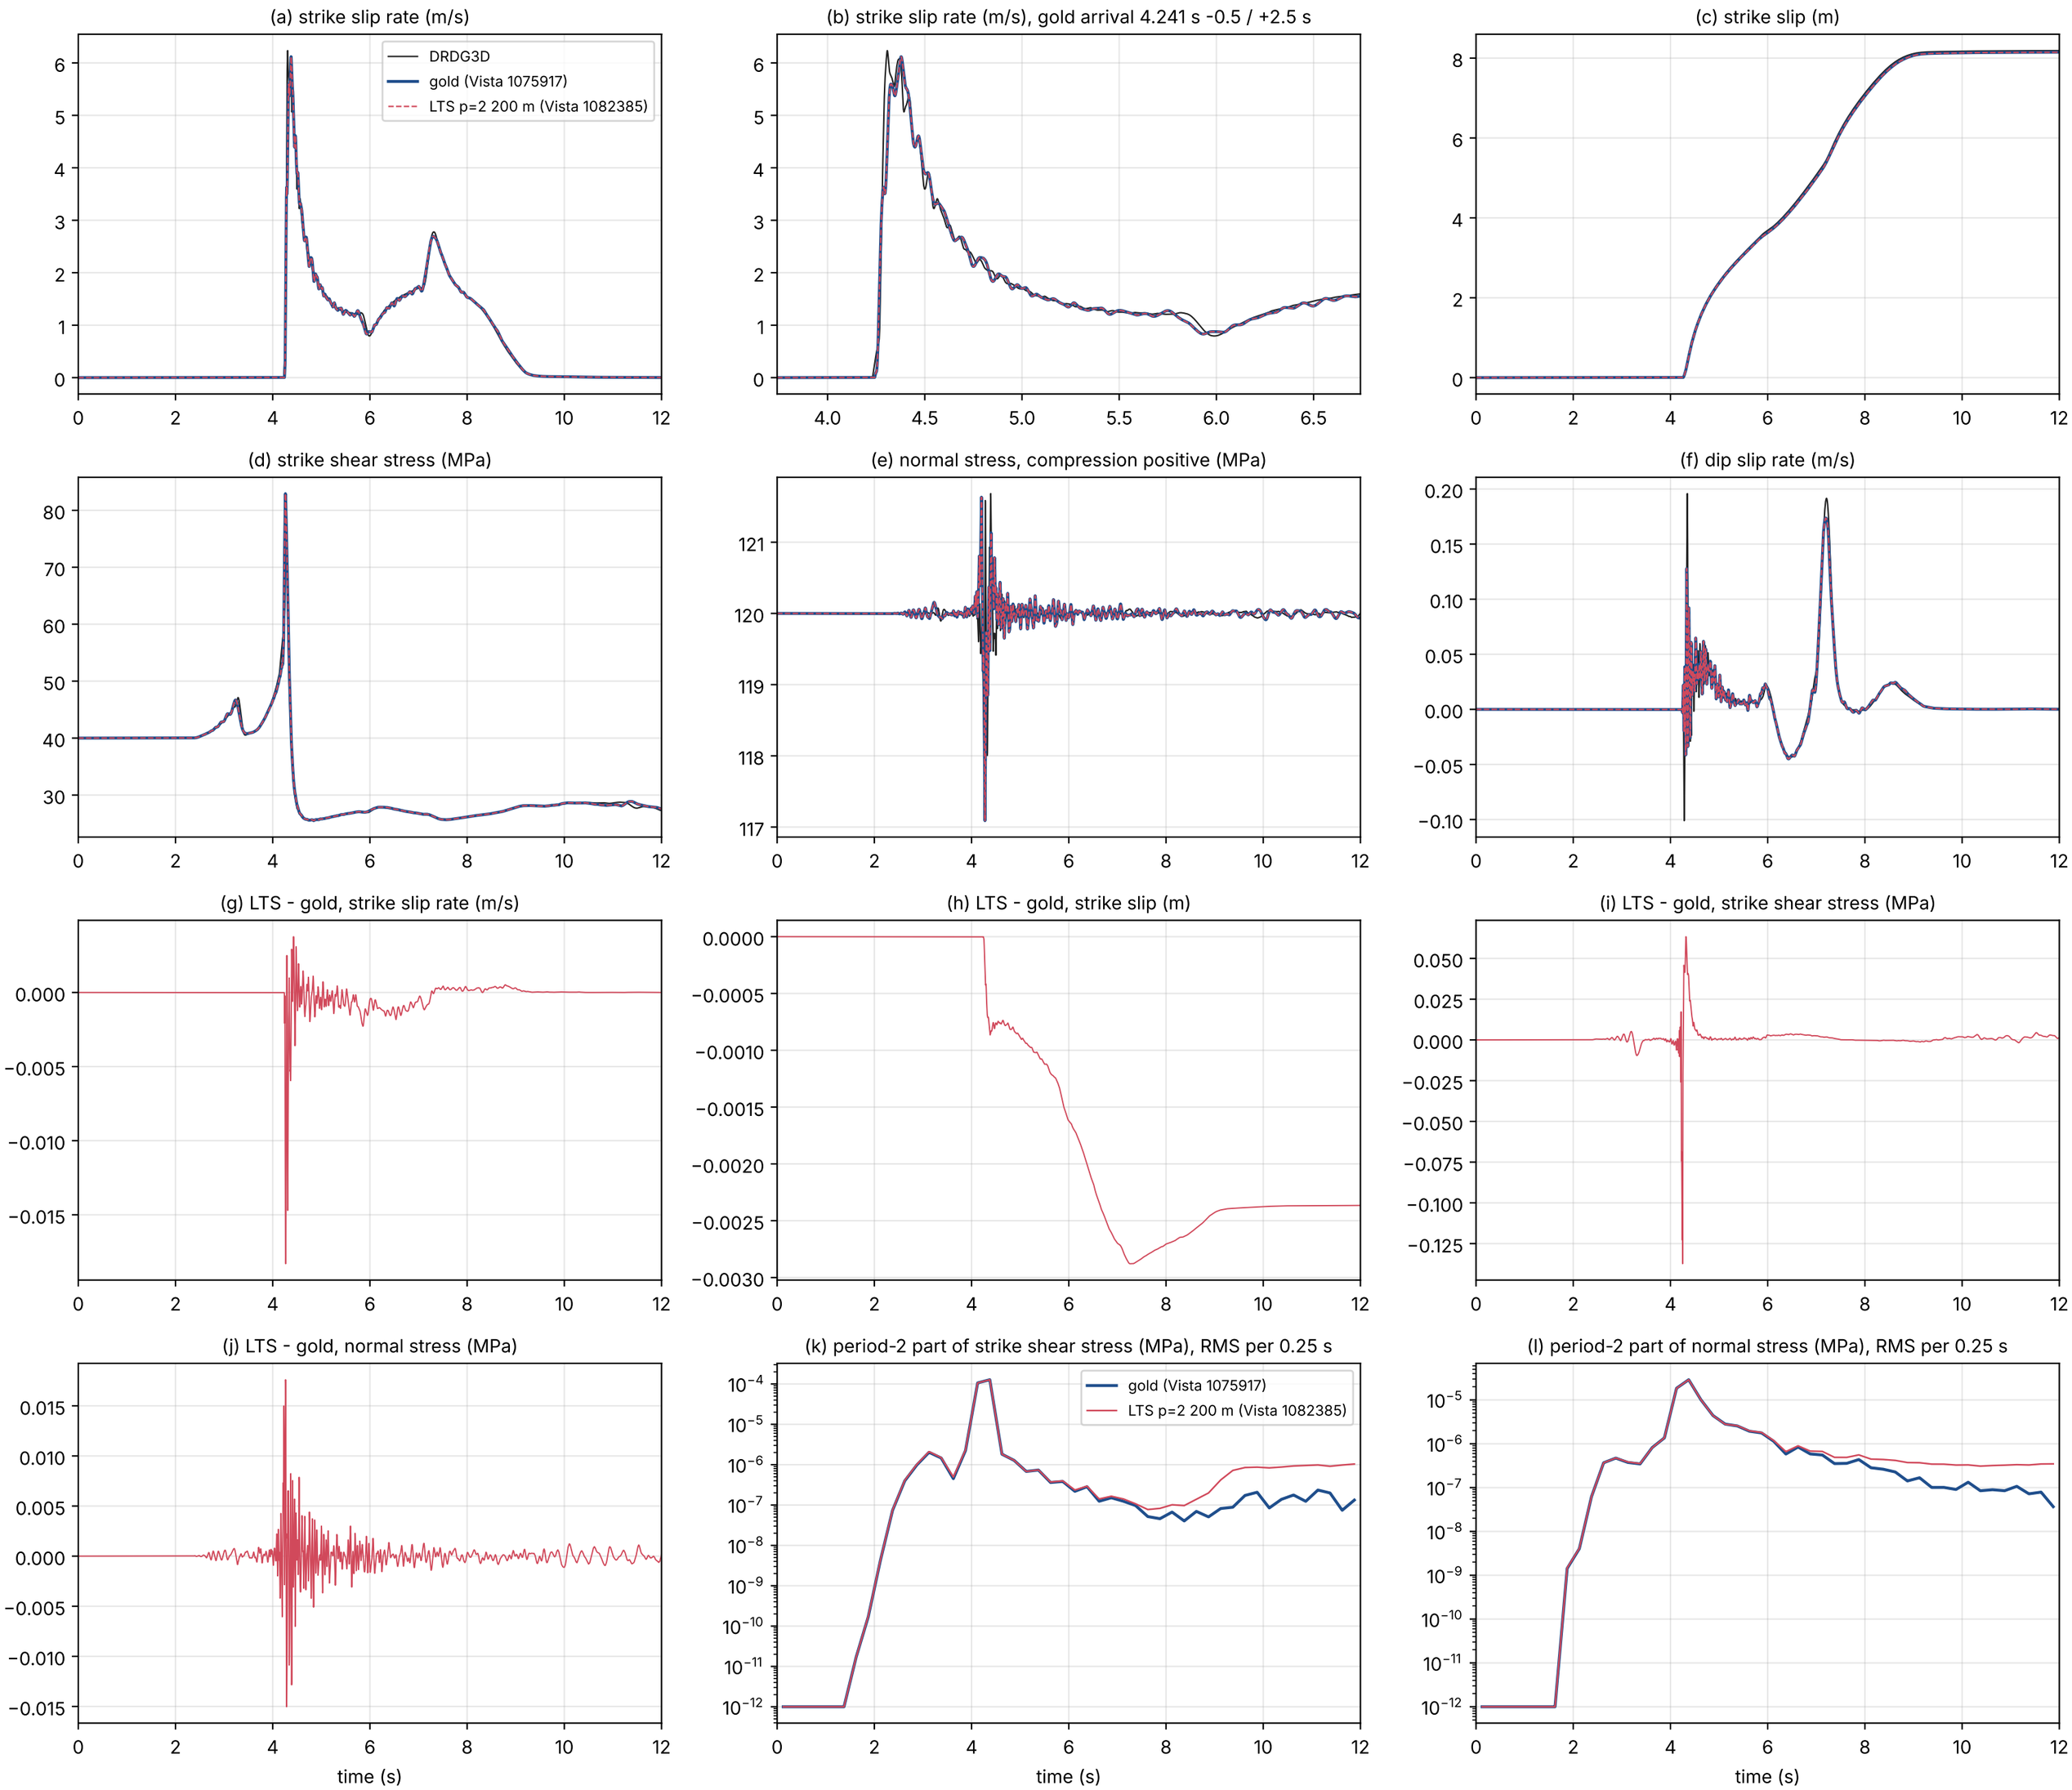



SCEC TPV104 station x2_0_x3_7.5 (strike 0 km, depth 7.5 km)
LTS p=2 200 m (Vista 1082385) vs gold (Vista 1075917): arrival +0.00 ms peak -0.004 % final slip -0.018 %; vs DRDG3D: arrival -0.003 s peak +0.2 % slip -0.11 %

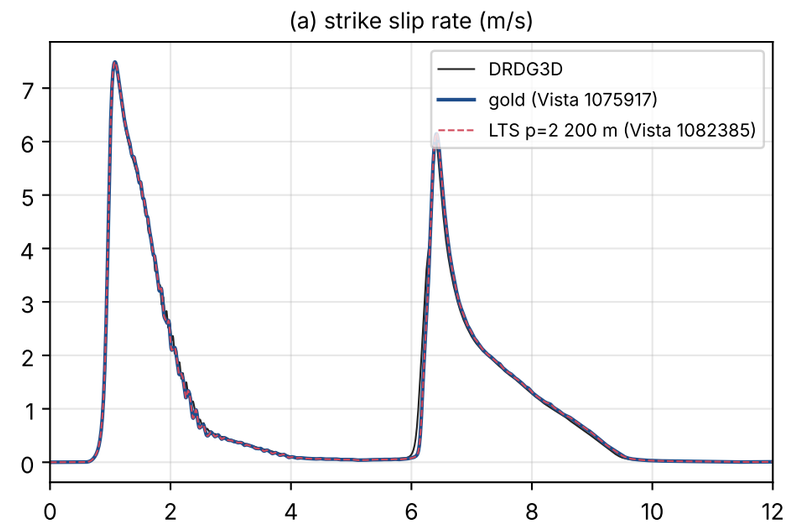


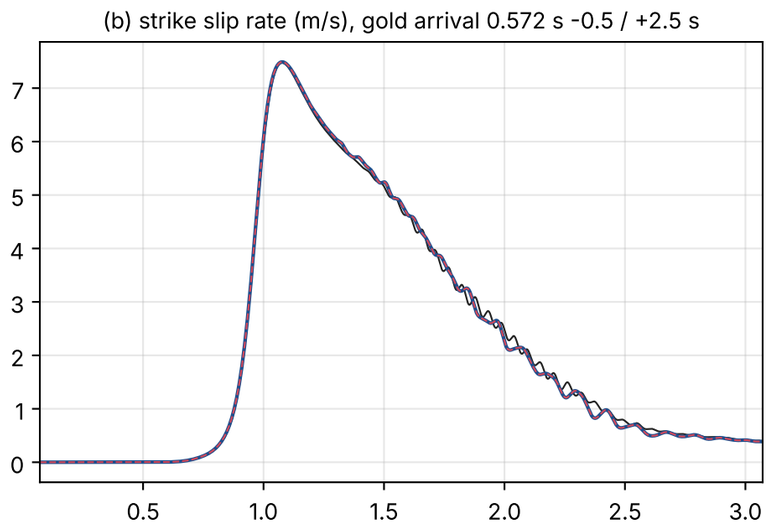





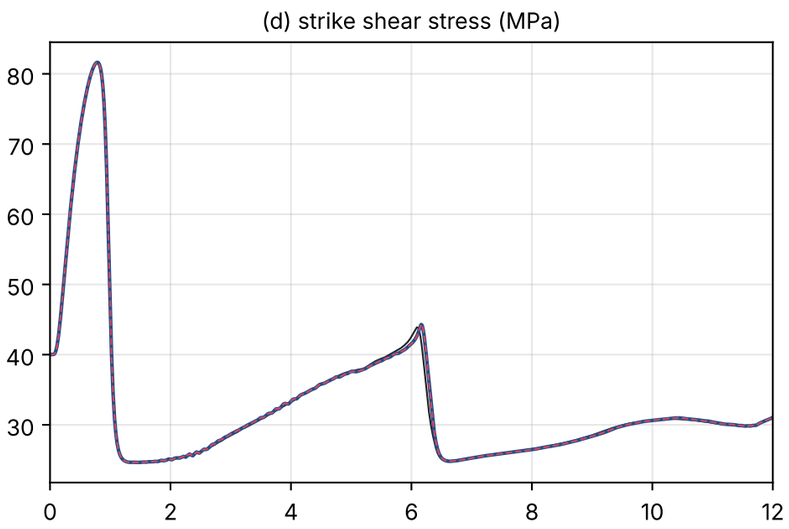


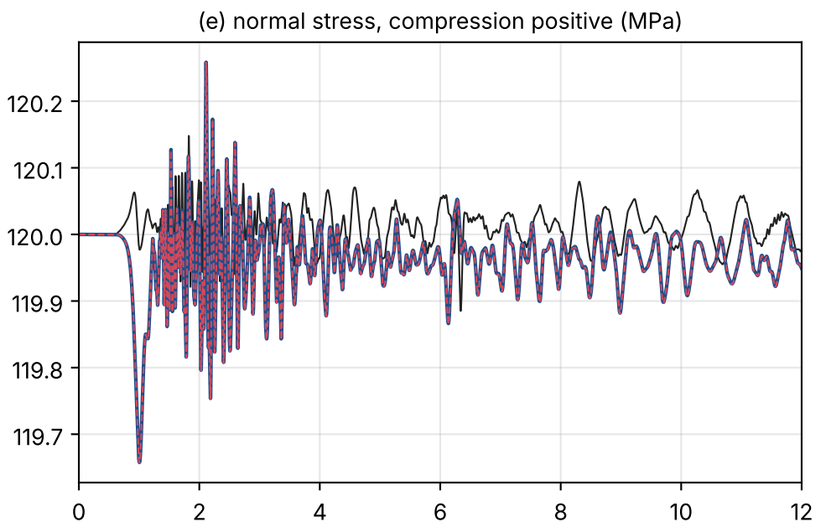


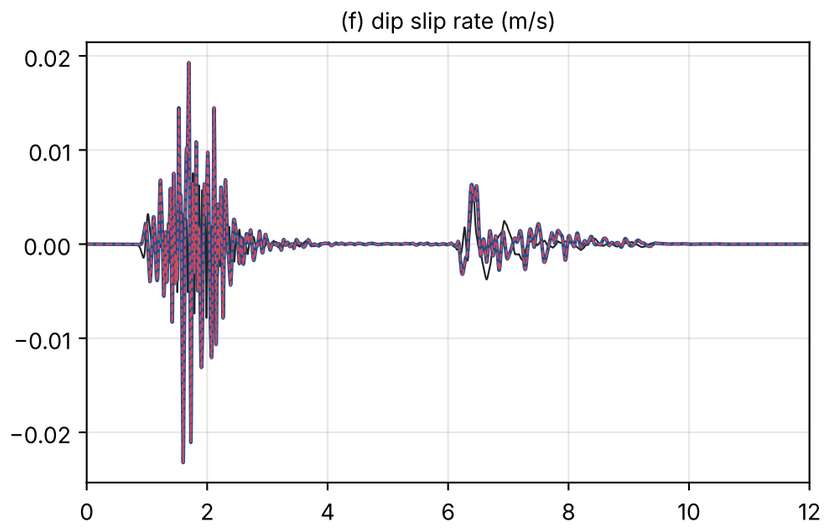


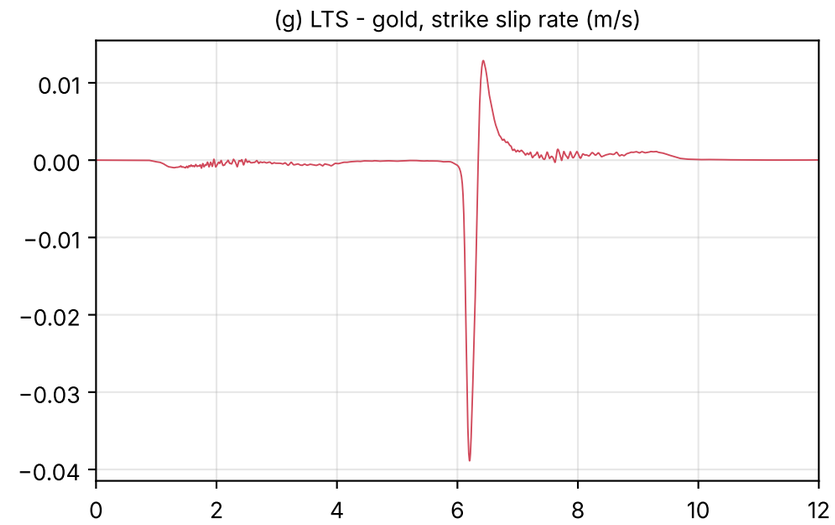


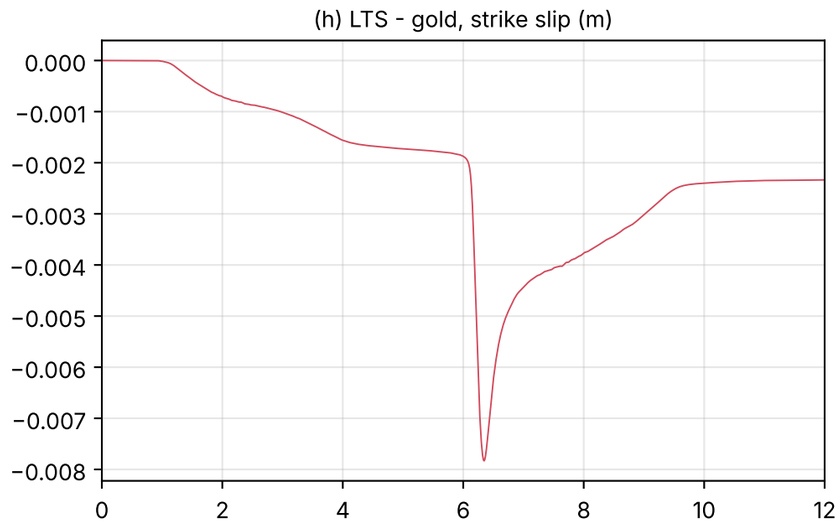

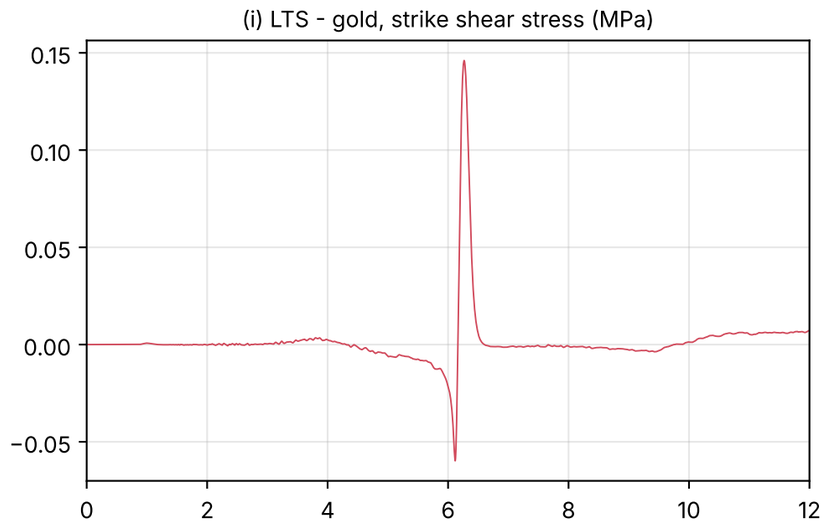


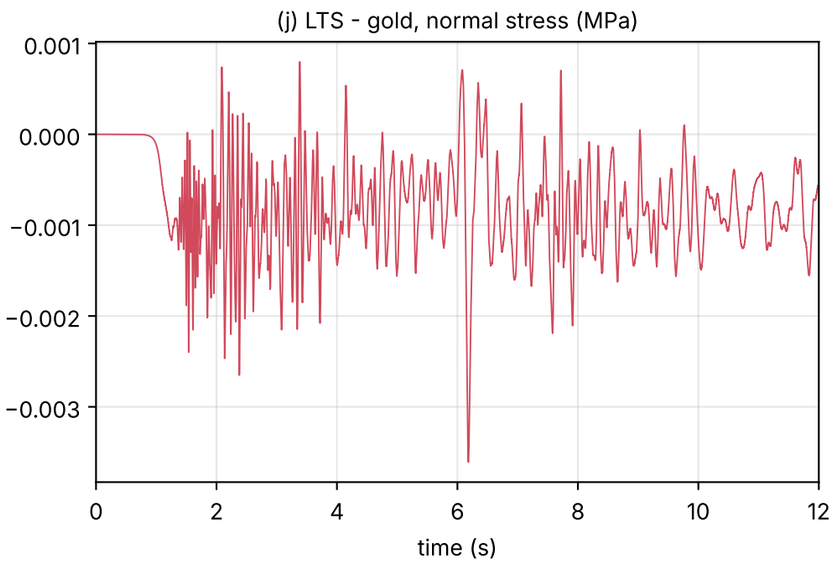

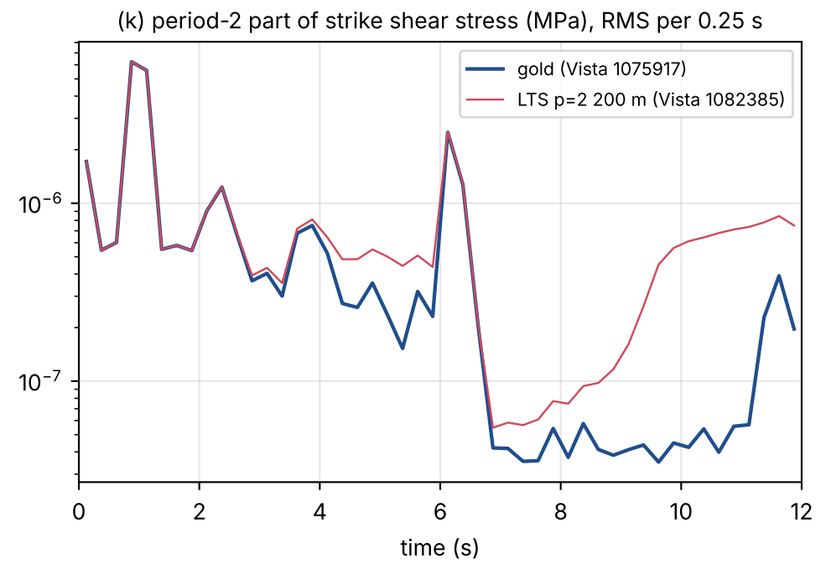


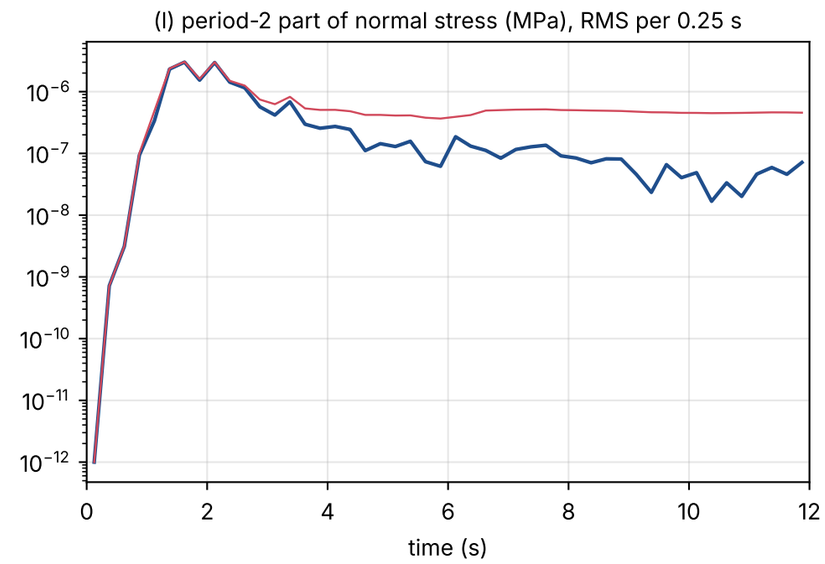



SCEC TPV104 station x2_9_x3_7.5 (strike 9 km, depth 7.5 km)
LTS p=2 200 m (Vista 1082385) vs gold (Vista 1075917): arrival +0.11 ms peak -0.041 % final slip -0.029 %; vs DRDG3D: arrival +0.012 s peak -7.8 % slip -0.51 %

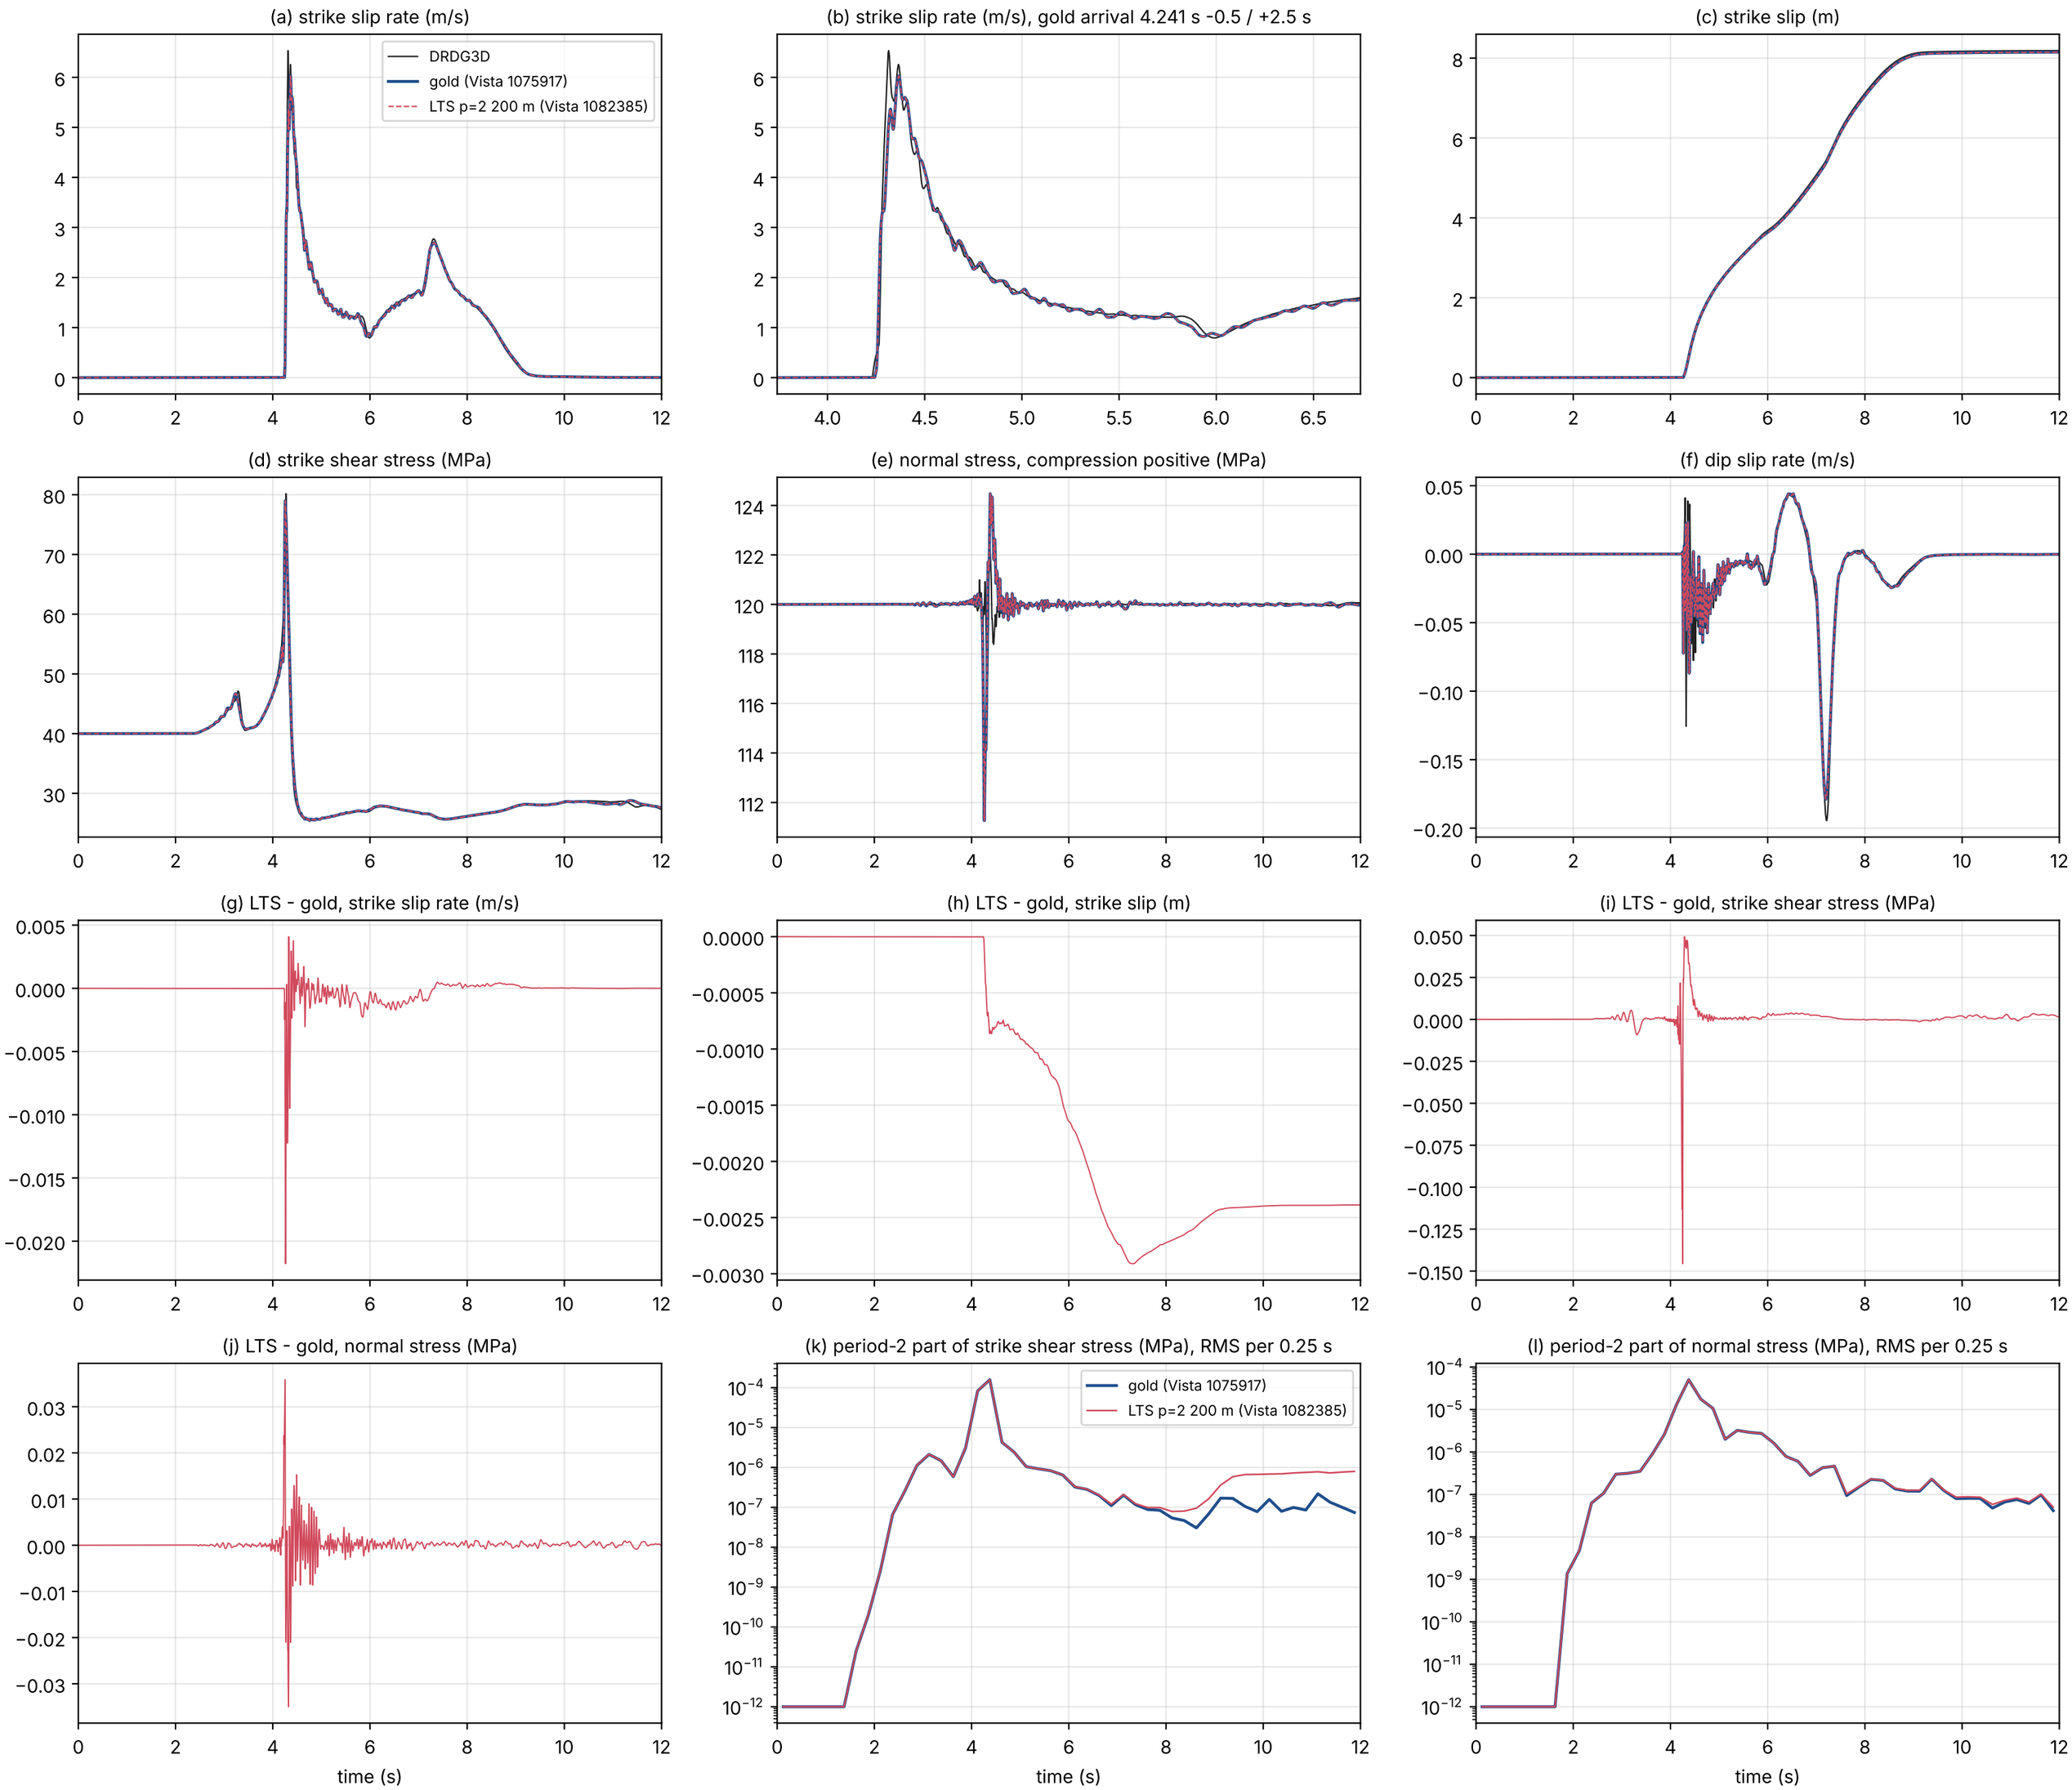



SCEC TPV104 station x2_-12_x3_12 (strike -12 km, depth 12 km)
LTS p=2 200 m (Vista 1082385) vs gold (Vista 1075917): arrival +0.23 ms peak -0.034 % final slip -0.017 %; vs DRDG3D: arrival +0.051 s peak -9.5 % slip -0.99 %

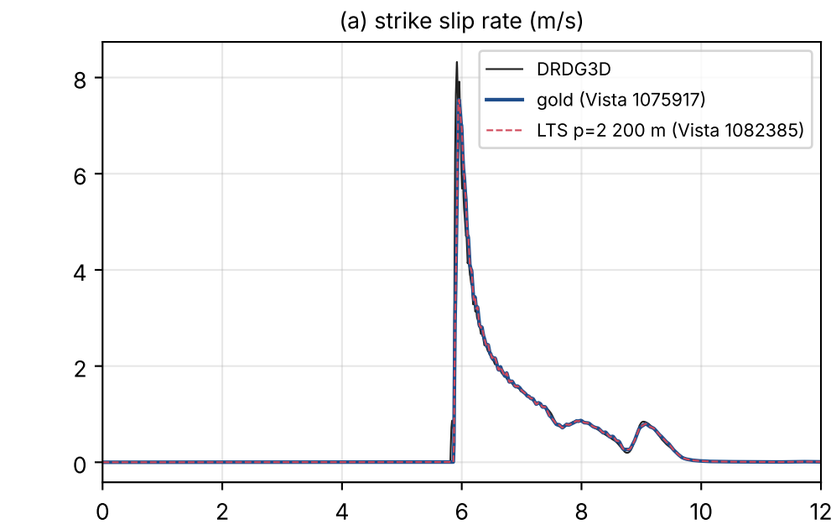


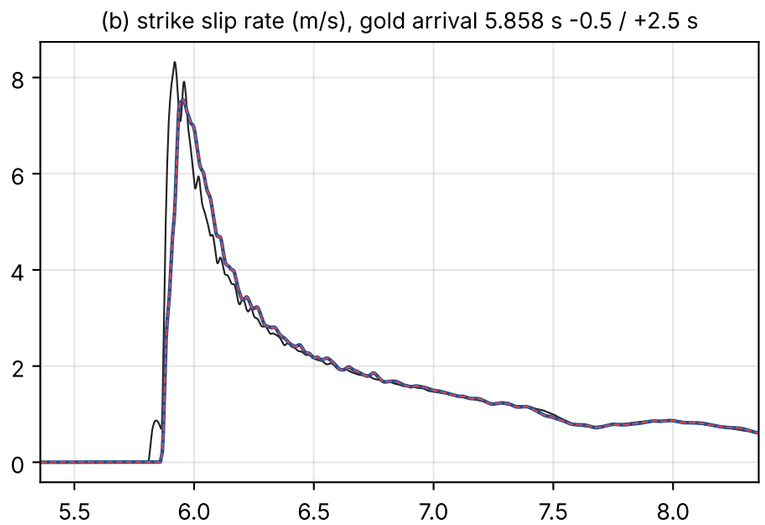


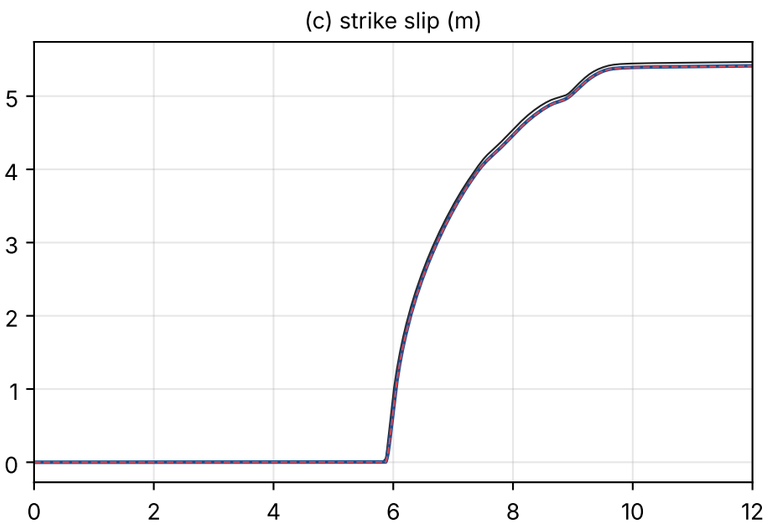


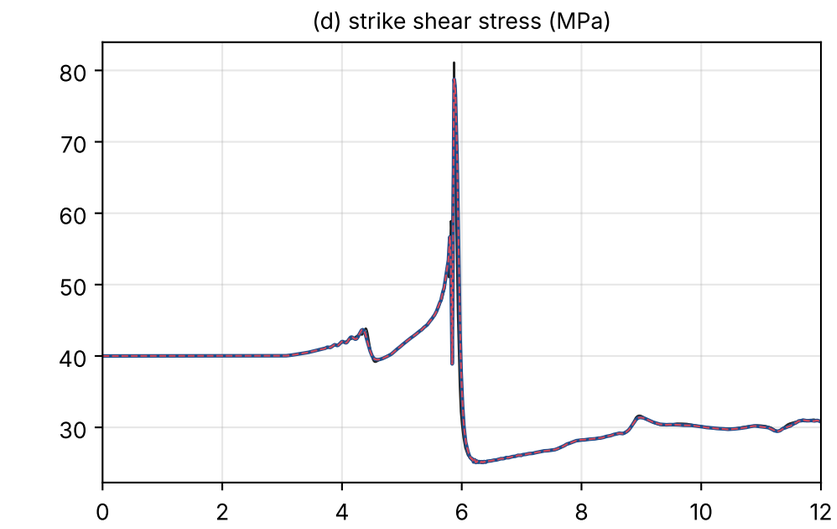


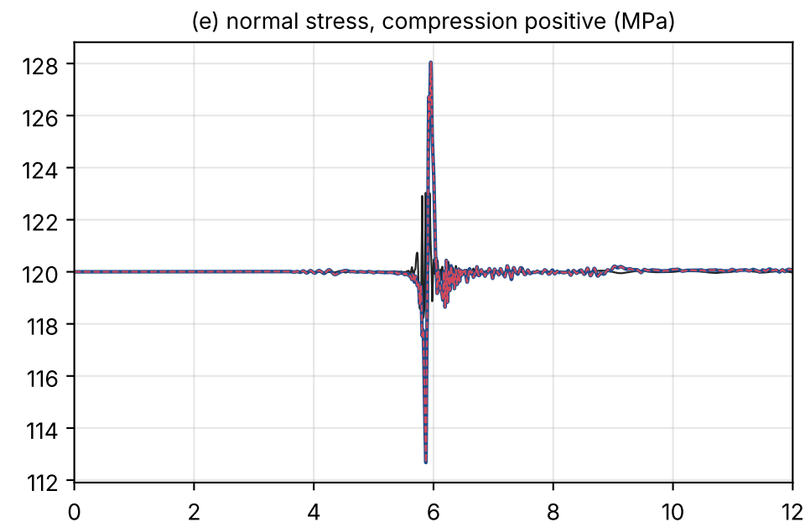


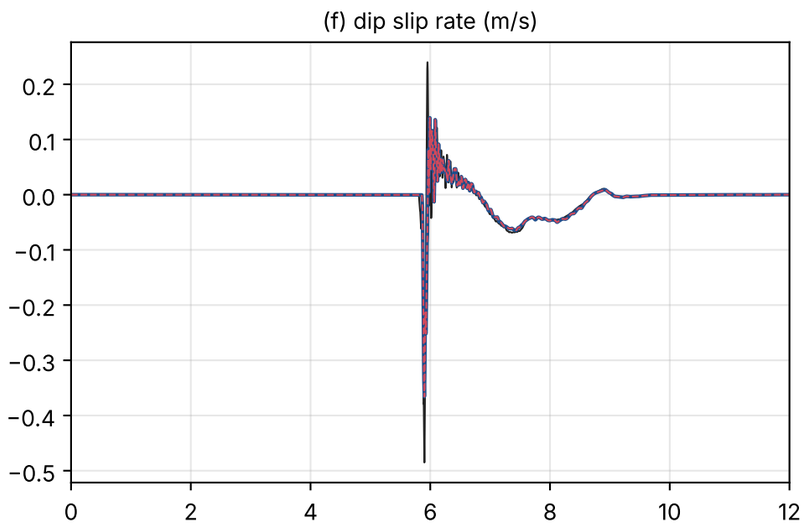


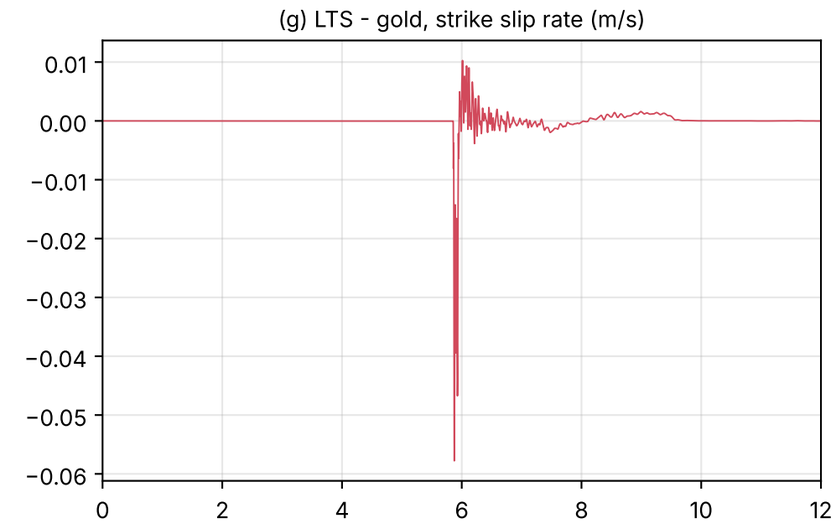


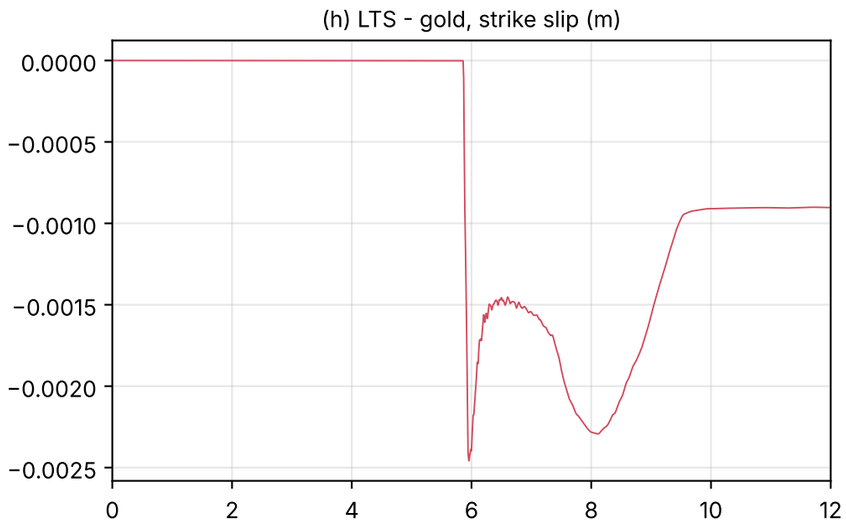

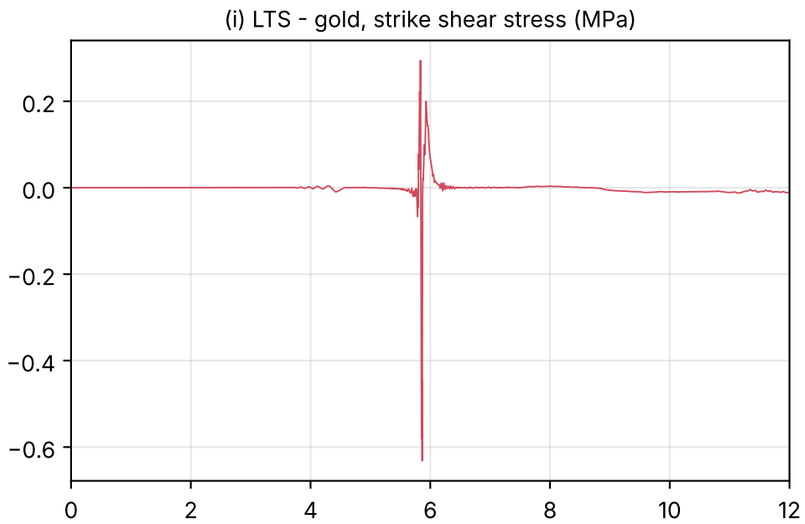


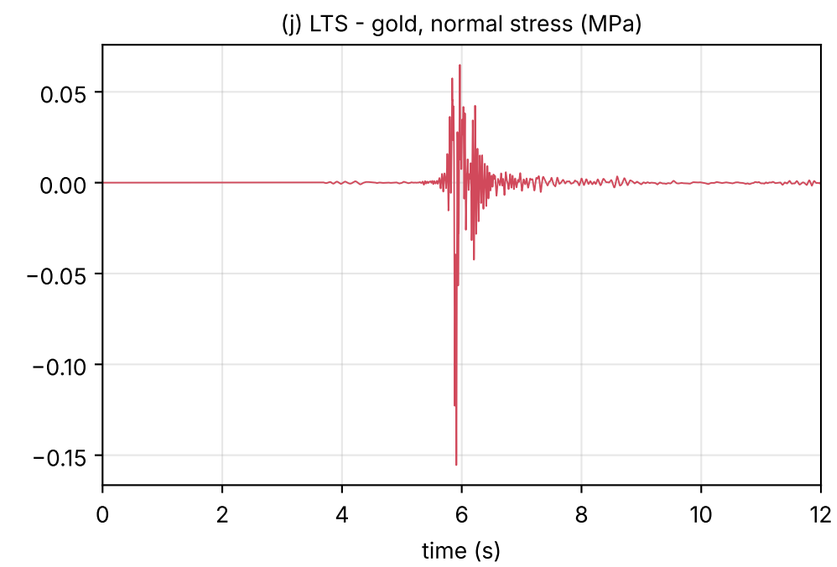

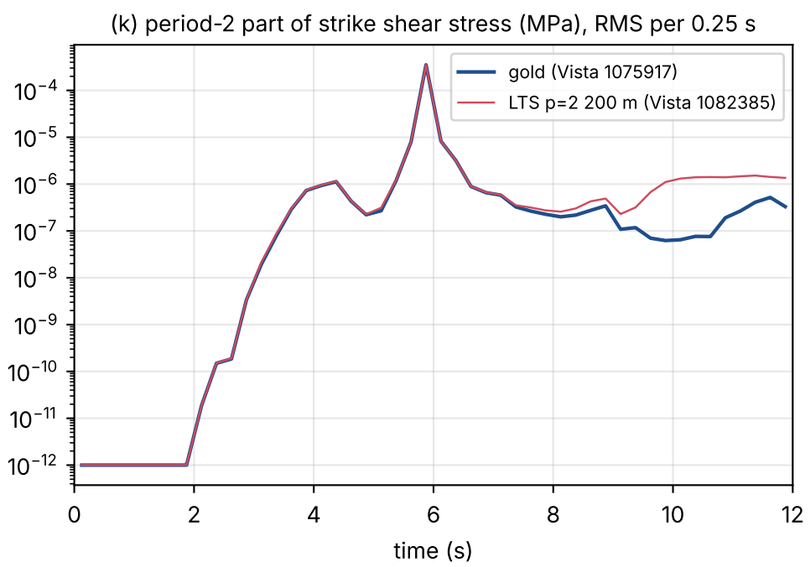

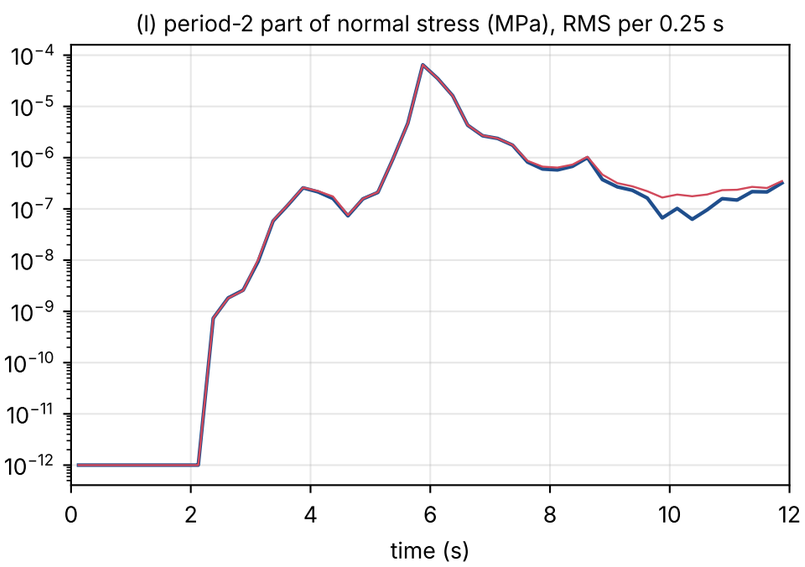


SCEC TPV104 station x2_0_x3_12 (strike 0 km, depth 12 km)
LTS p=2 200 m (Vista 1082385) vs gold (Vista 1075917): arrival +0.11 ms peak +0.224 % final slip -0.005 %; vs DRDG3D: arrival +0.045 s peak +12.6 % slip +0.10 %

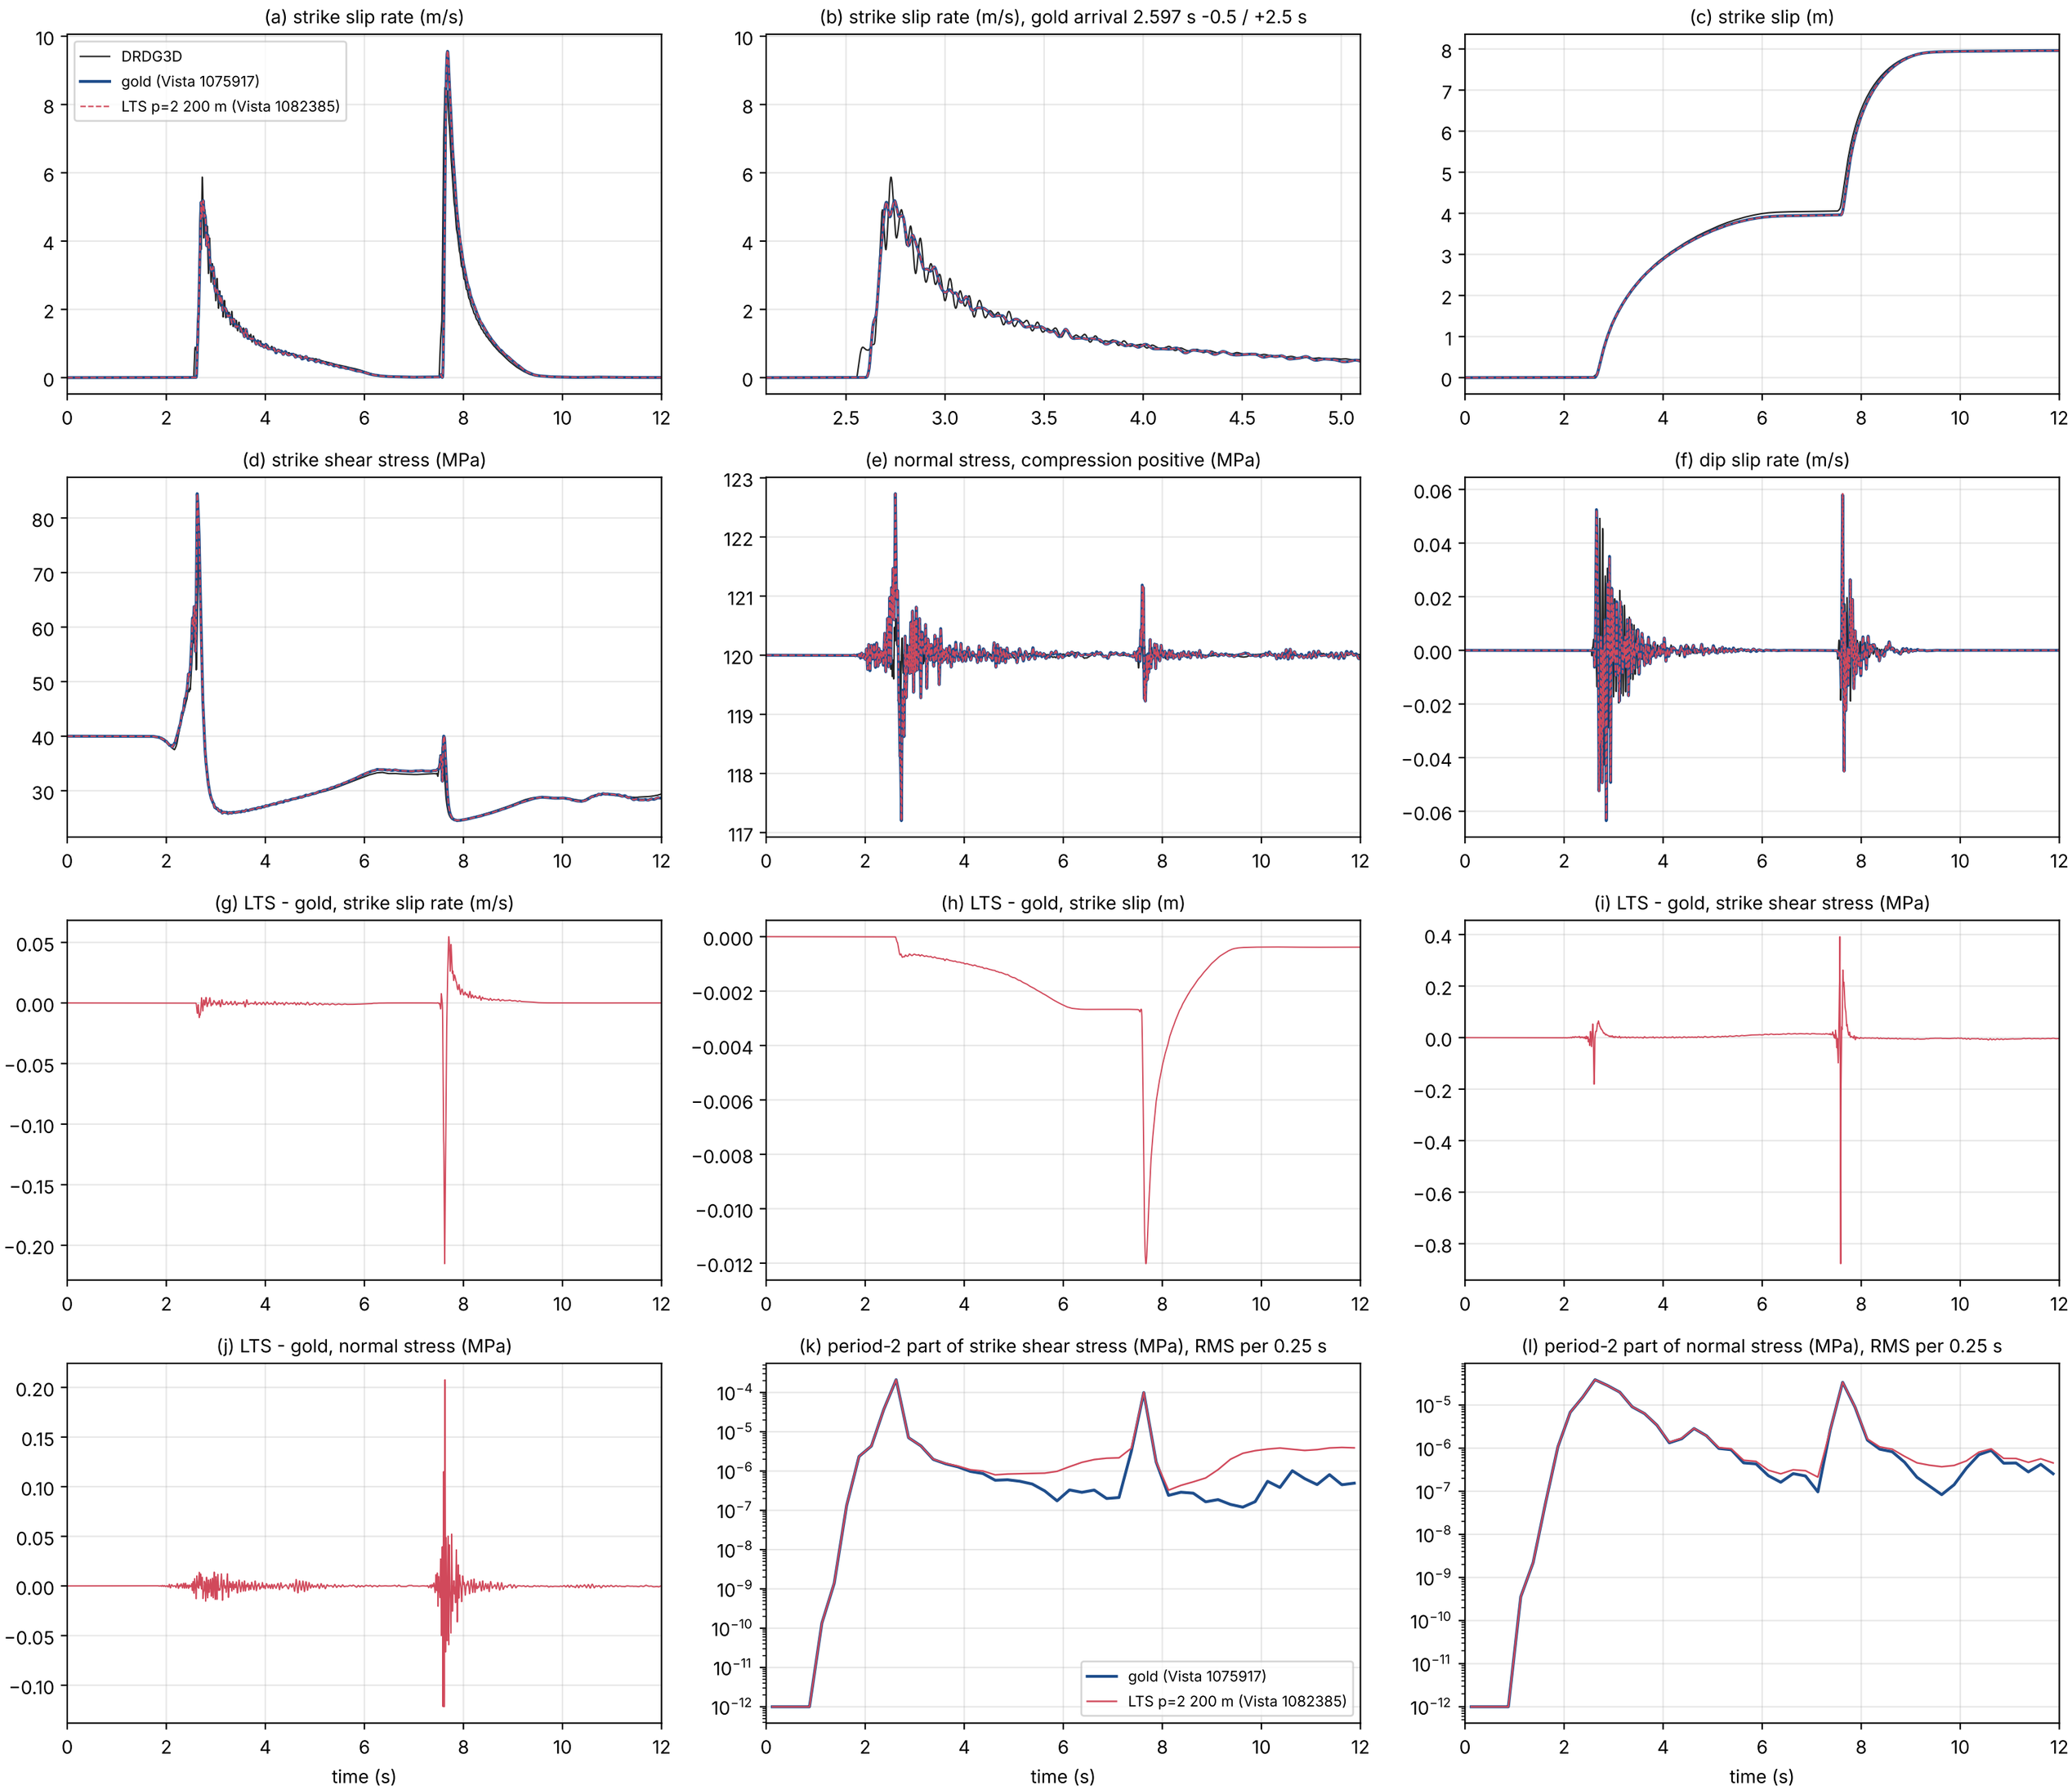


SCEC TPV104 station x2_12_x3_12 (strike 12 km, depth 12 km)
LTS p=2 200 m (Vista 1082385) vs gold (Vista 1075917): arrival +0.23 ms peak -0.039 % final slip -0.017 %; vs DRDG3D: arrival +0.057 s peak -13.5 % slip -0.96 %


(a) strike slip rate (m/s)

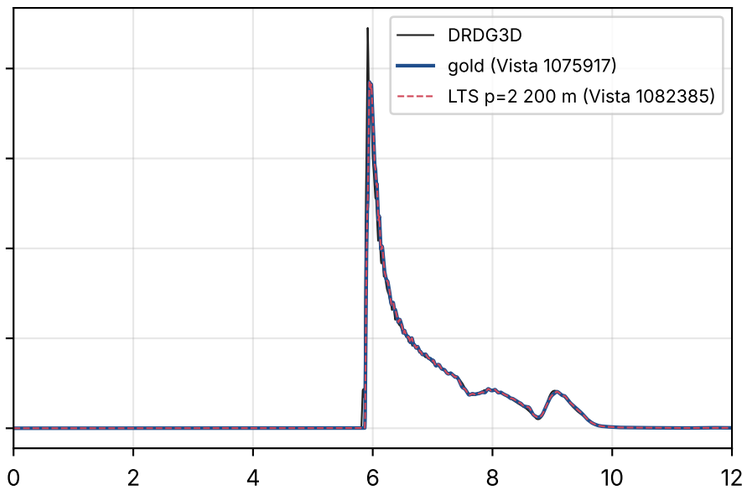


(b) strike slip rate (m/s), gold arrival 5.865 s -0.5 / +2.5 s

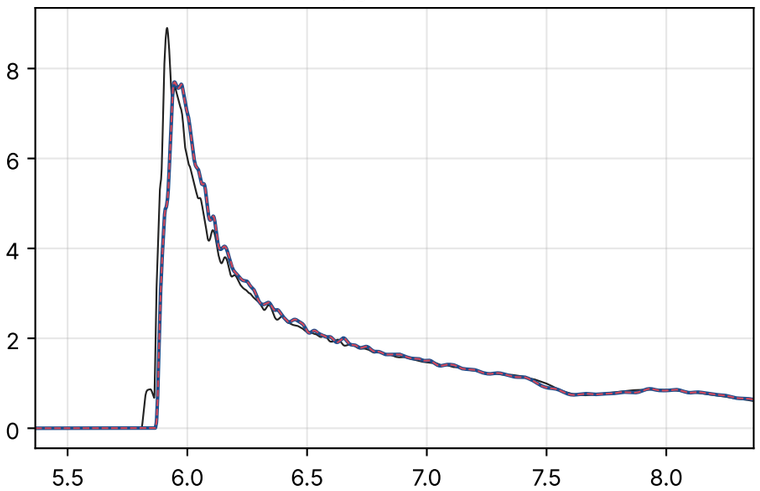


(c) strike slip (m)

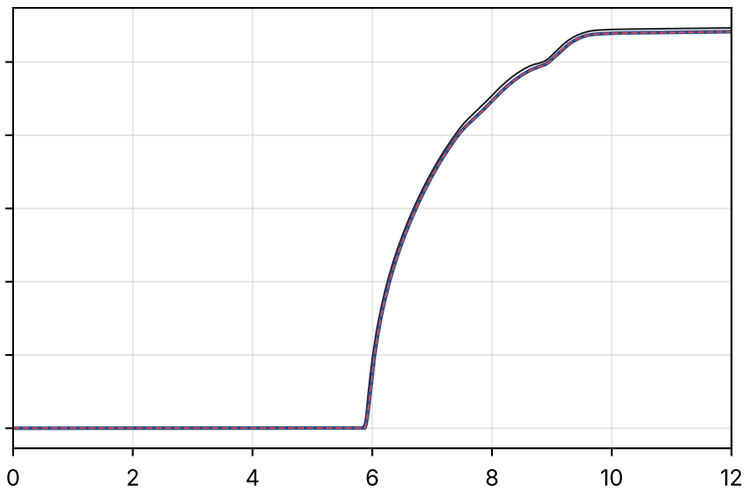


(d) strike shear stress (MPa)

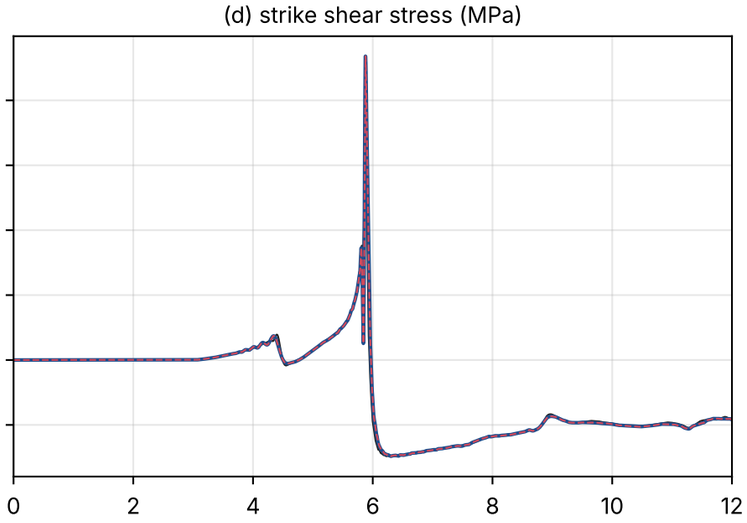


(e) normal stress, compression positive (MPa)

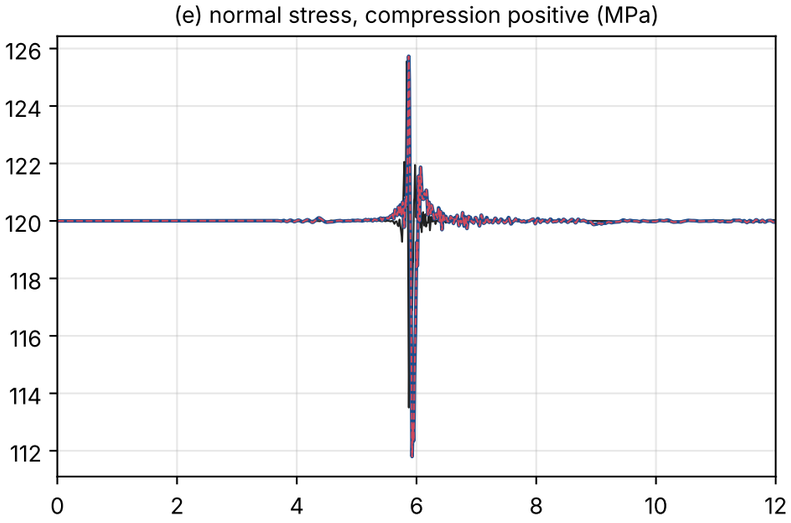


(f) dip slip rate (m/s)

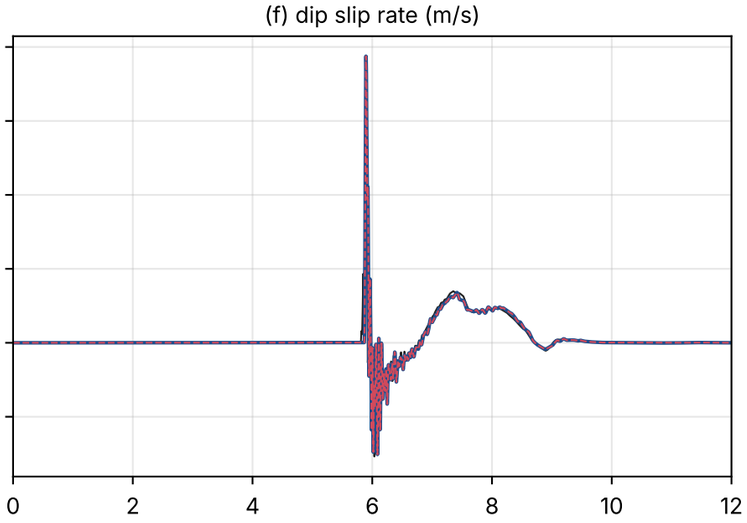


(g) LTS - gold, strike slip rate (m/s)

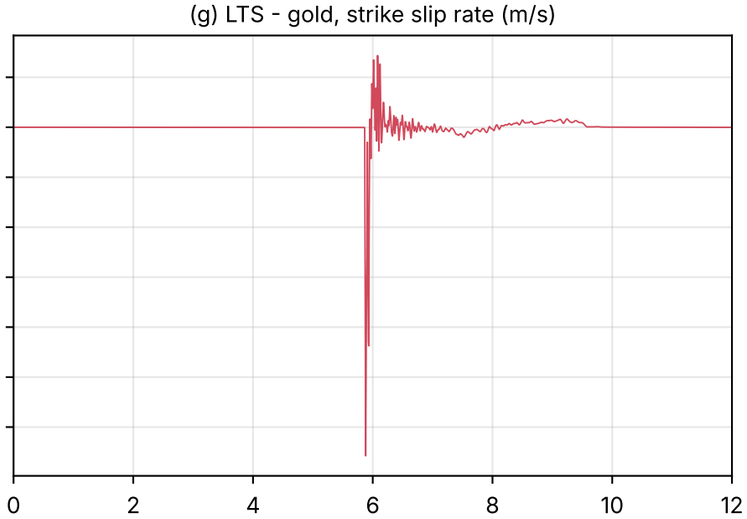


(h) LTS - gold, strike slip (m)

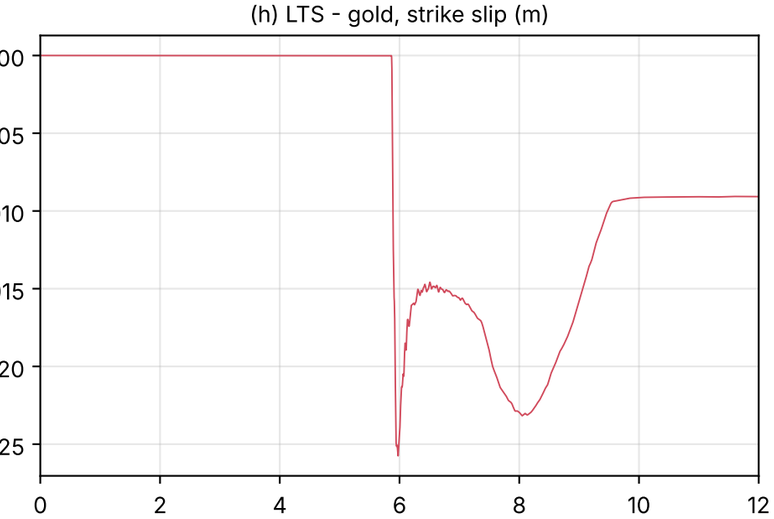


(i) LTS - gold, strike shear stress (MPa)

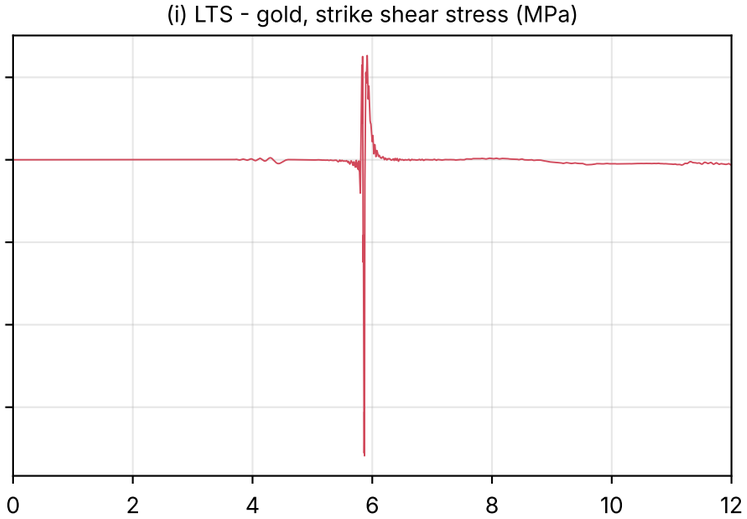


(j) LTS - gold, normal stress (MPa)

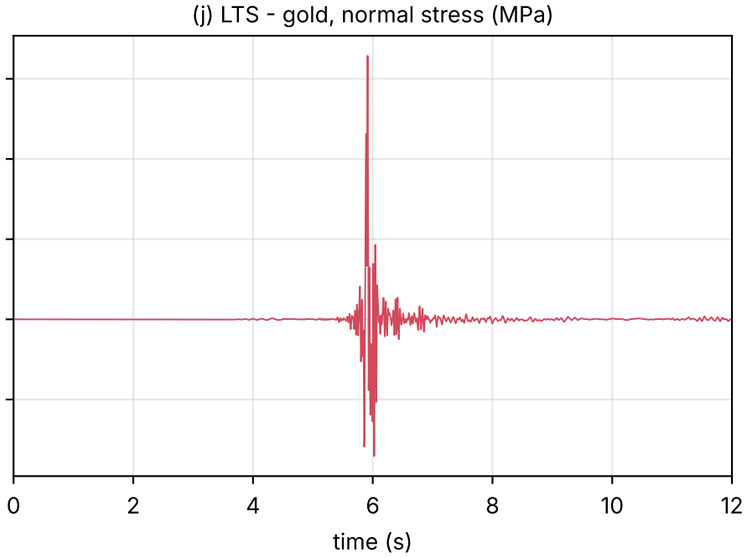

(k) period-2 part of strike shear stress (MPa), RMS per 0.25 s

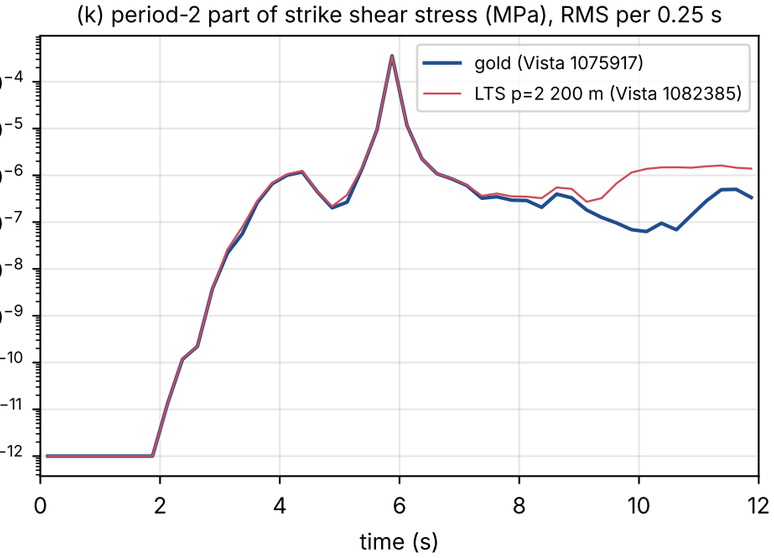

(l) period-2 part of normal stress (MPa), RMS per 0.25 s

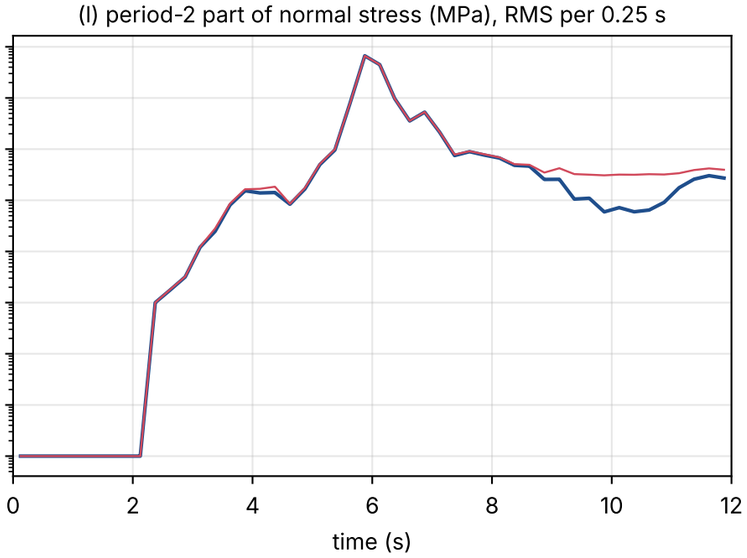

time (s)

time (s)

time (s)