MiSUMi economy Timing Pulleys HTD 5M



H5M
5mm

Representative model: C-HTPA20H5M090-A-N12

28.58 MYR

Shipping from 5 days


CAD 2D 3D

Volume Discount

Quantity	2~9	10~19	20~
Discount	Unit Price	10%	20%

Shipping days may differ by Quantity.
Quantity of volume discount above is for representative Part No. It may differ by the Part.

Keyway Size



N: New JIS (B1301) keyway size table

Nominal Specs	dH7		bJS9		t	Tolerance
N 8	8	+0.015 0	3	±0.0125	1.4	+0.1 0
N10	10					
N12	12	+0.018 0	4	±0.0150	1.8	
N14	14		5		2.3	
N15	15					
N16	16					
N20	20	+0.021 0	6		2.8	

Type & Nominal Width


Belt Type	Pulley Shape	A	W	L
H5M090	A	11	16	-
	B			28
H5M150	A	17	22	-
	B			34

Threaded Hole Size Table (Shaft Bore Specs: P · N)


dH7 Shaft Bore ID	2-M (Coarse Thread)
8~12	M4
13~17	M5
18~20	M6

Pulley Shape

❹ A Shape




❹ B Shape




Shaft Bore Specs.

❺ P Round Hole + Tap



❺ N New JIS keyway + Tap



For Shape A pulley, the tapped holes are set around 120° to avoid interference with the tooth top.
The positions of keyway and tooth are not fixed
Set screws are provided

Material Pulley: Aluminum Alloy
Flange: Aluminum Alloy
Surface Treatment: Clear Anodize

Part Number ❶Type	❷Number of Teeth	❸Belt Type	❹Pulley Shape	❺Shaft Bore Specs. P Hole Dia. d	P.D.	O.D.	F	E
C-HTPA	14	H5M090	A	8·10	22.28	21.14	26	16
		H5M150		8·10				
	15	H5M090		8·10	23.87	22.73	28	18
		H5M150		8·10				
	16	H5M090		8·10	25.46	24.32	32	20
		H5M150		8·10				
	18	H5M090		8·10	28.65	27.51	33	22
		H5M150		8·10				
	20	H5M090		10·12·14	31.83	30.69	36	24
		H5M150		10·12·14				

Part Number ❶Type	❷Number of Teeth	❸Belt Type	❹Pulley Shape	❺Shaft Bore Specs. N Hole Dia. d	P.D.	O.D.	F	E
C-HTPA	14	H5M090	A	8·10	22.28	21.14	26	16
		H5M150		8·10				
	15	H5M090		8·10	23.87	22.73	28	18
		H5M150		8·10				
	16	H5M090		8·10·12	25.46	24.32	32	20
		H5M150		8·10·12				
	18	H5M090		8·10·12	28.65	27.51	33	22
		H5M150		8·10·12				
	20	H5M090		10·12·14	31.83	30.69	36	24
		H5M150		10·12·14				
	22	H5M090		10·12·14	35.01	33.87	40	27
		H5M150		10·12·14				
	24	H5M090		10·12·14	38.2	37.06	45	30
		H5M150		10·12·14·15				
	25	H5M090		10·12·14	39.79	38.65	45	30
		H5M150		10·12·14·16				
	28			10·12·14·20	44.56	43.42	48	35
	30			10·12·14·15·16·20	47.75	46.61	52	36
	32			10·12·14·15·20	50.93	49.79	55	40

Detailed specifications are available on the official website

Part Number			❹ Pulley Shape	❺Shaft Bore Specs. P Hole Dia. d	P.D.	O.D.	D	F	E
❶Type	❷Number of Teeth	❸Belt Type							
C-HTPA	14	H5M090	B	8	22.28	21.14	14	26	16
		H5M150		8					
	15	H5M090		8	23.87	22.73	15	28	18
		H5M150		8					
	16	H5M090		8·10	25.46	24.32	17	32	20
		H5M150		8·10					
	18	H5M090		8·10	28.65	27.51	19	33	22
		H5M150		8·10					
	20	H5M090		10	31.83	30.69	19	36	24
		H5M150		10					

Part Number			❹ Pulley Shape	❺Shaft Bore Specs. N Hole Dia. d	P.D.	O.D.	D	F	E
❶Type	❷Number of Teeth	❸Belt Type							
C-HTPA	16	H5M090	B	8	25.46	24.32	17	32	20
		H5M150		8					
	18	H5M090		8·10	28.65	27.51	19	33	22
		H5M150		8·10					
	20	H5M090		10	31.83	30.69	19	36	24
		H5M150		10					
	22	H5M090		10·12	35.01	33.87	24	40	27
		H5M150		10·12					
	24	H5M090		10·12	38.2	37.06	27	45	30
		H5M150		10·12					
	25	H5M090		10·12·14	39.79	38.65	27	45	30
		H5M150		10·12·14					
	28			10·12·14	44.56	43.42	32	48	35
	30			10·12·14	47.75	46.61	33	52	36
	32			10·12·14·20	50.93	49.79	37	55	40


❓Detailed specifications are available on the official website

Ordering Example

Please order after selecting part number and parameters according to the selection steps ❶ to ❺.

Part Number (❶Type · ❷Number of Teeth · ❸Belt Type)	-	❹Pulley Shape	-	❺Shaft Bore Specs. / Hole Dia. (P/N)
C-HTPA20H5M090	-	A	-	N12

Example

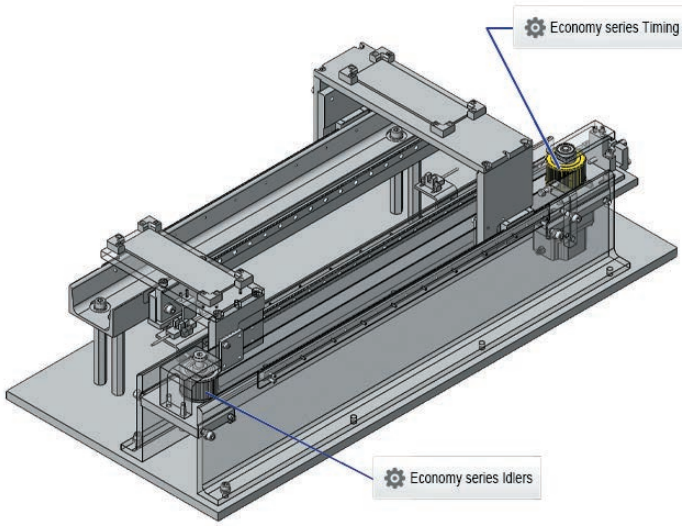

· Specifications

Purpose · Action

· A mechanism that shuttles a 2-stage positioning stage for transferring workpieces.

· Rotary motion is converted to linear motion by a motor and timing belt.

· 2 positioning stages are driven by a single driving mechanism.

· Environment · Operability

· An automatic mechanism that drives 2 positioning stages by a single driving mechanism.

· Structure and design points

· 2 belt travel directions can be obtained after rotating the motor, both can fix the positioning stage.

· Image recognition is performed, and workpieces are transferred by multi-axis robots, and rough stopping accuracy is sufficient.

· The plate is welded under the groove to increase the plate thickness that is reduced due to the fixed surface processing.

· Micro optical sensors for origin determination and micro optical sensors (to prevent over-travel) have been used as a measure to prevent failure.

· Crossing of upper and lower positioning stages may result in injury. Therefore, this unit is provided with a cover outside the surrounding components or devices to ensure that it can be used in places inaccessible to hands.

How to search on website

By Type — Search on MISUMI official website: C-HTPA

By Keyword — Step 1 ▸ Input Search Keyword: pulley htd — Step 2 ▸ Select Brand: MISUMI economy

Brand: MISUMI, Economy series

Contact Us:
Tel: (60)3 7890 6399
Email: cs@misumi.com.my
Operation Hour: 9am - 6pm (Mon - Fri), 9am - 1pm (Sat)

MISUMI Web "Chat" | Technical Support | Inquiry

MISUMI economy Timing Belts HTD 5M type

Representative model: C-HTBN260H5M-150



9.28 MYR


Shipping from 9 days


Volume Discount

Quantity	2~49	50~99	100~
Discount	Unit Price	10%	20%

Shipping days may differ by Quantity.
Quantity of volume discount above is for representative Part No. It may differ by the Part.

Material			
①Back Rubber	②Tooth Rubber	③Core Wire	④Tooth Fabric
Chloroprene Rubber	Chloroprene Rubber	Glass Fiber	Nylon Cloth

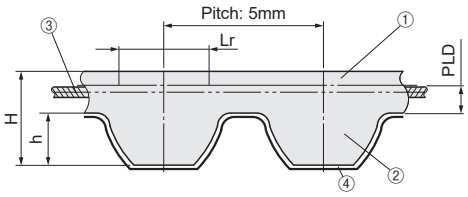



Types	Nominal Width	Pitch (mm)	Lr	H	h	PLD
H5M	90 (9mm) 150 (15mm) 250 (25mm) 300 (30mm)	5	3.05	3.8	2.06	0.5715

Belt circumference length is core wire length.
Belt operating temperature range: -10 to 90 °C.
The model engraved on the back of the product is the factory-managed model, which may be different from the actual product.
For the transmission capacity and calculation and design method of economy series timing belt, please refer to the national standard (GB) design manual.

Part Number		③Nominal Width	Number of Teeth	Belt Circumference Length (mm)
①Type	②Belt Number			
C-HTBN	175H5M	90 (9mm) 150 (15mm) 250 (25mm) 300 (30mm)	35	175
	180H5M		36	180
	185H5M		37	185
	200H5M		40	200
	210H5M		42	210
	215H5M		43	215
	220H5M		44	220
	225H5M		45	225
	230H5M		46	230
	235H5M		47	235
	245H5M		49	245
	250H5M		50	250
	255H5M		51	255
	260H5M		52	260
	265H5M		53	265
	270H5M		54	270
	275H5M		55	275
	280H5M		56	280
	285H5M		57	285
	290H5M		58	290
	295H5M		59	295
	300H5M		60	300
	305H5M		61	305
	310H5M		62	310
	320H5M		64	320
	325H5M		65	325
	330H5M		66	330
	335H5M		67	335
	340H5M		68	340
	345H5M		69	345
	350H5M		70	350
	355H5M		71	355
	360H5M		72	360
	365H5M		73	365

Part Number		③Nominal Width	Number of Teeth	Belt Circumference Length (mm)
①Type	②Belt Number			
C-HTBN	370H5M	90 (9mm) 150 (15mm) 250 (25mm) 300 (30mm)	74	370
	375H5M		75	375
	380H5M		76	380
	385H5M		77	385
	390H5M		78	390
	395H5M		79	395
	400H5M		80	400
	405H5M		81	405
	410H5M		82	410
	420H5M		84	420
	425H5M		85	425
	430H5M		86	430
	435H5M		87	435
	440H5M		88	440
	450H5M		90	450
	460H5M		92	460
	465H5M		93	465
	470H5M		94	470
	475H5M		95	475
	480H5M		96	480
	490H5M		98	490
	495H5M		99	495
	500H5M		100	500
	505H5M		101	505
	510H5M		102	510
	515H5M		103	515
	520H5M		104	520
	525H5M		105	525
	530H5M		106	530
	535H5M		107	535
	540H5M		108	540
	545H5M		109	545
	550H5M		110	550
	560H5M		112	560