MagicPos SR1 Instructions V1.0.0

Document revision history:

Version	Date	Reason
V1.0.0	2022-6-20	First version, creating document

Disclaimer:

This document does not convey, by implication, estoppel or otherwise, any patent, trademark, copyright or proprietary right of the Company or any third party or any right or license thereunder. If the connection or operation is not in accordance with the requirements of the manual, the company will be exempted from liability.

Please contact us for the latest specifications before ordering.

MagicPos SR1 Instructions

Catalog

Document revision history:	2
1 General	
2 Product Specifications	4
3 Product Operation Instructions	5
3.1 Switching on and off	5
3.2 Led indicator	6
3.3 DEMO Description	6
4 Technical support	9

1 General

SR1 card reader is a card reader integrating magnetic track, contact and non-contact radio frequency. It adopts advanced radio frequency receiving circuit design, has the function of inserting brush, has the characteristics of high receiving sensitivity and high performance, and is suitable for various payment fields.

2 Product Specifications

Dimension: 66.7 * 64.7 * 15 mm





3 Product Operation Instructions

3.1 Switching on and off

Press and hold the power button for 3-5 seconds, and the 4 LED indicator lights on the panel will flash at the same time and make a long beep sound, then the startup is completed. The blue light of the side indicator light flashes, indicating that the Bluetooth module has been turned on and can be searched normally.

Long press the power button for 3-5 seconds, the side indicator turns green, the four led indicators on the panel flash at the same time, and then the shutdown is completed.

3.2 Led indicator



3.3 Description of android DEMO


Open the demo application, click the CHECK OUT button in the StartTrasaction interface, and the Bluetooth search will be started for the first time. At this time, SR1 is in the power-on state, and it can be searched as shown below:



Click Connect to complete the Bluetooth connection to the device. Click the envelope on the transaction interface to switch the card reading mode.

For other business functions, please refer to the demo application source code and the API User Manual MagicPos SR1 host SDK Service _ V0.2.docx.



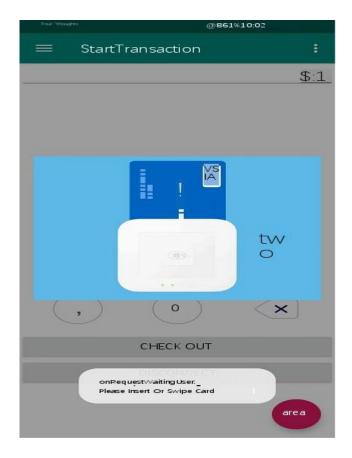



4 Technical support

If you encounter technical problems in the process of research and development and need our assistance, please contact our company at any time.